
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

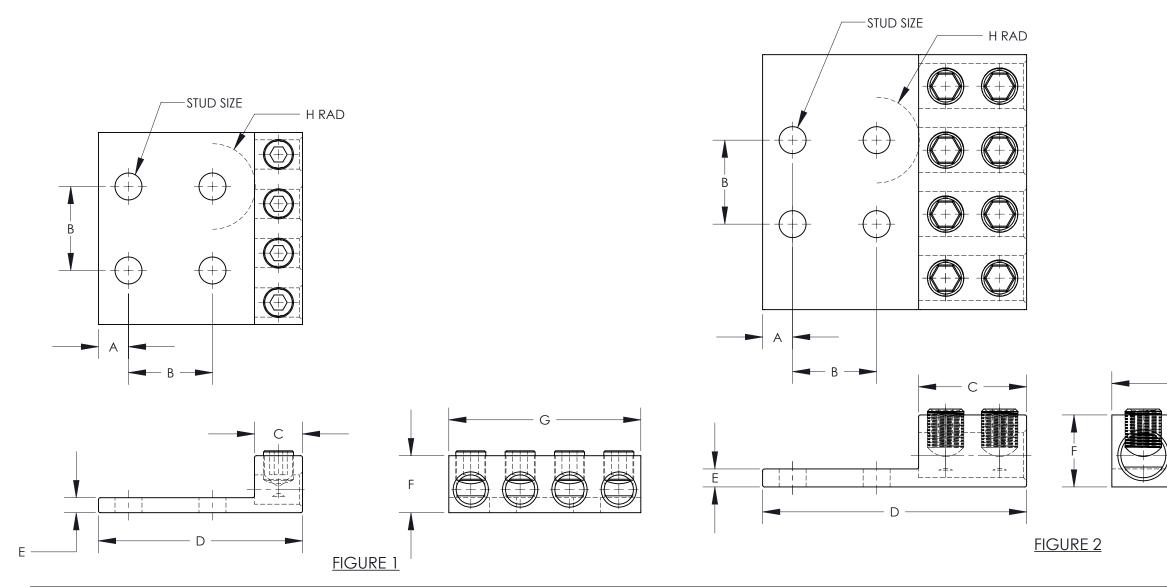

	PART NUMBER	FIGURE	STUD	DIMENSIONS - IN [mm] +/02 [.5]								
			SIZE	А	В	С	D	Е	F	Ġ	н	
	LAM4D250-12-1Y	1	1/2	.63 [16.0]	**1.75 [44.5]	1.00 [25.4]	4.25 [108.0]	.31[7.9]	1.19 [30.2]	4.00 [101.6]	.88 [22.4	
	LAM4D350-12-1Y	1	1/2	.63 [16.0]	**1.75 [44.5]	1.25 [31.8]	4.50 [114.3]	.31[7.9]	1.37 [34.8]	4.72 [119.9]	.88 [22.4	
	LAM4LD600-12-1	2	1/2	.63 [16.0]	**1.75 [44.5]	2.25 [57.2]	5.50 [139.7]	.38 [9.7]	1.50 [38.1]	5.31 [134.9]	.88 [22.4	
	LAM4LD1000-12-1	2	1/2	.63 [16.0]	**1.75 [44.5]	2.75 [69.9]	6.19 [157.2]	.56 [14.2]	1.88 [47.8]	7.11 [180.6]	1.06 [26.9	

* HEX SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART


REV	DATE	BY	СНК	APR	DESCRIPTION	ECN
06	6/15	JHNU	JHNU	RGB	REVISED G DIMENSION FOR LAM4D250-12-1Y: 4.00 WAS 4.04	N41564BA-C41564
07	8/22	JHNU	JHNU	RGB	A. REVISED NOTE 6 TO REFERENCE INSTRUCTION SHEET T-PMPI-223-PC	125543


NOTES:

- 1. MATERIAL: BODY - ALUMINUM, TIN PLATED SCREW - ALUMINUM, TIN PLATED
- 2. UL LISTED & CSA CERTIFIED FOR USE UP TO 600V & TEMPERATURE RATED 90 °C (AL9CU)
- 3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM STRANDED CODE CONDUCTOR
- 4. THESE PARTS ARE ROHS COMPLIANT
- 5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE PANDUIT CMP-100 RECOMMENDED FOR PAD TO PAD AND CONDUCTOR SURFACES

A 6. SEE INSTRUCTION SHEET T-PMPI-223-PC FOR TIGHTENING TORQUE INFORMATION

- 7. PKG QTY: 1 =1
- 8. ** DENOTES NEMA HOLE SPACING



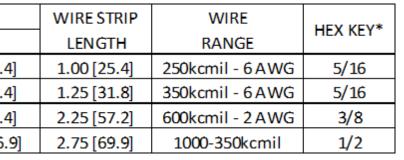

ITLE

LAM4D, LAM4LD SERIES ALUMINUM MECHANICAL LUGS CUSTOMER DRAWING

ITEM REVISION NAM			N4156	4BA/07	PANDUIT			
DATASET FILE NAM		241564	r07.SL	.DDRW				
	SS OTHERW	see notes						
		THIRD ANGLE PROJECTION			DRAWING NUMBER	C41564		
drawn by JHNU	DATE 2/06	^{снк} JHNU	SCALE	NONE	SHEE	T 1 OF 1	BIZE	

