
THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	2/0 AWG	.59 R RE
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	1-5/8 in.	PANDUIT (SB20-12)
Stud Size	1/2 in.	BANDL (Sp. St. St. St. St. St. St. St. St. St. St
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.50±.04
UL Temperature Rating	90° C	3.07±.06 ——
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	BLACK	1.4
Panduit Die Index No. on Barrel	P45	1.4
Alternate Industry Die Index No. ( ) on Barrel	(13)	



.59 R REF

.53±.02 DIA

- Color coded barrel markings

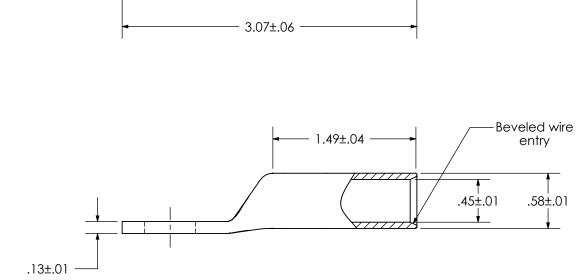



REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	s
01	7/12	JHNU	JHNU	REMOVED NAVY NUMBER FROM TONGUE	N10882OD-LCB2/0-12-CUST	RGB	RGB	L

## CORP. TINLEY PARK, ILLINOIS

LCB2/0-12-X Copper Lug - One-Hole, Long Barrel

DRAWING NO / CAD FILE SCALE N/A

LCB2\_0-12-CUST