

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	JSED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	6 AWG	1.0050
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	REF. REF.
Wire Strip Length	1-1/8 in.	.75±.04
Stud Size	1/2 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.53: (2)
UL Temperature Rating	90° C	4.13±.06
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	BLUE	
Panduit Die Index No. on Barrel	P24	<u> </u>
Alternate Industry Die Index No. () on Barrel	(7)	Wire inspection window





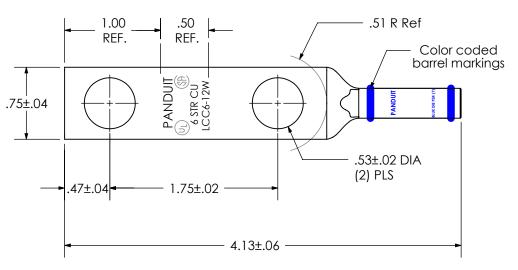

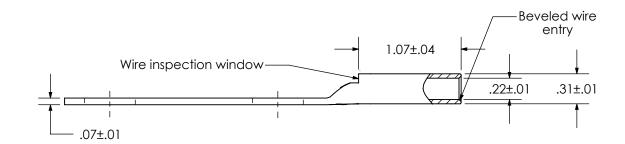

								CORP. TINLEY PARK, ILLINOIS
								LCC6-12W-L Copper Lug - Two-Hole, Long Barrel with Window
03	5/12	JHNU	RGB	REVISED DIMENSION: 4.13 WAS 3.97	N00454AA-LCC6-12W-CUST	RGB	RGB	Copper Log - Two-Hole, Long Barret Will Williaow
REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	SCALE N/A DRAWING NO / CAD FILE LCC6-12W-CUST