THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	1/0 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	1.0 IN
STUD SIZE	5/16 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	PINK
PANDUIT DIE INDEX NO. ON BARREL	P42
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(12)

B DIMENSIONS IN BRACKETS ARE MILLIMETERS

LISTED WIRE CONNECTOR

CERTIFIED

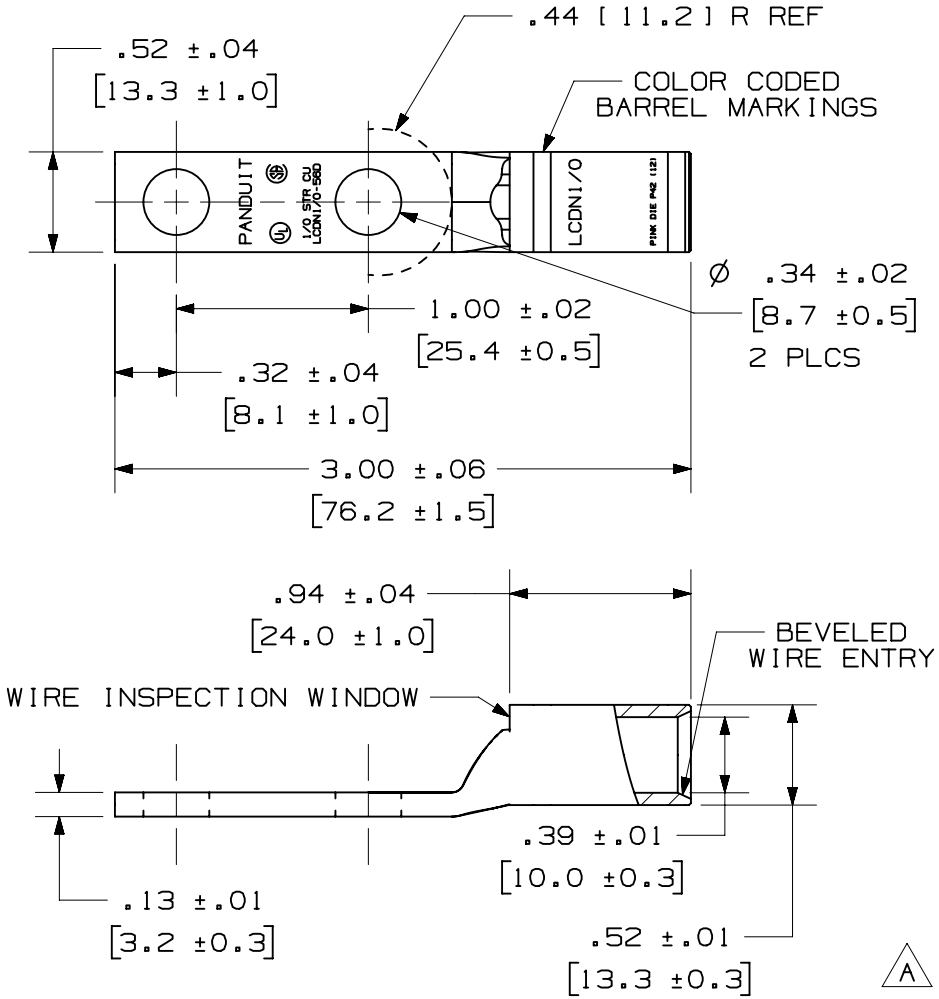

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	4/25/23	JHNU	JHNU	MRWA	B. ADDED DUAL DIMENSIONS A. CONVERTED FROM SW TO NX: DRAWING WAS LCDN1/0-56D-CUST	129383
02A	---	---	---	---	REVISION NOT RELEASED	---

TITLE

LCDN1/0-56D-X

CUSTOMER DRAWING

ITEM REVISION NAME: N10885EI/03

DATASET FILE NAME: N10885EI_DC/03A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±

.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE TABLE

DRAWING NUMBER: N10885EI-DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JHNU	7/05	TLCO	N/A		A

NXGLOBAL_ASIZE