


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



COMPATIBLE PADLOCKS

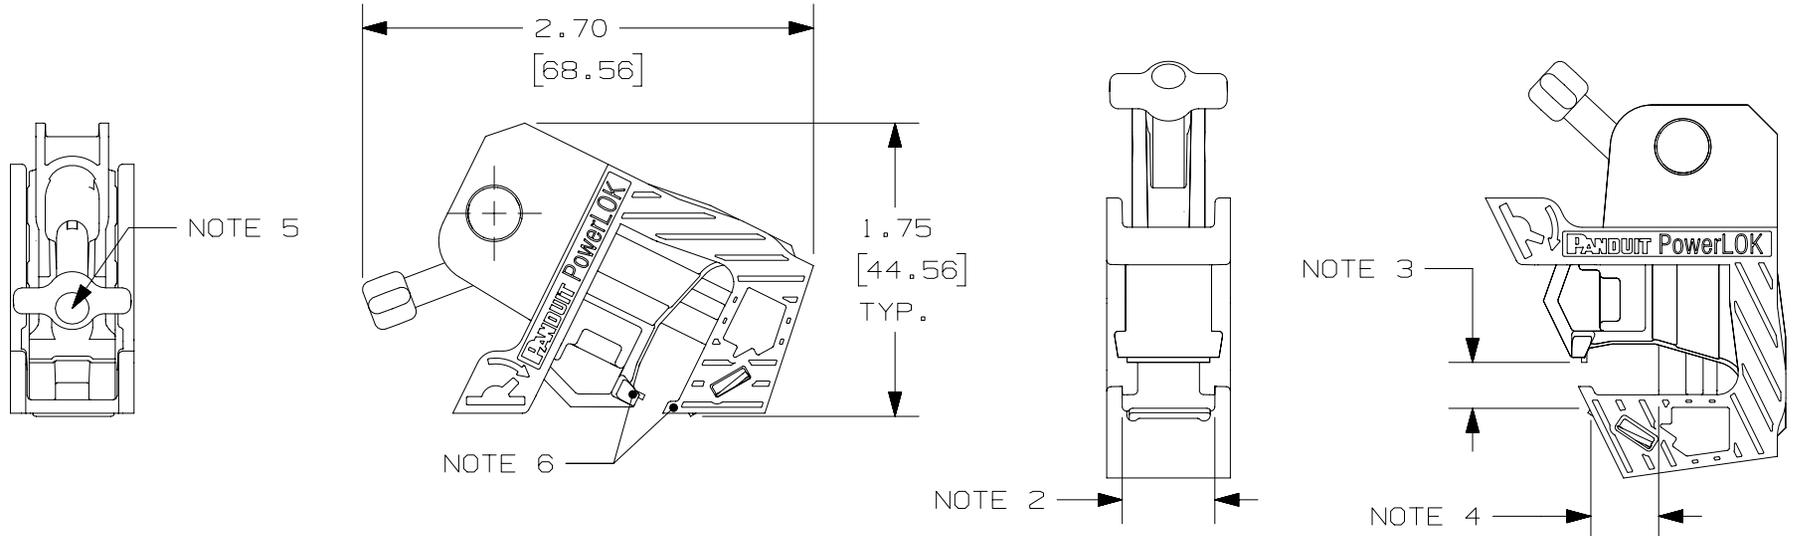

- PSL-7 SERIES
- PSL-8 SERIES
- PSL-12 SERIES
- PSL-CS SERIES

NOTES:

1. MILLIMETERS ARE SHOWN IN BRACKETS
2. MAX SWITCH WIDTH: 0.55 [13.97]
3. MAX OPENING 0.64 [16.26]
MIN OPENING 0.18 [4.57]
4. MAX THROAT DEPTH: 0.40 [10.16]
5. RECOMMENDED TOGGLE SCREW TORQUE: 60 IN-OZ
6. FEATURES INDICATED ALLOW DEVICE TO GRIP EXTERNALLY TIED MULTIPOLE BREAKERS. FEATURES SHOULD BE INSERTED BELOW THE TIE BAR OF EXTERNALLY TIED BREAKERS. ONCE THESE FEATURES ARE POSITIONED, TIGHTEN SET SCREW OF DEVICE TO SECURE BREAKER. DEVICE SHOULD BE CENTERED ON TIE BAR.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				MATERIAL:	
							PSL-PCBNT POWERLOK				PANDUIT RED NYLON	
							CUSTOMER DRAWING					
							ITEM REVISION NAME I00230AA/06				DRAWING NUMBER: C11065	
							DATASET FILE NAME I00230AA_DC_C11065/06B					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .X ± - .XXX ± - .XX ± .01 [.25] ANGLES ± -					
01	4/18/17	RVU	CLW	JHAC	REMOVE PSL-6 SERIES FROM THE REFERENCE.	GAECN04097	THIRD ANGLE PROJECTION					
00	7/16/13	MROB	MJPF	KLN	DRAWING RELEASE	GAECN01042	DRAWN BY DATE CHK SCALE MROB 7/16/13 KLN NTS				SHT 1 OF 1	
											SIZE A	