
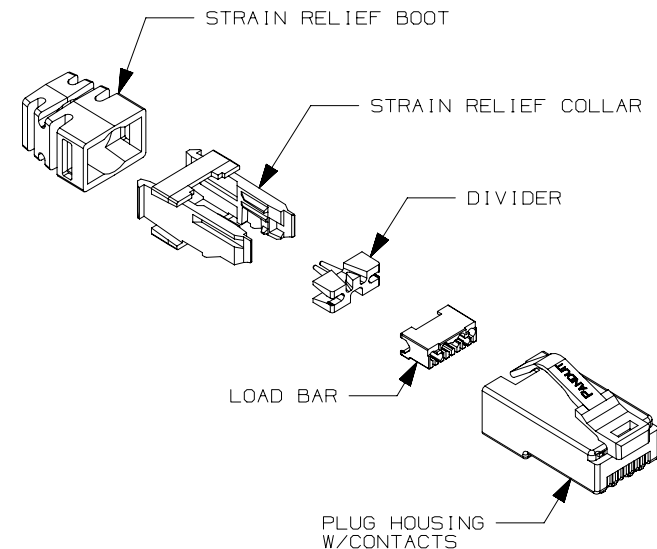



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SP6X88-C	.047 lb/10 PCS (21.4 g/10 PCS)

NOTES:

- CAT 6A UTP MODULAR PLUG FOR USE WITH PANDUIT TX6A 10GIG UTP COPPER CABLE.
- MATERIALS: PLUG COMPONENTS - UL94V-0 RATED POLYCARBONATE, BOOT - PVC, CONTACTS - GOLD PLATED PHOSPHOR BRONZE.
- PLUG DESIGNED AND TUNED EXCLUSIVELY FOR PANDUIT CAT6A UTP HORIZONTAL CABLE (PU*6A04) WITH MATRIX TECHNOLOGY.
 - .310" MAX. OUTER JACKET DIAMETER.
 - .048" MAX. CONDUCTOR INSULATION DIAMETER.
- MEETS DIMENSIONAL REQUIREMENTS OF FCC PART 68 AND IEC 60603-7. ALL DIMENSIONS MAXIMUM UNLESS OTHERWISE SPECIFIED.
- TERMINATED CONTACT HEIGHT DIMENSION: .237 $\pm$.005".
- OPERATING TEMPERATURE: -14°F TO 140°F (-10°C TO 60°C)
- STORAGE TEMPERATURE: -40°F TO 158°F (-40°C TO 70°C).
- RATED TO 2500 MATING CYCLES.
- PLUG ASSEMBLY TOOL - CSPT.
CRIMP TOOL - MPT5-8AS.

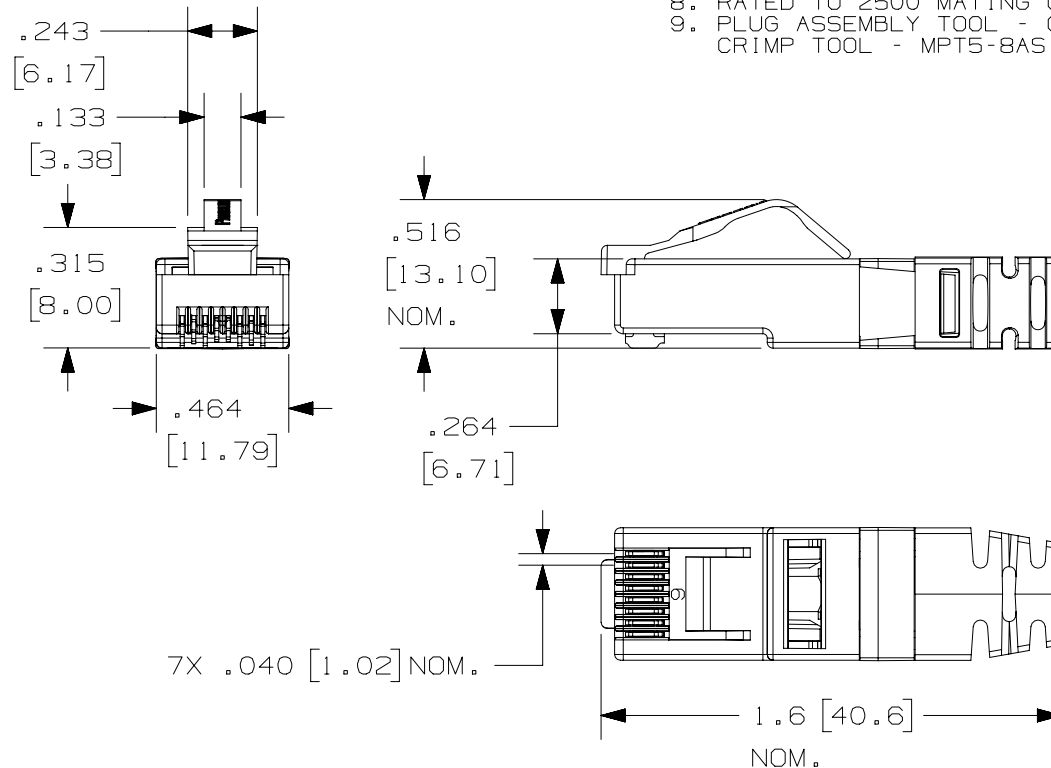

PART NUMBER		SP6X88 - C		
TITLE				
CATEGORY 6A UTP MODULAR PLUG FOR USE WITH PANDUIT TX6A 10GIG UTP COPPER CABLE				
CUSTOMER DRAWING				
ITEM REVISION NAME		M01185CG/03		
DATASET FILE NAME		M01185CG_DC01/03A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:	
.X ± .xxx ± .010 [.3]			SEE NOTES	
.xx ± .03 [.8] ANGLES ±				
			DRAWING NUMBER:	
THIRD ANGLE PROJECTION			M01185CG-01	
DRAWN BY	DATE	CHK	SCALE	SIZE
MDJR	12-21-12	EJH	NONE	
SHT 1 OF 1				A