


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	A CONDUCTOR RANGE	WIRE DIAMETER RANGE - IN	STUD SIZE	HEX NUT	BODY HEX	H ONE CABLE	C	RoHS COMPLIANT
SPF2-8-C	12 SOL - 8 STR	.081-.146	1/4-20	.50 [13]	.38 [9]	1.13 [29]	.25 [6]	YES
SPF2-7-C	8 SOL - 7 STR	.102-.164	1/4-20	.69 [17]	.50 [13]	1.44 [37]	.25 [6]	N/A
SPF2-4-C	10 SOL - 4 STR	.102-.232	5/16-18	.75 [19]	.56 [14]	1.56 [40]	.31 [8]	YES
SPF2-3-C	10 SOL - 3 STR	.102-.260	3/8-16	.81 [21]	.63 [16]	1.63 [41]	.38 [9]	N/A
SPF2-2-C	10 SOL - 2 STR	.102-.292	3/8-16	.88 [22]	.69 [17]	1.94 [49]	.38 [9]	YES
SPF2-1/0-L	2 SOL - 1/0 STR	.258-.375	1/2-13	1.00 [25]	.75 [19]	2.13 [54]	.44 [11]	N/A
SPF2-2/0-Q	2 SOL - 2/0 STR	.258-.419	1/2-13	1.13 [29]	.88 [22]	2.31 [59]	.50 [13]	N/A
SPF2-4/0-Q	1 SOL - 4/0 STR	.289-.528	5/8-11	1.38 [35]	1.13 [29]	2.50 [64]	.63 [16]	N/A
SPF2-350-12	1 STR - 350 kcmil	.332-.682	5/8-11	1.50 [38]	1.25 [32]	2.69 [68]	.63 [16]	N/A
SPF2-500-12	3/0 STR - 500 kcmil	.470-.815	3/4-10	1.81 [46]	1.50 [38]	3.31 [84]	.75 [19]	N/A

NOTES:

1. MATERIAL: HIGH COPPER CONTENT HARD DRAWN ROD
2. USED FOR CONNECTING CONDUCTORS OF VARIOUS SIZES TO EXTERNAL THREADED STUDS.
3. DIMENSIONS IN BRACKETS ARE MILLIMETERS.
4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

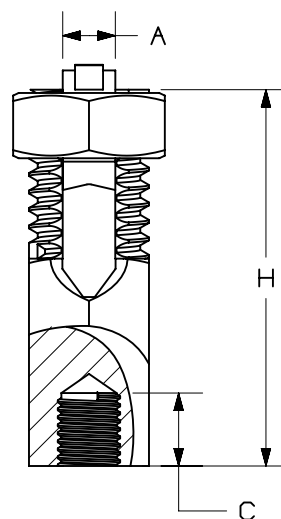

PART NUMBER		SEE TABLE	
TITLE		BRONZE SERVICE POST CONNECTOR - SPF2 SERIES	
CUSTOMER DRAWING			
ITEM REVISION NAME	N41216BA/03		
DATASET FILE NAME	N41216BA-DC/03A		
MATERIAL		SEE NOTES	
DRAWING NUMBER		N41216BA-DC	
DRAWN BY	DATE	CHK	SCALE
TM	7-97	TM	NONE
SHEET 1 OF 1		A	

03A	7-24-23	JHNU	JHNU	MRWA
REV	DATE	BY	CHK	APR

C. REVISED DRAWING NUMBER: N41216BA-DC
 WAS C41216
 B. ADDED RoHS COMPLIANT COLUMN
 A. CONVERTED TO NX

DESCRIPTION

133002

ECN