

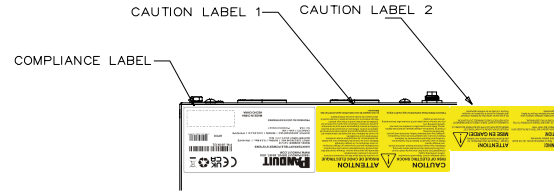



VIEW ROTATED 180°

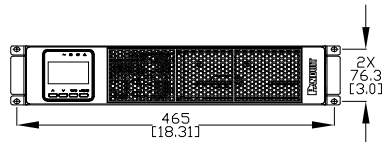

DETAIL A
SCALE 1: 3

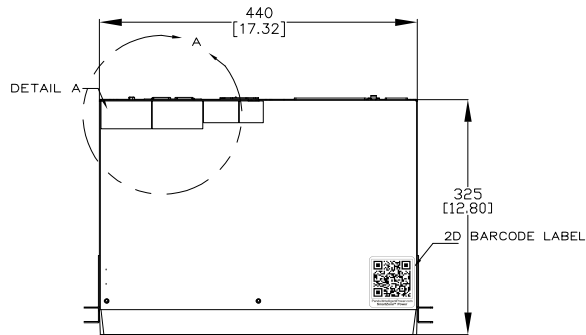

SPECIFICATION:

1. STANDARD:
- | | |
|---------------------------|----------------------------------|
| UPS TOPOLOGY: | DOUBLE CONVERSION |
| KVA: | 1 |
| BATTERY TYPE: | LITHIUM-ION |
| FULL-LOAD RUN TIME (MIN): | 9 MINUTES |
| INPUT PLUG: | SCHUKO CEE 7/EU1-16P AND BS1363A |
| NOMINAL INPUT VOLTAGE: | 220/230/240VAC |
| INPUT PHASE: | SINGLE |
| OUTPUT PHASE: | SINGLE |
| NOMINAL OUTPUT VOLTAGE: | 220/230/240VAC |
| OUTLET TYPE AND QTY: | IEC-C13(8) SOCKET |
| DISPLAY TYPE: | 2.8 INCH, 4 BUTTON |
| PARALLEL PORT SUPPORT: | NO |
| INPUT BREAKER TYPE: | 16A PUSH BUTTON |
| OUTPUT BREAKER TYPE: | N/A |
2. ADDITIONAL:
- NONE
3. ACCESSORY COMPONENTS:
- P/N U01N12L CONTAINS AN INTELLIGENT NETWORK CARD,(INSTALLED)
- STABILIZER BRACKET, QTY:(4)
- INSTALLATION EARS, QTY:(2)
- SAFETY WARNING SHEET,QTY:(1)
- SELECTION GUIDE(POCKET GUIDE),QTY:(1)
- DB9/DB9 RS232 1.5M COMMUNICATION CABLE, QTY:(1)
- USB-A/USB-B 1.2M SERIAL COMMUNICATION CABLE, QTY:(1)
- INCLUDES P/N:ULC024 INTERNAL BATTERY CARTRIDGE, QTY (1),(INSTALLED)
- INCLUDES P/N:URMKIT2 INSTALLATION RAIL KIT, QTY (1),(U01N12L ONLY)
- REFER TO ASSOCIATED DRAWINGS FOR PHYSICAL DIMENSIONS AND SPECIFICATIONS
- EPO PLUG WITH SHORTING WIRE,QTY:(1),(INSTALLED)

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES.
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT.
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING.

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
U01S12L	SMARTZONE UPS, 1kVA, 2U, 230V, SINGLE PHASE, LITHIUM-ION POWER PROTECTION	13.2
U01N12L	SMARTZONE UPS, 1kVA, 2U, 230V, SINGLE PHASE, LITHIUM-ION POWER PROTECTION WITH INTELLIGENT NETWORK CARD	16.5

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT


18900 PANDUIT DRIVE, 60487, USA
WWW.PANDUIT.COM

UNINTERRUPTIBLE POWER SYSTEMS

MODEL NUMBER: 1A1L1E
INPUT: 220/230/240 VAC 1 50/60Hz 1 6.0 A Max. 1 1PH+N+PE
BATTERY INPUT: 25.6 V --- 50 A
OUTPUT: 220/230/240 VAC 1 50/60Hz 1 4.6/4.4/4.2 A 1 1PH+N+PE
CAPACITY: 1 kVA, 1 kW
IGC: 3 kA Protective Class: I

PROHIBIDO SU USO EN EXTERIORES

MADE IN CHINA
HECHO CHINA

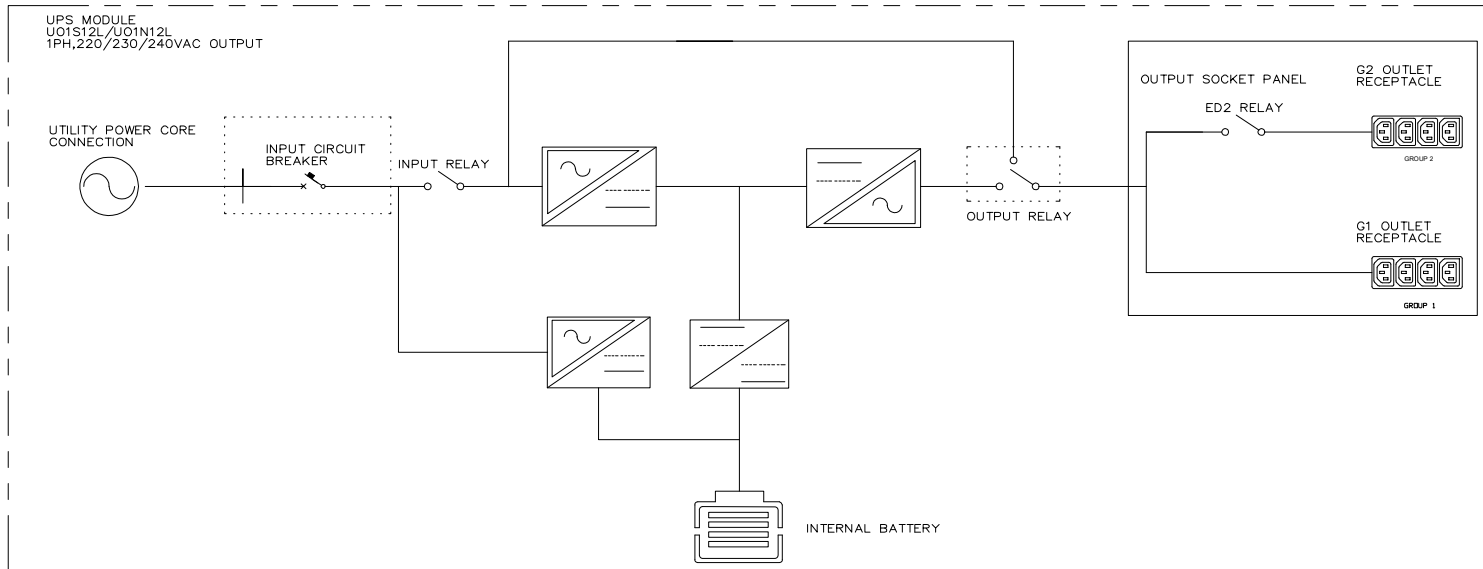

LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER
	RELAY		AC-DC CHARGER
	DC-DC CONVERTER		BATTERY

CORE FIRMWARE PART NUMBER : 3040-6860
CORE FIRMWARE VERSION: V01B000D000

PROJECT FILE				PROJECT FILE			
SPS-EDI-571				SPS-EDI-571			
SEE TABLE				SEE TABLE			
01				01			
SMARTZONE UPS				SMARTZONE UPS			
U01S12L/U01N12L				U01S12L/U01N12L			
CONTROL DRAWING				CONTROL DRAWING			
U01S12L/U01N12L/01				U01S12L/U01N12L/01			
U01S12L/U01N12L-DA/01A				U01S12L/U01N12L-DA/01A			
UNLESS OTHERWISE SPECIFIED				UNLESS OTHERWISE SPECIFIED			
N/A				N/A			
THIRD ANGLE PROJECTION				THIRD ANGLE PROJECTION			
U01N12L-DC				U01N12L-DC			
SHT 1 OF 2				SHT 1 OF 2			