
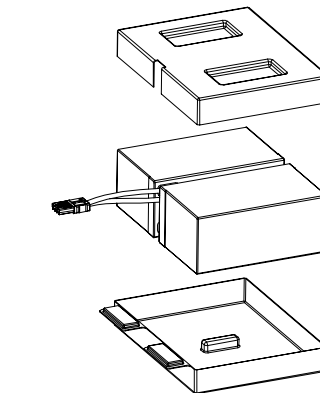



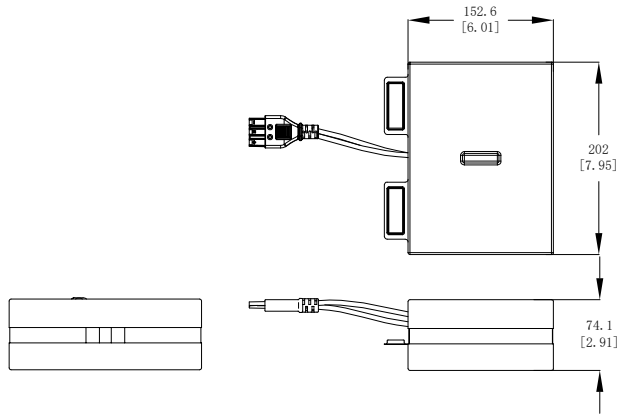

X 1

1. STANDARD:

USE WITH UPS CAPACITY: 24V REPLACEMENT VRLA BATTERY CARTRIDGE FOR 1KVA UPS ONLY
BATTERY TYPE: VALVE REGULATED LEAD ACID—NON SPILLABLE
NOMINAL INPUT/OUTPUT VOLTAGE: 24VDC
BREAKER TYPE: N/A
WEIGHT OF Pb(LEAD): 3.4KG
WEIGHT OF H2SO4(SULFURIC ACID): 0.8KG

2. ADDITIONAL:
NONE

3. ACCESSORY COMPONENTS:
NONE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON—LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. ALL PURCHASED ITEMS CONFORM TO C2—0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVC024	24V REPLACEMENT LEAD ACID BATTERY CARTRIDGE 1KVA LEAD ACID UPS	6



C

BA