


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

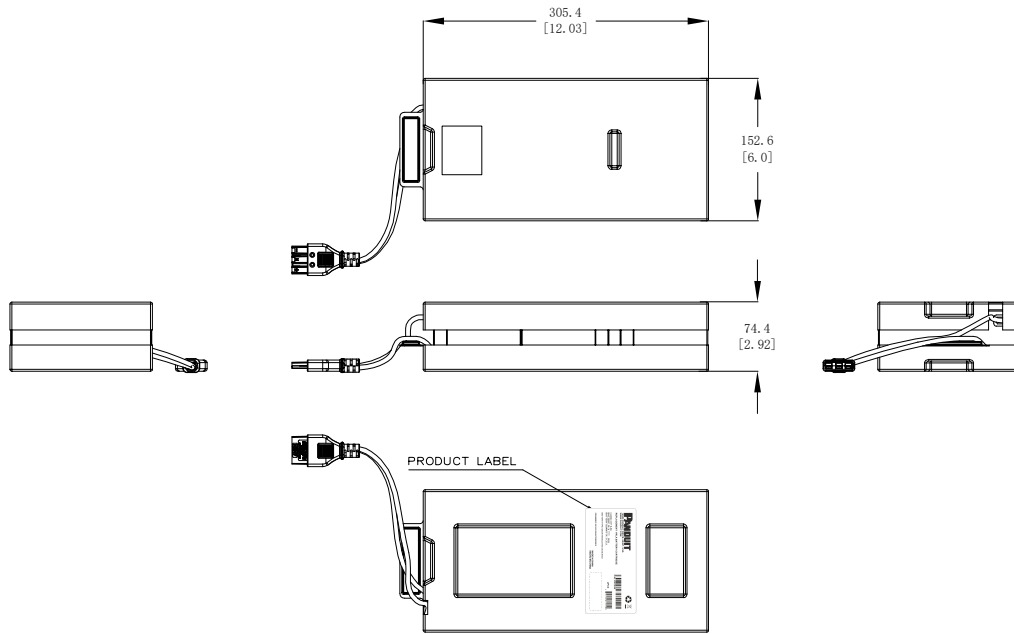

1. STANDARD:

USE WITH UPS CAPACITY: 36V REPLACEMENT VRLA BATTERY CARTRIDGE FOR 1KVA UPS ONLY
BATTERY TYPE: VALVE REGULATED LEAD ACID-NON SPILLABLE
NOMINAL INPUT/OUTPUT VOLTAGE: 36VDC
BREAKER TYPE: N/A
WEIGHT OF Pb(LEAD): 5.1KG
WEIGHT OF H2SO4(SULFURIC ACID): 1.2KG

2. ADDITIONAL:
NONE


3. ACCESSORY COMPONENTS:
NONE

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVC036	36V REPLACEMENT LEAD ACID BATTERY CARTRIDGE 1KVA LEAD ACID UPS	8.68

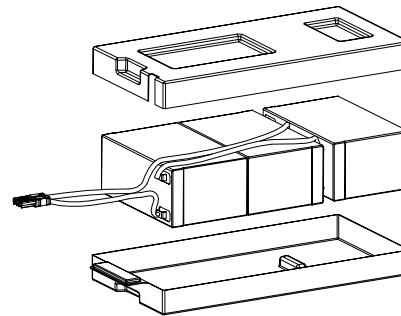

X 1

										SMARTZONE UPS V1RA BATTERY CARTRIDGE UVC036									
										CUSTOMER DRAWING									
										Part									
										UNLESS OTHERWISE SPECIFIED DIMENSIONS TOLERANCES ARE IN (IN)									
										UVC036									
										UVC036									
										 THIRD ANGLE PROJECTION									
										DATE: 03/10/2022									
										MATERIAL: M40									
										SHEET 1 OF 2									
										D									

