

1. STANDARD:

USE WITH UPS CAPACITY: 240V REPLACEMENT VRLA BATTERY CARTRIDGE SET FOR 5-10KVA UPS EBP
BATTERY TYPE: VALVE REGULATED LEAD ACID-NON SPILLABLE
NOMINAL INPUT/OUTPUT VOLTAGE: 240VDC
BREAKER TYPE: N/A
WEIGHT OF Pb(LEAD): 34KG
WEIGHT OF H2SO4(SULFURIC ACID): 8KG

2. ADDITIONAL:
NONE

3. ACCESSORY COMPONENTS:
NONE




NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVD240	240V REPLACEMENT VRLA BATTERY CARTRIDGE SET FOR 5-10KVA UPS EBP (2X 8-BATTERY AND 1X 4-BATTERY CARTRIDGES)	54.8

												SCALE			
												SMARTZONE UPS VLR4 BATTERY CARTRIDGE SET UVD240			
												CUSTOMER DRAWING			
												REV: 001			
												UVD240-DC/00			
												UVD240-DC/00A			
												DIMENSIONS: (UNLESS OTHERWISE SPECIFIED) DIMENSIONS: SQUARES ARE IN MM (IN)			
												N/A			
00A				03/10/2022				DL				ZKZ			
GLM/D/B				RELEASE TO PRODUCTION				UVD240							
REV				DATE				BY				CHK			
APR				DESCRIPTION				ECN				03/10/2022			
2												1			
												THIRD ANGLE PROJECTION			
												UVC240-DC			
												SHT 1 OF 2			
												D			

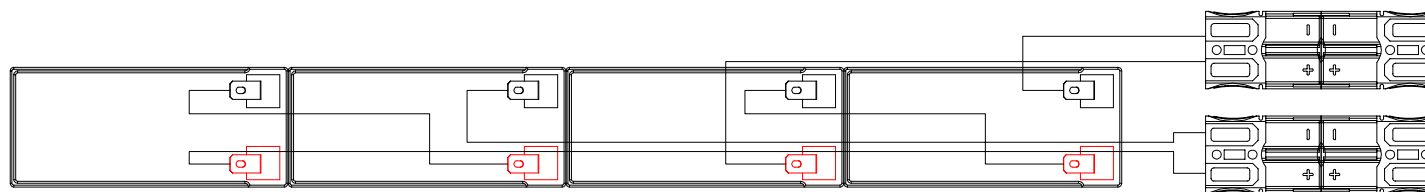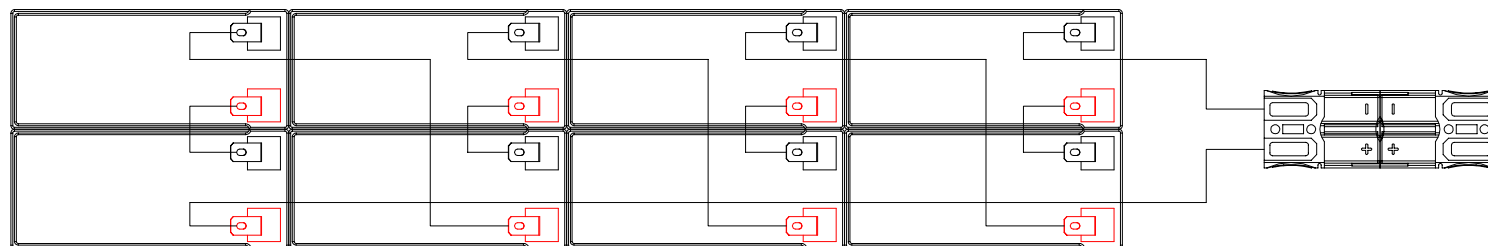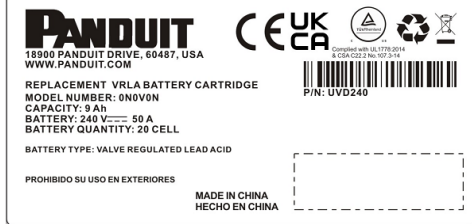

LEGEND					
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER		SA 30
	RELAY		DC-DC CONVERTER (ISOLATED)		MS 50
	CB (CIRCUIT BREAKER)		BATTERY SYMBOL		FUSE
	DC-DC CONVERTER		CONNECTION TERMINAL		BATTERY UNIT

[illegible]