

P31 – EARTH CONNECTION KIT

Reference(s): 31X99X999
31X99X99X



1. USE

Kit for hearth connection.

2. RANGE


■ 2.1 Earth connection kit

Description	Code	Code Export	Weight		Thickness		Coating	Section	
			(Kg)	(lb)	(mm)	(inch)		(mm²)	(inch²)
P31-KIT FOR EARTH CONNECTION	31X99X999	341708	0,013	0,03	0,80	0,03	COPPER	13	0,02

■ 2.2 Earth connection kit for INOX

Description	Code	Code Export	Weight		Thickness		Coating	Section	
			(Kg)	(lb)	(mm)	(inch)		(mm²)	(inch²)
P31-KIT FOR EARTH CONNECTION for INOX	31X99X99X	346474	0,013	0,03	0,80	0,03	COPPER	13	0,02

3.DIMENSIONS (mm/inch)

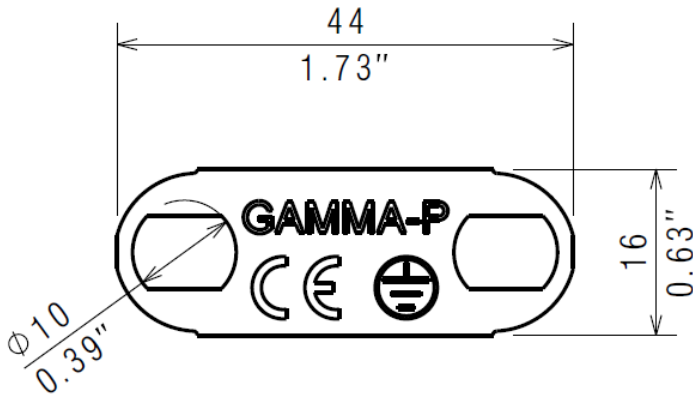


4. INSTALLATION

■ 4.1 Screw

Use screws M5 included into the kit tightened at 5Nm

■ 4.2 Installation

Remove plastic protection from the earth connection and join them together using a copper plate fixed with two screws M5.

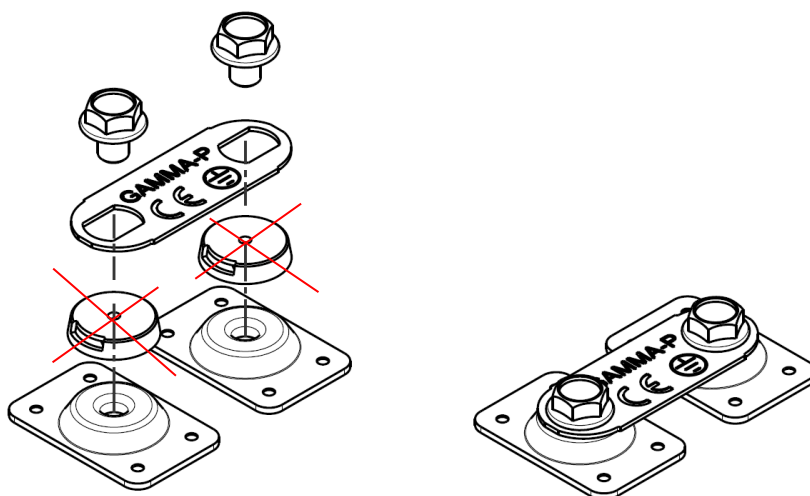

5. TECHNICAL DATA

■ 5.1 Climatic characteristics

Storage and operating temperature: - 20° C à + 120° C

6. CONFORMITY - CERTIFICATION

Comply with CEI 61537 Cable tray systems

Certification: CE, IMQ