

# Multifunction instrument with 1 input "Easy Connect" for 3 Rogowski probes

Code: MFD4ORFCDT1 - MFD4ORFCMT1  
Model: NEMO D4-ec

ROG630M2	ROG1600M2	ROG3200M2	ROG6300M2
∅ 50mm	∅ 100mm	∅ 150mm	∅ 240mm



Contents	Pages
1. Use .....	1
2. Range .....	1
3. Installation .....	1
4. Dimensions .....	1
5. Connections .....	2
6. Operating data .....	3
7. General features .....	3
8. Conformity and certifications .....	5
9. Communication.....	6

## 1. USE

The multifunction instrument measures in 4 dials (active and reactive energies, positive and negative).  
It has a quick connector for the connection of the Rogowski type openable current coil trio (630A/ 1600A/ 3200A/ 6300A).  
The instrument can be used in 3N3E and 3-3E networks, it has a diagnostic and phase sequence correction function.


## 2. RANGE

Code Art.	Output	Inputs	Voltage Range	Aux.	
MFD4ORFCDT1	Modbus	2 Tariffs	3x230/ 3x400±15%	230Vac ±15%	
MFD4ORFCMT1	Mbus				
Code	Rogowski Openable Coils				
	Input (A)	Min. Current (A)	Max. Current (A)	Cable length (m)	Diameter (mm)
ROG630M2	630	12,5	750	2	50
ROG1600M2	1600	32,5	1950	2	100
ROG3200M2	3200	65,0	3900	2	150
ROG6300M2	6300	125,0	7500	2	240
Cable code				Cable length (m)	Quantity
ROGEXTM1	-	-	-	1	x 3 max.
ROGETXM3	-	-	-	3	x 1 max.

## 3. INSTALLATION


### Fixing:

On EN/IEC 60715 symmetrical rail or DIN 35 rail.

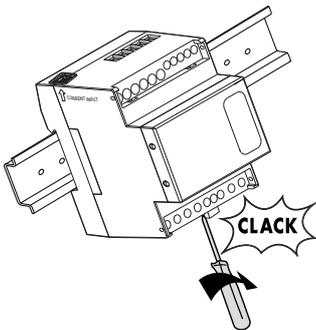


## Operating position:

Vertical, Horizontal, Upside down, On the side



## 4. DIMENSIONS

Housing: 4 DIN43880 modules

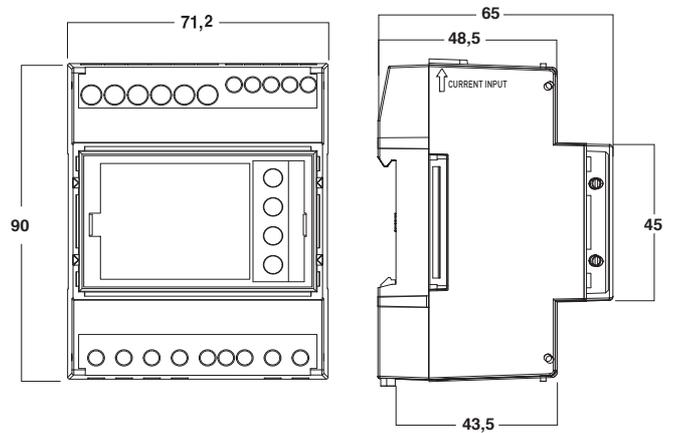

# Multifunction instrument with 1 input "Easy Connect" for 3 Rogowski probes


Code: MFD4ORFCDT1 - MFD4ORFCMT1

Model: NEMO D4-ec

## 5. CONNECTIONS


### Connection diagrams:

- 3-wire or 4-wire three-phase network (3N3E; 3-3N), 3 Rogowski:

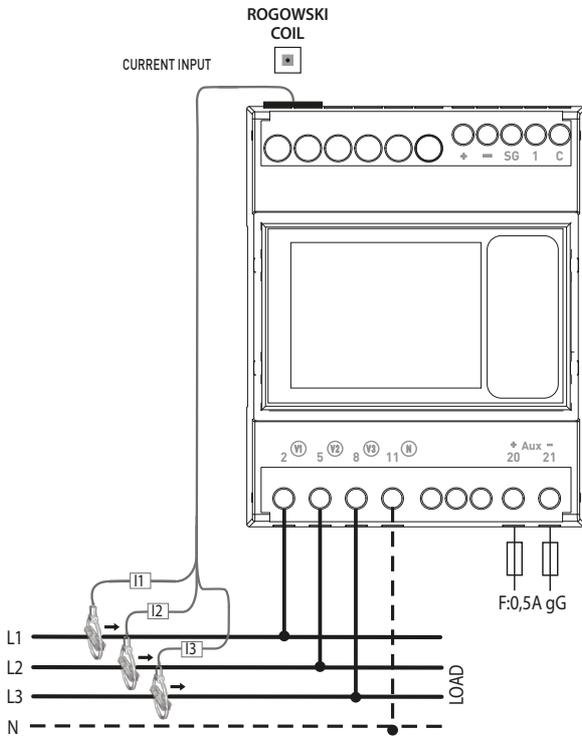

### Marking of communication outputs and tariff inputs:

#### Modbus RS485




#### MBUS




#### Tariff



## 5. CONNECTIONS

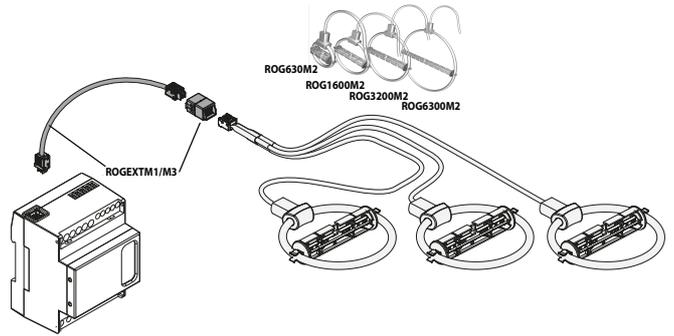


- Rogowski sensor – Cable length

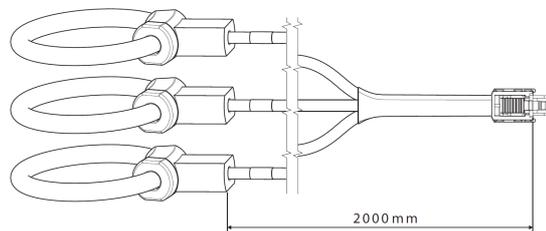

This length can be extended to 5 metres max. with the extension cable + connector (2m Rogowski cable and up to 3m extension cable)

### - ROGEXTM1, ROGEXTM3:


Extension cable for Rogowski coils

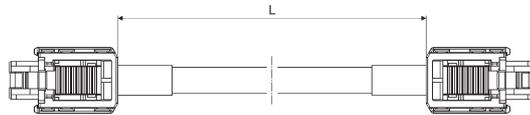

Item code	Length (mm)
ROGEXTM1	1000
ROGEXTM3	3000

Plastic centring support for Rogowski coils

Item code	Length (mm)
ROG630M2	79
ROG1600M2	123
ROG3200M2	173
ROG6300M2	263

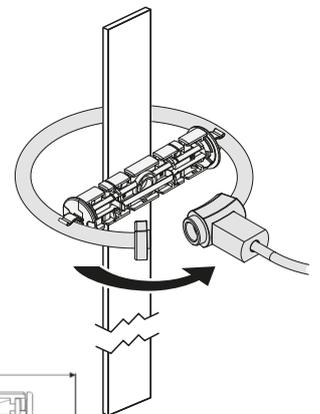

# Multifunction instrument with 1 input "Easy Connect" for 3 Rogowski probes

Code: MFD4ORFCDT1 - MFD4ORFCMT1

Model: NEMO D4-ec

## 6. OPERATING DATA

### 6.1 ELECTRIC DATA

For both MF96ORFCDT1 – MF96ORFCMT1 codes the capacity can be programmed based on the selected Rogowski:

Currents:	I <sub>min</sub>	I <sub>ref</sub>	I <sub>max</sub>
ROG630M2	12,5A	250A	750A
ROG1600M2	32,5A	650A	1950A
ROG3200M2	65A	1300A	3900A
ROG6300M2	125A	2500A	7500A

### V1,V2,V3,N voltages:

- 3x230V / 3x400V ±15%

### V1,V2,V3,N rated frequency:

- F<sub>n</sub>: 50...60Hz

- Permitted variation : 45...65Hz

### Auxiliary power supply (terminals 20 and 21):

- Value U<sub>aux</sub> ca: 230Vca +/-15%

- Rated frequency: 50/60Hz

- Operating frequency: 45...65Hz

- Self consumption: ≤ 2.5VA @230 Vac

### Connectable section:

Terminals	Without bush	With bush
Rigid wire	0,05 + 4 mm <sup>2</sup>	0,05 + 2,5 mm <sup>2</sup>
Flexible wire	0,05 + 2,5 mm <sup>2</sup>	0,05 + 1,5 mm <sup>2</sup>

### Necessary tools:

- For all the terminals, use a 2.5mm slotted screwdriver and/or a PH0 screwdriver. Only for Mbus terminals, use a 2.5mm slotted screwdriver.

## 6.2 MECHANICAL DATA

### Screw terminals:

- Max external dimensions: 10mm

- Lengths of the wire stripping: 6.5 / 7mm

### Screw head:

- COMBI screws (slotted / Phillips head) and slotted head screws only for MBUS terminals


### Recommended torque:

- For all the terminals: 0.5 Nm

## 7. GENERAL FEATURES (continues)

### Cover and front marking:

Front adhesive film and marking by indelible tampography.

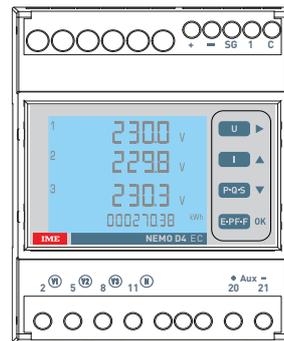

### Display:

- Type: backlit liquid crystal display

- Reading points: 10,000 4 digits (digit height 7mm)

- Energy measure: 8 digit meter (digit height 5mm)

- Resolution: automatic

- Decimal point: automatic

- Update time: 1sec.

### Display of the value and programming:

- By means of the front keypad, 4 pushbuttons (see the user manual).

- Access protected by identification code (**predefined code 1000**)

### Measurements and precision in conformity with EN/IEC 61557-11:

- Current: cl.1

- Voltage: cl.0.5

- Frequency: ± 0,1 Hz

- Instantaneous total active power, phase, average value and max. average value: cl.1

- Instantaneous total reactive power, phase, average value and max. average value: cl.2

- Instantaneous total apparent power, phase, average value and max. average value: cl.1

- Power Factor: cl.1

- Total active energy, positive and negative: cl.1 EN/IEC 62053-21

- Total reactive energy, positive and negative: cl.2 EN/IEC 62053-23

- Tariff active energy: cl.1

**The above classes are guaranteed by maintaining the centring, between Rogowski sensor and primary conductor, with the appropriate accessories provided and a harmonic content within the limits of the EN/IEC 61557-12 standard**

### Average power:

- Measurement: apparent, reactive, active power

- Calculation: moving average, on the selected period

- Average time: 5/8/10/15/20/30/60min.

### Resettable meter:

- Counting of operating hours and minutes

- 8-figure resolution (6 for the hours + 2 for the minutes)

- Maximum display: 999999.99

- Programmable value: 0...50% P<sub>n</sub> (Positive active power)

### Harmonic analysis (THD):

- Up to the 15th harmonic

**Maximum dissipated thermal power for the thermal dimensioning of the panels: ≤ 5W**

## Multifunction instrument with 1 input "Easy Connect" for 3 Rogowski probes


Code: MFD4ORFCDT1 - MFD4ORFCMT1

Model: NEMO D4-ec

### 7. GENERAL FEATURES

#### Digital input

- The digital input allows switching the energy counting on 2 tariffs
- 2 input terminals with common point (1 - C)
- Rated voltage: 12 – 24V d.c., 10mA Max.



#### Features of the ModBus communication port:

- Programmable addresses: from 1 to 247 (5\*)
- Communication speed: 4.8 – 9.6 – 19.2\* – 38.4 kbps
- Parity bit: none, even\*, odd
- Stop bit: 1
- Galvanically isolated with respect to the measurement inputs
- Standard RS485 3 wires, half-duplex
- Modbus® RTU protocol
- Response time (question/response time-out): ≤ 200ms
- 120Ω terminating resistor inside the instrument (it can be set in the SETUP menu, default value: none\*)

#### Features of the MBus communication port:

- Standard: EN 13757
- Transmission: serial asynchronous
- No. of bit: 8
- Parity bit: fixed even
- Communication speed: 300-600-1.200-2.400\*-4.800-9.600bit/s
- No. of primary address: 0\*...250
- No. of secondary address: 0\*...99,999,999
- Load MBus: 1
- Galvanically isolated with respect to the measurement inputs
- Transferred measurements: see communication protocol

#### \* Factory data

#### Diagnostic, Phase sequence correction:

On the device there is a diagnostic and correction algorithm of the voltmetric and amperometric connection sequence. The function can be activated on request and password protected: it can display and modify the wiring sequence with the following limitations:

- 1) The neutral conductor (in the 4-wire connections) must be correctly positioned (terminal 11)
- 2) The power factor must be between 0.9cap and 0.7ind for each phase. See [www.imeitaly.com](http://www.imeitaly.com) "TECHNICAL SUPPORT".

### 7. GENERAL FEATURES

#### Protection class:

- Terminal protection index against solid bodies and liquids: IP 20 (IEC/EN 60529).
- Housing front protection index against solid bodies and liquids: IP 54 (IEC/EN 60529) protecting against vibrations.

#### Protection of the device:

- Fuse 0.5A type gG

#### Resistance to vibrations:

- Vibration: from 5 to 150Hz width 0,15mm/1g
- Shock: 19g / 16msec

#### Material:

BLEND >PC + ABS<;  
Identification according to ISO 11469: >PC<;  
GWFI IEC 60965-2-12 (§1.6mm): 850°C;  
Flame rating UL 94 / IEC 60695\_11\_10 (1.6/3.2 mm): V2;

#### Operating room temperatures:

- Min. = - 20 °C Max. = + 60 °C.

#### Room storage temperatures:

- Min. = - 25 °C Max. = + 70 °C

**Weight:** 0,180Kg

**Packaged volume:** 0,70 dm<sup>3</sup>.

**Room:** mechanical M1 – electric E2

## 8. CONFORMITY AND CERTIFICATIONS

### Insulation

- Measurement categories: III (according to EN-61010)
- Level of pollution: 2
- Insulation voltage,  $U_i$ : 300V, Phase-Neutral

### Dielectric rigidity:

- Power supplies/ Outputs: 3kV / 50Hz / 1min
- Housing / Terminals: 4kV / 50Hz / 1min

### Pulse:

- Power supplies: 6.3kV / 1.2 – 50µsec / 0.5J

### In compliance with the standards:

- Precision class: Active energy class 1 (EN/IEC 62053-21)
- Precision class: Class 2 reactive energy (EN/IEC 62053-23)
- Electromagnetic compatibility: Tests in accordance with EN/IEC 62052-11 / EN 61326-1
- Precision class according to IEC/EN61557-12
- 2014/35/UE 2014/30/UE

### Respecting the environment – Conformity with the CEE directives:

- Compliance with the 2100/65/EU Directive, as modified by the 2015/863 Directive (RoHS 2), on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- Conformity with the REACH Regulation (1907/ 2006): at the date of publication of this document no substance in the annex XIV is found in these products.
- RAEE Directive (2012/19/EU: the sale of this product includes a contribution to the appointed environmental bodies of each European country in charge of handling, at the end of their life, the products falling within the scope of the EU Directive on Electric and Electronic Equipment Waste.

### Plastic materials:

- Plastic materials without Halogens.
- Part marking according to standards ISO 11469 and ISO 1043.

### Packaging:


- Packaging designed and produced in accordance with Decree 98-638 of 20/07/1998 and directive 94/62/CE.

**Multifunction instrument with 1 input**  
**"Easy Connect" for 3 Rogowski probes**


Code: MFD4ORFCDT1 - MFD4ORFCMT1  
 Model: NEMO D4-ec

**9. COMMUNICATION**

**RS485 Modbus wiring diagram:**

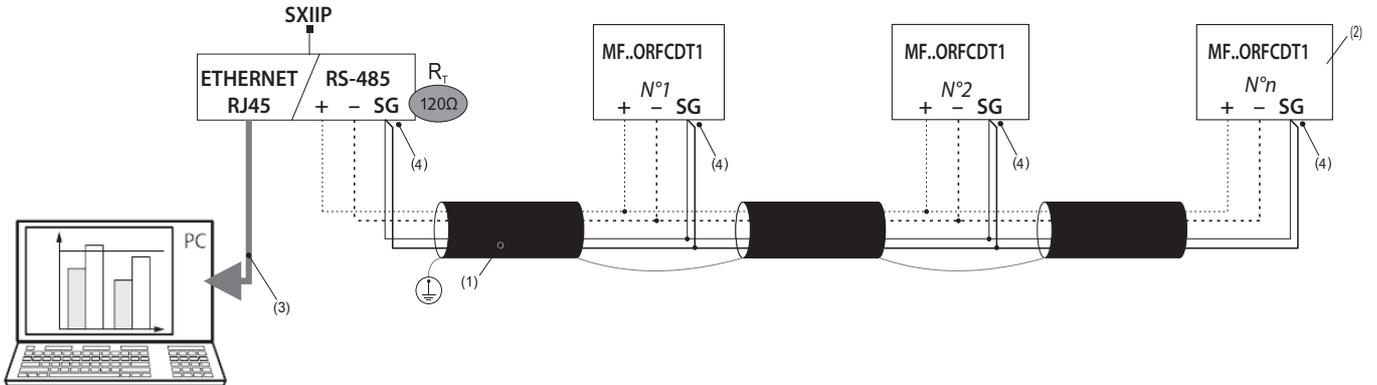


**RS485 Modbus wiring diagram with Mini Web Server:**

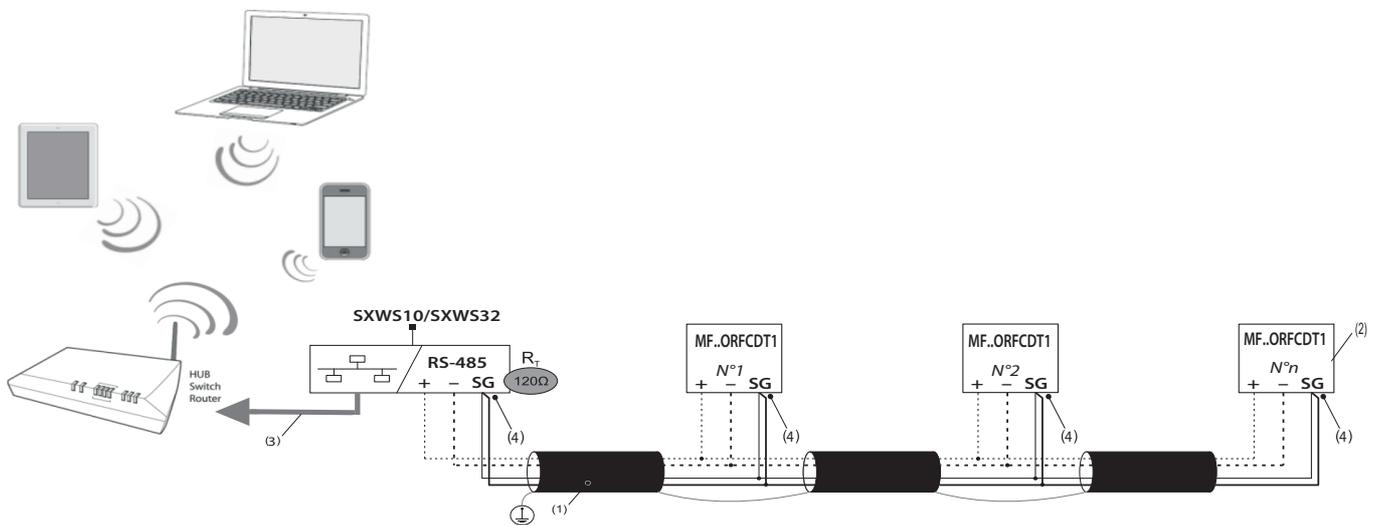

- (1) RS485: Required use of Belden 9842 or Belden 3106A wire (or equivalent) for a maximum bus length of 1000 m, or Category 6 wire (FTP or UTP) for a maximum length of 50 m
- (2) 120Ω terminating resistor inside the instrument (it can be set in the SETUP menu)
- (3) Ethernet: Cat. 6 (FTP/UTP)
- (4) The "SG" terminal must never be connected to the earth

**Mbus wiring diagram:**

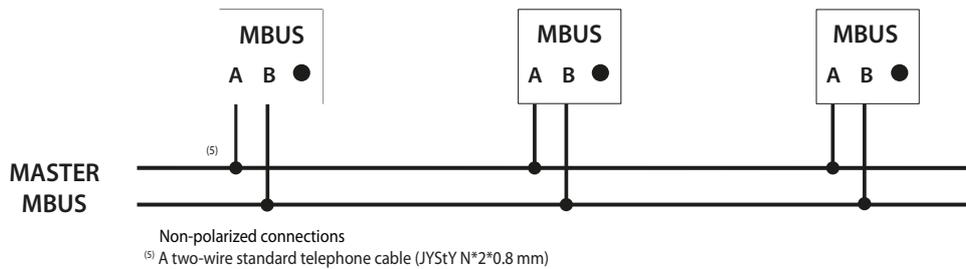

**Communication tables**

- The MODBUS and MBUS communication protocols are available on the <http://www.imeitaly.com> site.