

cudy

cudy

Distributed by  ELCART



ART. 42/98521-00

Model: RE 1200

AC1200

Dual Band Range Extender

 2.4 GHz 300Mbps + 5 GHz 867Mbps Wi-Fi Speed

 2-in-1 WiFi Extender / Access Point


 WPS Quick Setup

 Cudy Whole Home Mesh



Features

- 2.4 GHz 300Mbps+5 GHz 867Mbps Wi-Fi Speed
- Work with any standard router or gateway
- Easily expand wireless coverage at a push of the WPS button
- External antennas for faster and more reliable Wi-Fi
- 2-in-1 WiFi Extender / Access Point
- Easy Setup Assistant with multi-language support

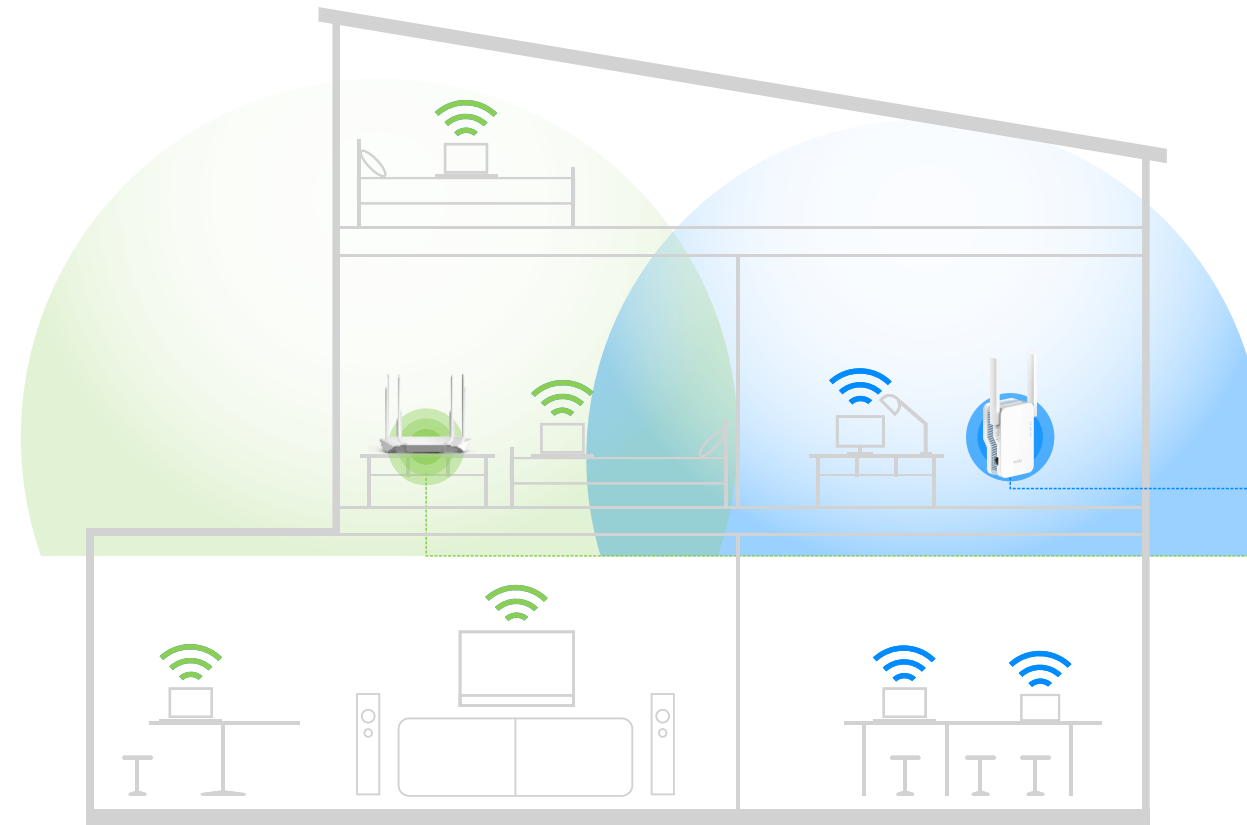

WiFi Range Extender

Boosts the range of your existing WiFi and creates a stronger signal in hard-to-reach areas


Existing WiFi

Sometimes your router does not provide the WiFi coverage you need

Wi-Fi Extender Mode





Access Point Mode

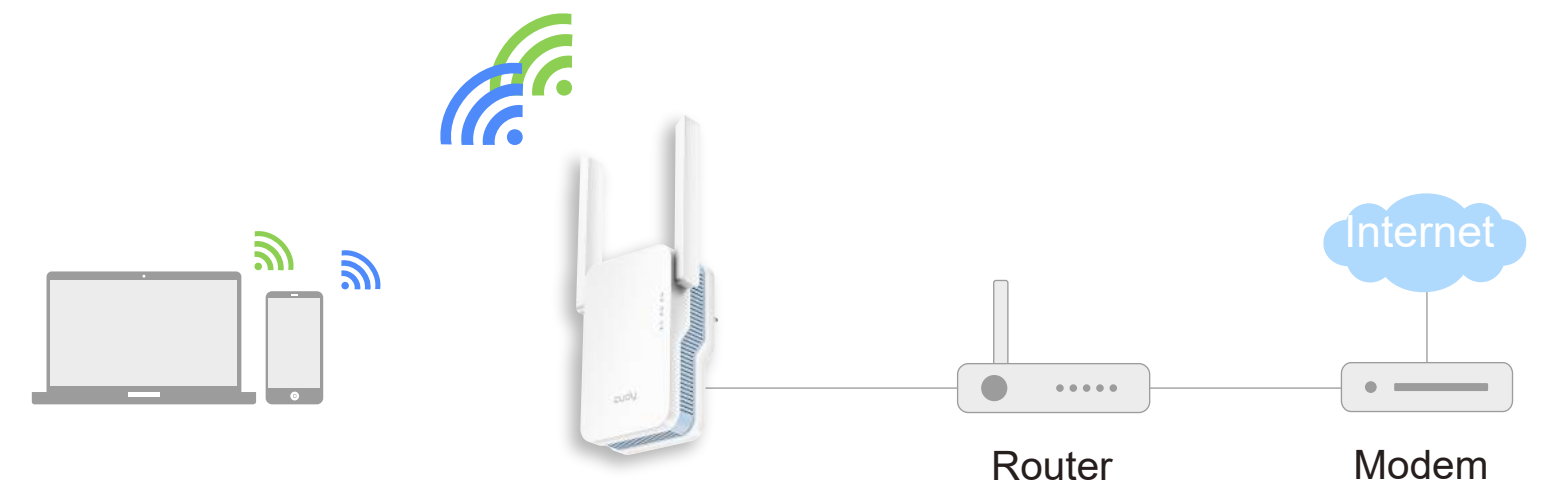




Distributed by ELCART

Say Goodbye to Dead Spots and Buffering

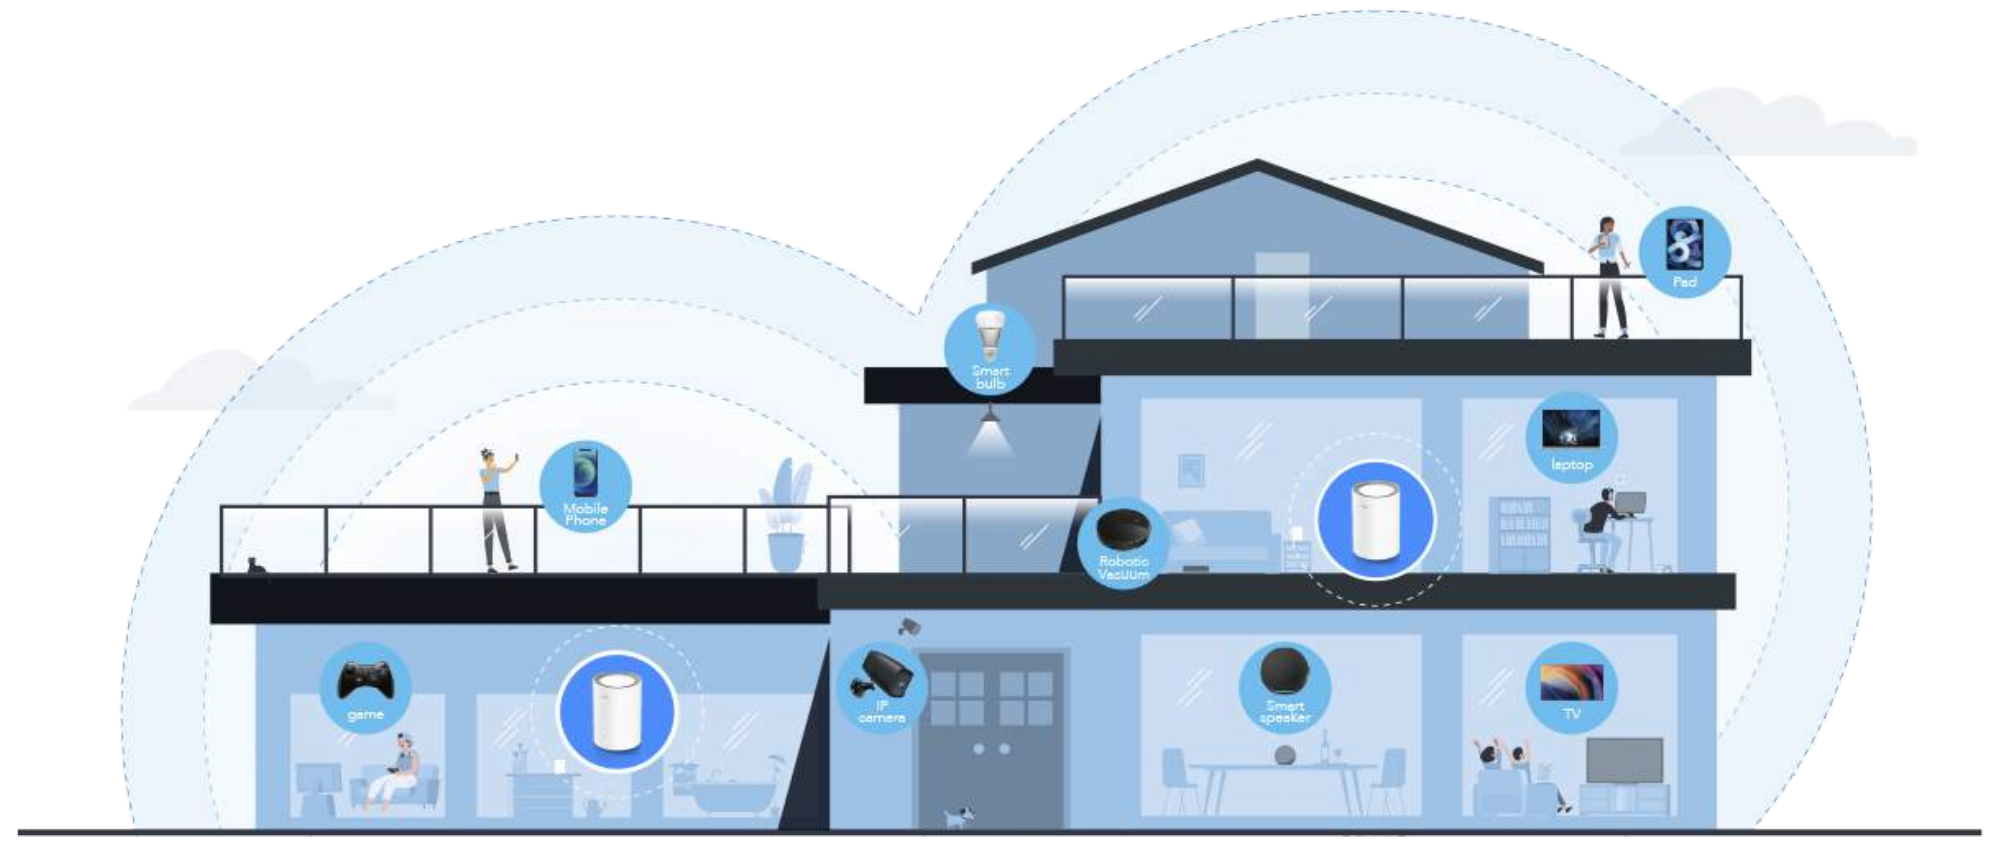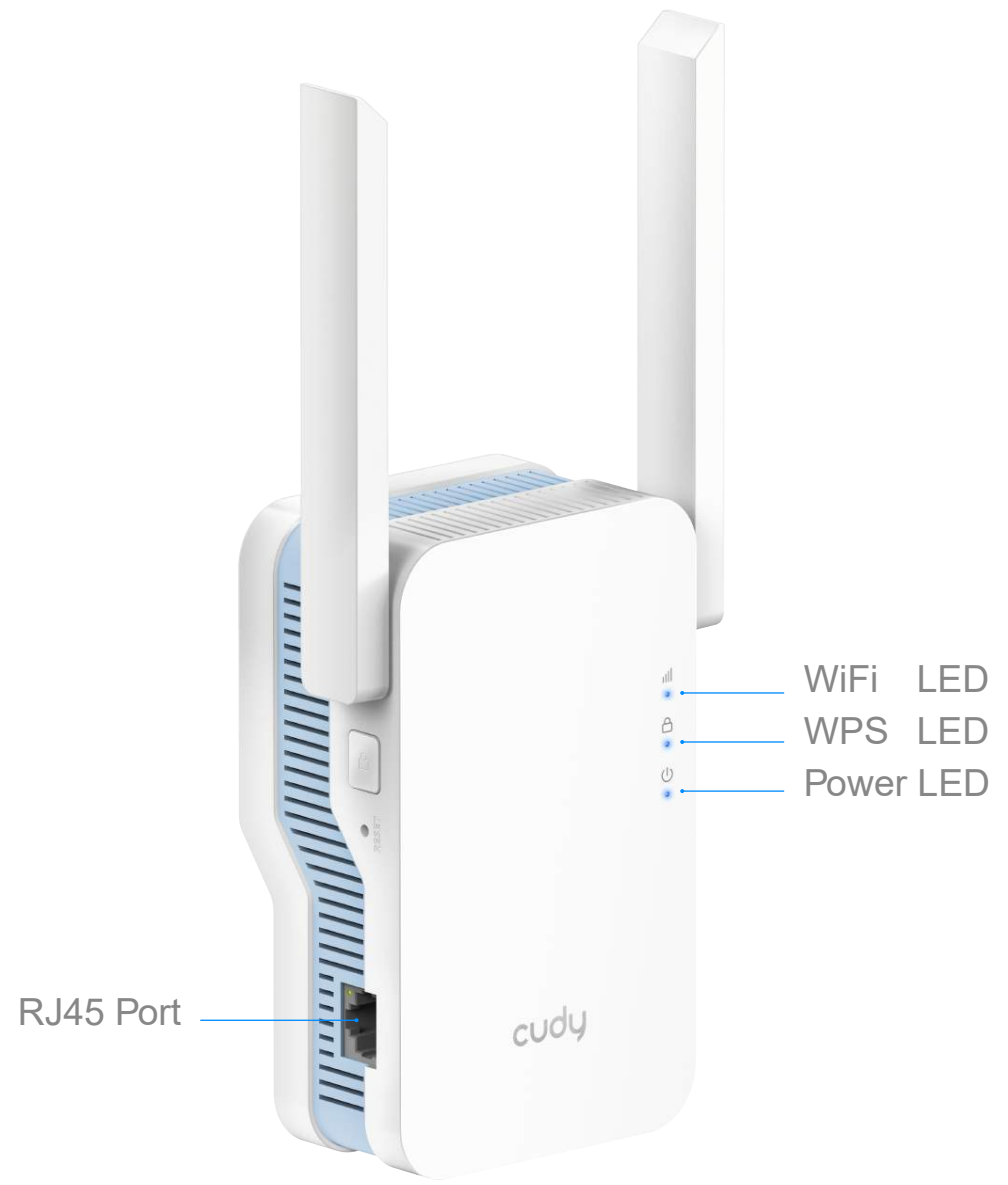

Enjoy Cudy Whole Home Mesh Wi-Fi System

- 4K 5GHz 867Mbps
- 2.4GHz 300Mbps

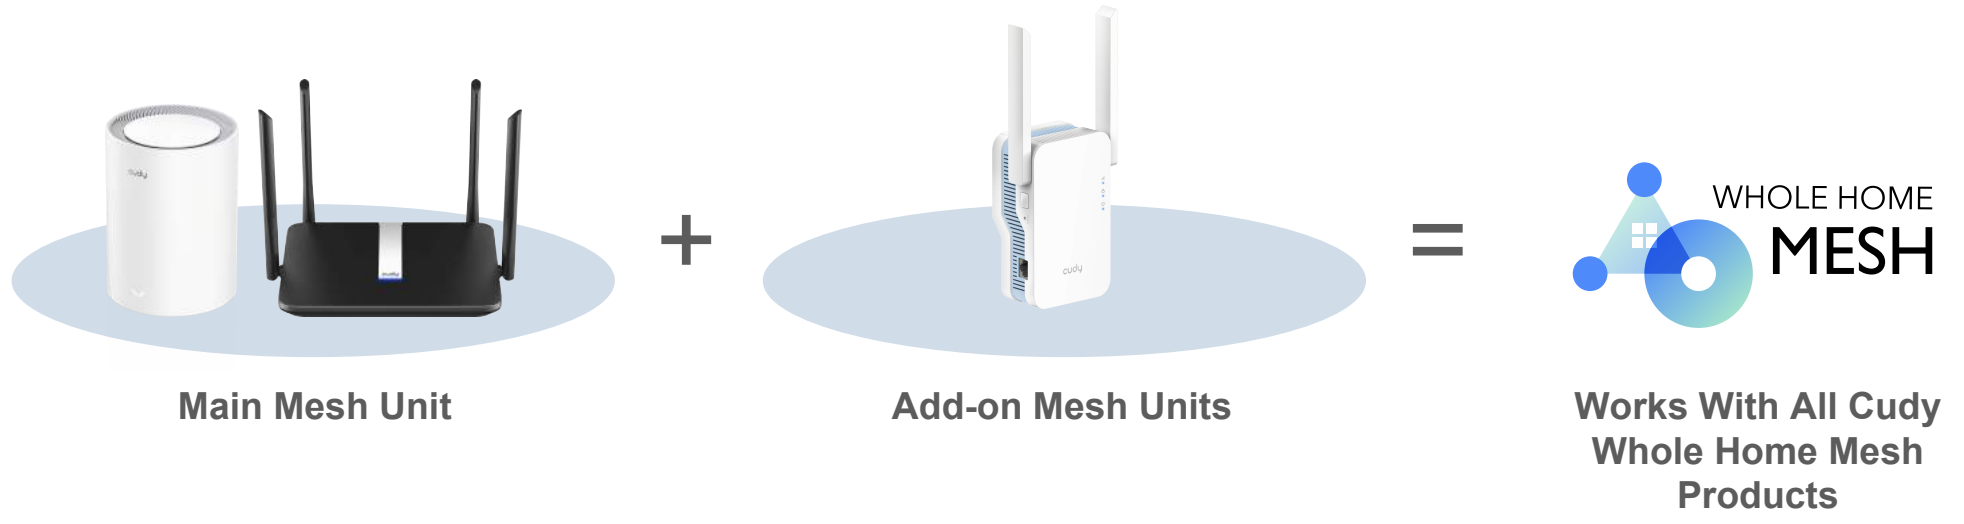



Specifications

Product Name	1200Mbps Wi-Fi Range Extender
Product Model	RE1200
Standards and Protocols	IEEE 802.11ac/n/g/a/b
Frequency	2.4GHz & 5GHz
Signal Rate	5GHz: Up to 867Mbps 2.4GHz: Up to 300Mpbs
Wireless Security	WPA-PSK/WPA2-PSK, OPEN
Reception Sensitivity	5GHz: 11a 6Mbps: -96dBm@10% PER 11a 54Mbps: -77dBm@10% PER 11ac HT20 mcs8: -72dBm@10% PER 11ac HT40 mcs9: -67dBm@10% PER 11ac HT80 mcs9: -62dBm@10% PER 2.4GHz: 11g 54M: -78dBm@10% PER 11n HT20 mcs7: -76dBm@10% PER 11n HT40 mcs7: -73dBm@10% PER
Ports	1 10/100Mbps self-adaptive LAN
Power	Direct plug-in power supply (110V-240V)
Antenna	2 x 5dBi Antennas
Environment	Operating Temperature: 0°C~50°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

Datasheet AC1200 Dual Band Range Extender | RE 1200

Distribuito da:

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: tecnico@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.

The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.

La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.



Distributed by ELCART

LED and Button

LED	Colour	Status	Indication
	/	OFF	No power
	Blue	Flash	The system is booting or upgrading
		ON	System startup is complete
	/	OFF	Not connected to host Wi-Fi
	Blue	Flash	WPS in progress
		ON	Connected to host Wi-Fi
	OFF	Flash	No host Wi-Fi configuration
	Red Flash	ON	Not connected to host Wi-Fi
	Solid Red	ON	Connected to host Wi-Fi, signal is weak
	Solid Purple	ON	Connected to host Wi-Fi, signal is fair
	Solid Blue	ON	Connected to host Wi-Fi, signal is good
Reset	Long press for 2 seconds		Press and hold Reset button for 2 seconds until all the LED lights turn on and off.
WPS	Press to take effect		Press the WPS button until WPS LED start flashing.



Informazione agli utenti ex art. 26 D.Lgs. 49/2014

Il simbolo riportato sull'apparecchiatura (Allegato IX D.Lgs. 49/2014) indica che il rifiuto deve essere oggetto di "raccolta separata" e che è stato immesso sul mercato, in Italia, dopo il 31/12/2010.

Pertanto, l'utente dovrà conferire (o far conferire) il rifiuto ai centri di raccolta differenziata predisposti dalle amministrazioni locali, oppure consegnarlo al rivenditore contro acquisto di una nuova apparecchiatura di tipo equivalente.

L'utente ha dunque un ruolo attivo: la raccolta differenziata del rifiuto e le successive operazioni di trattamento, recupero e smaltimento favoriscono la produzione di apparecchiature con materiali riciclati e limitano gli effetti negativi sull'ambiente e sulla salute eventualmente causati da una gestione impropria del rifiuto.

Nel caso di RAEE di piccolissime dimensioni (<25 cm), l'utente ha diritto al conferimento gratuito, senza obbligo di contestuale acquisto, ai distributori al dettaglio la cui superficie di vendita specializzata eccede i 400 mq.



Made in China