




L03F (fisso - fixed)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L03F/WCM/3K07/_	W	650	596	7	9	3000K	25°
L03F/WCM/4K07/_		700	642	7	9	4000K	25°
L03F/WCF/3K07/_		650	551	7	9	3000K	40°
L03F/WCF/4K07/_	B	700	593	7	9	4000K	40°
L03F/BCM/3K07/_		650	596	7	9	3000K	25°
L03F/BCM/4K07/_		700	642	7	9	4000K	25°
L03F/BCF/3K07/_		650	551	7	9	3000K	40°
L03F/BCF/4K07/_		700	593	7	9	4000K	40°

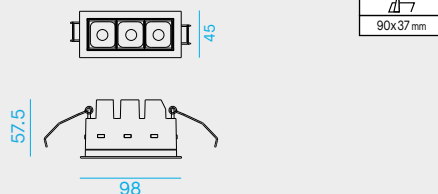

Incasso a LED per installazione a soffitto. Versione fissa.

LED OSRAM CRI>90

Lifetime 50.000h (L70B10).

Corpo in alluminio.
Cornice bianco o nera.

Riflettori in policarbonato in 4 finiture diverse:
B= nero
M= argento opaco
W= bianco
G= oro

Alimentatore 220-240V - 50/60Hz incluso.

Recessed LED fitting for false ceiling installation. Fixed version.

OSRAM LED CRI>90

Lifetime 50.000h (L70B10).

Body in aluminium. White or black frame.

Polycarbonate reflector in 4 different finishing:
B= black
M= silver mat
W= white
G= gold

220-240V - 50/60Hz power supply included.

Appareil à encastrer LED pour installation dans faux-plafond. Version fixe.

LED OSRAM IRC>90

Durée de vie 50.000h (L70B10).

Corps en aluminium. Cadre blanc ou noir.

Réflecteur en polycarbonate en 3 finitions différentes :
B= noir
M= argent mat
W= blanc
G= or

Alimentation 220-240V - 50/60Hz incluse.

LED-Einbau für Deckeninstallation in 3 Massen.



LED OSRAM CRI>90

Lebensdauer 50.000h (L70B10).

Körper Aluminium. Weißer oder schwarzer Rahmen

Polycarbonat Reflektor in 4 verschiedenen Ausführungen:
B= Schwarz
M= Silber matt
W= Weiss
G= Gold

Netzgerät 220-240V - 50/60Hz enthalten.

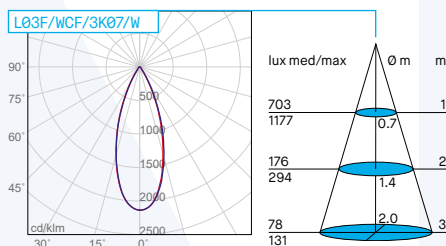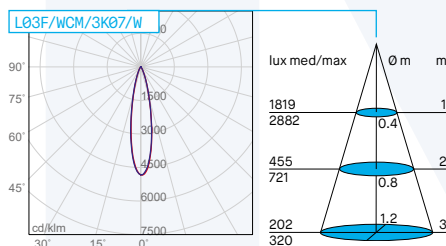

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Description
L03F/_/_/_/_/_1	ON-OFF Made in Italy
L03F/_/_/_/_/_2	PUSH/DIM 1-10V Made in Italy
L03F/_/_/_/_/_3	DALI Made in Italy
L03F/_/_/_/_/_6	ON-OFF
L03F/_/_/_/_/_9	Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included)
L03F/_/_/_/_/_10	Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android)
L03F/_/_/_/_/_11	Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)
Gestione della luce / Light management, see cat.42	

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah