

# Base for read/write station U-P6-B5

- INTERBUS-remote bus subscriber
- 2 PG screw fittings for IN and OUT supply 2 EMV PG screw fittings for BUS IN and OUT
- Complete read/write functionality via the INTERBUS
- Transfer of 10 bytes of data in one cycle
- DIP switch for ring termination
- Field device with degree of protection IP67


#### Base for INTERBUS



### **Function**

The base is used in combination with an upper part, the IPT\*-FP read/write station.
The device is operated as a slave on the INTERBUS remote bus. The device makes available the complete read/write functionality. Up to 10 bytes are transmitted per cycle.
The continuing bus is activated via DIP switch.


#### **Dimensions**

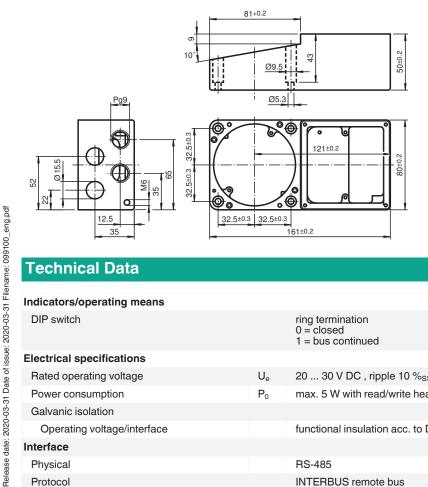


### **Technical Data**

	ring termination 0 = closed 1 = bus continued
$U_{\rm e}$	20 30 V DC , ripple 10 % <sub>SS</sub> , PELV
$P_0$	max. 5 W with read/write head IPT*-FP
	functional insulation acc. to DIN EN 50178, rated insulation voltage 50 $\mathrm{V}_{\mathrm{eff}}$
	RS-485
	INTERBUS remote bus
	Ü

### Connection



### **Assembly**

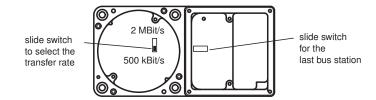

## **Matching system components**

