




00175555614054

Altivar EMC Input Filter

VW3A4401 ... 407, 409

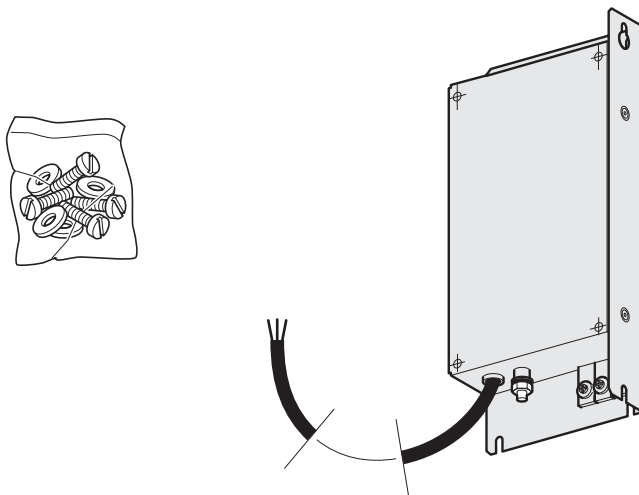

DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Only appropriately trained persons who are familiar with and fully understand the contents of the present manual and all other pertinent product documentation and who have received all necessary training to recognize and avoid hazards involved are authorized to work on and with this equipment.
- Installation, adjustment, repair, and maintenance must be performed by qualified personnel.
- Verify compliance with all local and national electrical code requirements as well as all other applicable regulations with respect to grounding of all equipment.
- Before performing work and/or applying voltage on the equipment, follow the instructions given in the appropriate installation manual.

Failure to follow these instructions will result in death or serious injury.

CAUTION

SHARP EDGES



Use all necessary personal protective equipment (PPE) such as gloves when performing any type of work whatsoever on or with this product.

Failure to follow these instructions can result in injury or equipment damage.

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this product.
© 2025 Schneider Electric. All Rights Reserved.

VW3A4401	12 A	ATV●1H037M3, ATV●1H075M3, ATV●1HU15M3 ATV61H075N4, ATV61HU15N4, ATV61HU22N4 ATV71H075N4, ATV71HU15N4, ATV71HU22N4
VW3A4402	26 A	ATV●1HU22M3, ATV●1HU30M3, ATV●1HU40M3 ATV61HU30N4, ATV61HU40N4 ATV71●U30N4●, ATV71●U40N4●
VW3A4403	35 A	ATV●1HU55M3, ATV61HU55N4, ATV61HU75N4 ATV71●U55N4●, ATV71●U75N4●
VW3A4404	46 A	ATV●1HU75M3, ATV61HD11N4 ATV71●D11N4
VW3A4405	72 A	ATV61HD11M3X, ATV61HD15M3X ATV61HD15N4, ATV61HD18N4 ATV71HD11M3X, ATV71HD15M3X ATV71●D15N4, ATV71●D18N4
VW3A4406	90 A	ATV21HD22N4, ATV21HD30N4, ATV21HD22M3X ATV212HD22N4, ATV212HD30N4, ATV212HD22M3X ATV61HD18M3X, ATV61HD22M3X, ATV61HD22N4 ATV71HD18M3X, ATV71HD22M3X, ATV71●D22N4
VW3A4407	92 A	ATV21HD37N4, ATV21HD45N4 ATV212HD37N4, ATV212HD45N4 ATV61HD30N4, ATV61HD37N4 ATV71●D30N4, ATV71●D37N4
VW3A4409	48 A	ATV61HD15N4 ATV71●D15N4




MANUFACTURER
Schneider Electric Industries SAS
 35 rue Joseph Monier
 Rueil Malmaison 92500 France

UK REPRESENTATIVE
Schneider Electric Limited
 Stafford Park 5
 Telford, TF3 3BL United Kingdom



Опция для продуктов Altivar и Altistart.
 Пожалуйста, обратитесь к сообщению о
 преобразователе частоты EAC /
 программном сартере в приложении к
 началу работы, размещенном на веб-сайте
 производителя.
 Авторизованный поставщик в Республике Казахстан:
 ТОО «Шнейдер Электрик»
 Адрес: 050010, РК, г. Алматы, пр. Достык, 38,
 бизнес-центр «Кен Дала», 5 этаж, левое крыло.
 Тел.: +7 (727) 339 23 57
 Номер службы поддержки клиентов:
 Тел.: +7 (727) 339 24 52


Altivar және Altistart өніміне арналған опция.
 Өндірушінің веб-сайтында орналастырылған
 «Жұмысқа кірісу» қосымшасындағы EAC жиілік инвертер
 / бірқалыпты іске қосу құрылғысы хабарламасына
 сілтеме жасауыңызды сұраймыз.
 Қазақстан Республикасындағы уәкілетті жеткізуші:
 ЖШС «Шнейдер Электрик»
 Мекен-жайы: 050010, ҚР, Алматы қаласы, Достық
 даңғылы, 38, «Кең дала» бизнес орталығы, 5-қабат, сол
 қанат.
 тел.: +7 (727) 339 23 57
 Клиенттерге қызмет көрсету нөмірі:
 тел.: +7 (727) 339 24 52

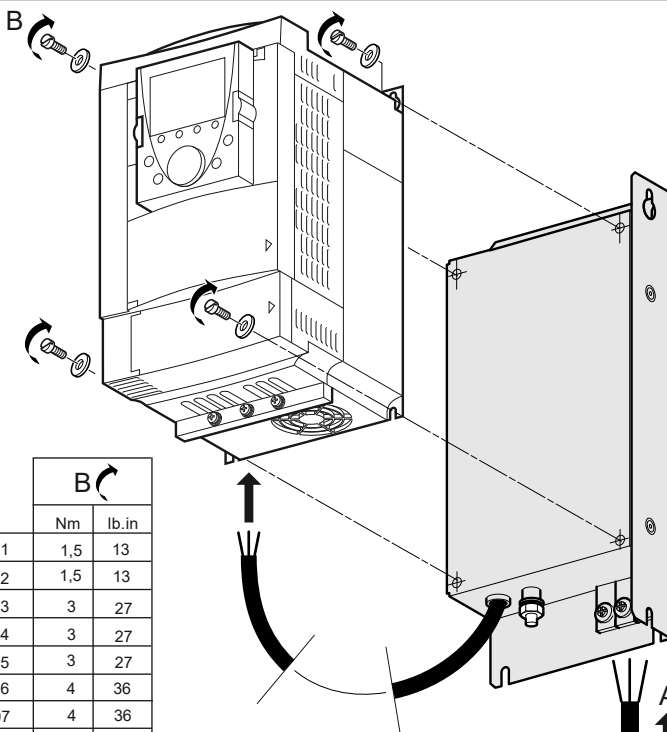

B ↺


	Nm	lb.in
VW3A4401	1,5	13
VW3A4402	1,5	13
VW3A4403	3	27
VW3A4404	3	27
VW3A4405	3	27
VW3A4406	4	36
VW3A4407	4	36
VW3A4409	3	27

	A ↻	
	Nm	lb.in
VW3A4401	0,6	5.3
VW3A4402	1,5	13.3
VW3A4403	1,5	13.3
VW3A4404	2	17.7
VW3A4405	6	53
VW3A4406	6	53
VW3A4407	6	53
VW3A4409	4	35.4

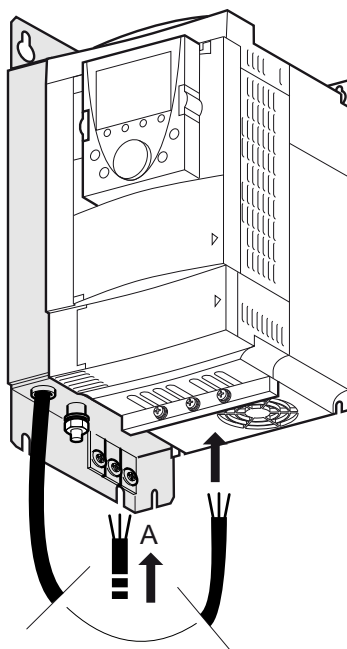


A ↻


VW3A4405, VW3A4409



VW3A4401 ... 404



	a		b		c		G		H1		H2		Ø	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
VW3A4401	130	5.12	290	11.42	40	1.57	105	4.13	275	10.83	-	-	4,5	0.18
VW3A4402	155	6.10	324	12.76	50	1.97	130	5.12	309	12.17	-	-	4,5	0.18
VW3A4403	175	6.89	370	14.57	60	2.36	150	5.91	355	13.98	-	-	6,5	0.25
VW3A4404	210	8.27	380	14.96	60	2.36	190	7.48	365	14.37	-	-	6,5	0.25
VW3A4405	230	9.06	498,5	19.63	62	2.44	190	7.48	479	18.86	460	18.11	6,5	0.25
VW3A4409	230	9.06	498,5	19.63	62	2.44	190	7.48	479	18.86	460	18.11	6,5	0.25

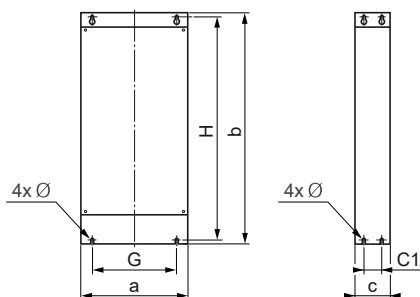

	a		b		c		C1		G		H		Ø	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
VW3A4406	240	9.45	522	20.53	79	3.11	40	1.57	200	7.87	502,5	19.78	9,0	0.35
VW3A4407	240	9.45	650	25.59	79	3.11	40	1.57	200	7.87	631	24.84	9,0	0.35

