

Product Environmental Profile

Modicon X80 Power Supply






General information

Reference product	Modicon X80 Power Supply - BMXCPS4002
Description of the product	The Modicon X80 Power Supply is a critical component designed to supply reliable and efficient electrical power to the Modicon X80 backplane and the modules installed on it. It provides advanced diagnostics such as current load, temperatures, remaining life time, and undervoltage thresholds.
Description of the range	The products of the range are: The Modicon X80 I/O platform serves as a common platform for Modicon M340, Modicon Quantum Ethernet I/O, Modicon M580 PACs, and future Modicon Mx80 controllers. The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To provide power to a Modicon X80 controller during 10 years and at 90% use rate, in accordance with relevant safety and performance standards.
Specifications are:	Primary voltage of 100V to 240V AC, Secondary voltage of 5.5A at 3.3V DC, Secondary power of 40W at 24V DC, Maximum power dissipation of 8.5W. 2-pin connector for alarm relay, 5-pin connector for line supply, protective earth for electrical connection. This product is certified by CE, RCM, Merchant Navy, CSA, EAC, UL. It meets EN 61131-2, EN 61000-6-4, EN 61000-6-2 and EN 61010-2-201 standards. IP20



Constituent materials

Reference product mass	664 g	including the product, its packaging and additional elements and accessories
------------------------	-------	--

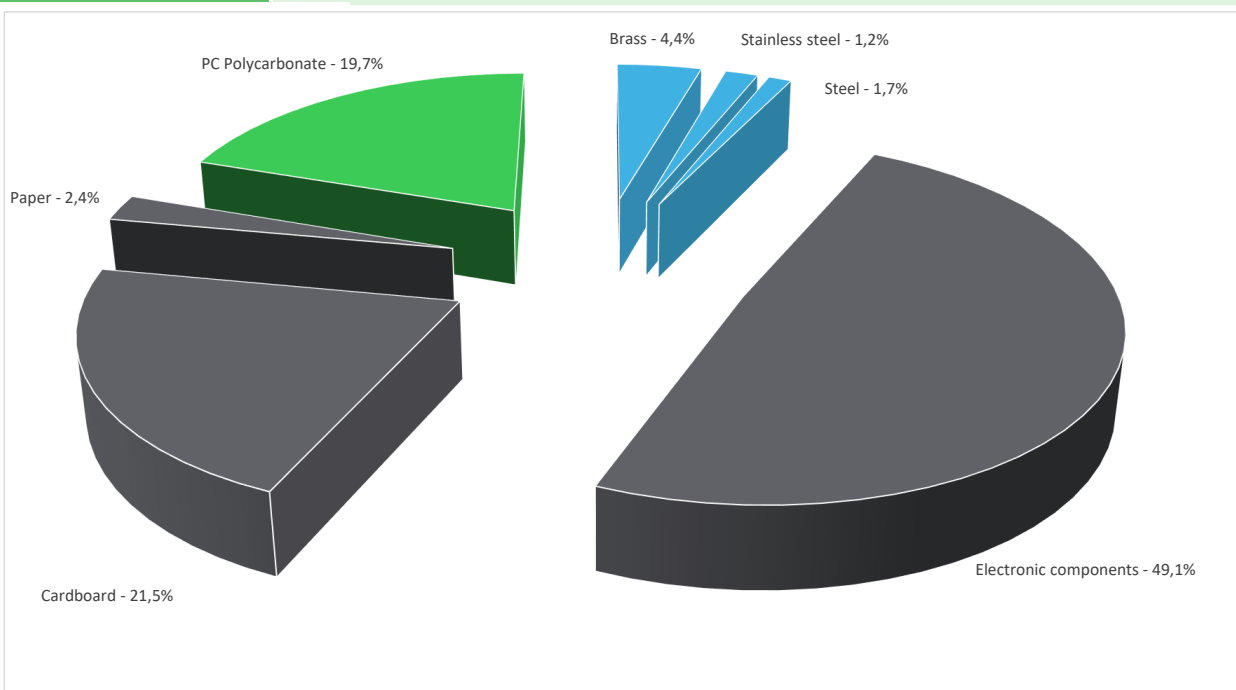

Plastics	19,70%
Metals	7,30%
Others	73,00%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



Additional environmental information

End Of Life	Recyclability potential:	9%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	----	---



Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	The product does not require any installation operation			
Use scenario	The product is in active mode 90% of the time and 10% in off mode, with a power use of 8,5W during 10 years.			
Time representativeness	The collected data are representative of the year 2023			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Rest of the World			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2018; Indonesia, ID	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; High voltage; 2018; Europe, EU-27 Electricity Mix; High voltage; 2018; India, IN Electricity Mix; High voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; High voltage; 2018; Europe, EU-27 Electricity Mix; High voltage; 2018; India, IN Electricity Mix; High voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; High voltage; 2018; Europe, EU-27 Electricity Mix; High voltage; 2018; India, IN Electricity Mix; High voltage; 2018; China, CN

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		Modicon X80 Power Supply - BMXCPS4002						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	4,96E+02	2,65E+01	9,83E-01	0*	4,67E+02	1,50E+00	2,59E-01
Contribution to climate change-fossil	kg CO2 eq	4,96E+02	2,65E+01	9,83E-01	0*	4,67E+02	1,50E+00	2,22E-01
Contribution to climate change-biogenic	kg CO2 eq	3,24E-01	5,69E-02	0*	2,04E-04	2,67E-01	0*	3,66E-02
Contribution to climate change-land use and land use change	kg CO2 eq	1,68E-04	1,68E-04	0*	0*	0*	0*	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	6,74E-06	3,50E-06	8,63E-07	0*	2,37E-06	1,10E-09	2,97E-08
Contribution to acidification	mol H+ eq	3,29E+00	1,87E-01	4,04E-03	0*	3,10E+00	1,38E-03	4,40E-03
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	5,27E-04	8,18E-05	1,15E-07	0*	4,37E-04	7,47E-06	3,35E-06
Contribution to eutrophication marine	kg N eq	3,65E-01	2,08E-02	1,84E-03	3,78E-05	3,42E-01	5,51E-04	3,72E-04
Contribution to eutrophication, terrestrial	mol N eq	4,35E+00	2,22E-01	1,99E-02	0*	4,10E+00	5,68E-03	3,35E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	1,22E+00	7,44E-02	6,64E-03	0*	1,13E+00	1,48E-03	1,11E-03
Contribution to resource use, minerals and metals	kg Sb eq	2,97E-03	2,96E-03	0*	0*	1,29E-05	0*	8,56E-06
Contribution to resource use, fossils	MJ	9,21E+03	3,56E+02	1,22E+01	0*	8,83E+03	1,13E+01	2,72E+00
Contribution to water use	m3 eq	2,54E+01	6,34E+00	4,96E-02	1,41E-02	1,89E+01	9,17E-02	1,32E-01

Inventory flows Indicators		Modicon X80 Power Supply - BMXCPS4002						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,02E+03	1,07E+01	0*	0*	1,01E+03	0*	-4,96E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	5,37E-01	5,37E-01	0*	0*	0*	0*	2,73E+00
Contribution to total use of renewable primary energy resources	MJ	1,02E+03	1,12E+01	0*	0*	1,01E+03	0*	2,23E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9,20E+03	3,48E+02	1,22E+01	0*	8,83E+03	1,13E+01	2,72E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	7,91E+00	7,91E+00	0*	0*	0*	0*	0,00E+00
Contribution to total use of non-renewable primary energy resources	MJ	9,21E+03	3,56E+02	1,22E+01	0*	8,83E+03	1,13E+01	2,72E+00
Contribution to use of secondary material	kg	2,10E-01	2,10E-01	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m³	5,93E-01	1,50E-01	1,16E-03	3,28E-04	4,40E-01	2,14E-03	3,08E-03
Contribution to hazardous waste disposed	kg	6,10E+01	4,87E+01	0*	0*	1,19E+01	3,15E-01	6,10E-01
Contribution to non hazardous waste disposed	kg	8,16E+01	5,74E+00	0*	1,54E-01	7,56E+01	1,40E-01	5,15E-02
Contribution to radioactive waste disposed	kg	1,19E-02	4,05E-03	1,94E-04	0*	7,62E-03	7,31E-06	2,77E-05
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	5,28E-02	6,90E-03	0*	0*	0*	4,59E-02	0,00E+00
Contribution to materials for energy recovery	kg	2,14E-09	2,14E-09	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	5,34E-04	7,95E-05	0*	0*	0*	4,55E-04	0,00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0,00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 4,45E-02

Mandatory Indicators		Modicon X80 Power Supply - BMXCPS4002							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	4,67E+02	0*	0*	0*	0*	0*	4,67E+02	0*
Contribution to climate change-fossil	kg CO2 eq	4,67E+02	0*	0*	0*	0*	0*	4,67E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	2,67E-01	0*	0*	0*	0*	0*	2,67E-01	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	2,37E-06	0*	0*	0*	0*	0*	2,37E-06	0*
Contribution to acidification	mol H+ eq	3,10E+00	0*	0*	0*	0*	0*	3,10E+00	0*
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	4,37E-04	0*	0*	0*	0*	0*	4,37E-04	0*
Contribution to eutrophication marine	kg N eq	3,42E-01	0*	0*	0*	0*	0*	3,42E-01	0*
Contribution to eutrophication, terrestrial	mol N eq	4,10E+00	0*	0*	0*	0*	0*	4,10E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	1,13E+00	0*	0*	0*	0*	0*	1,13E+00	0*
Contribution to resource use, minerals and metals	kg Sb eq	1,29E-05	0*	0*	0*	0*	0*	1,29E-05	0*
Contribution to resource use, fossils	MJ	8,83E+03	0*	0*	0*	0*	0*	8,83E+03	0*
Contribution to water use	m3 eq	1,89E+01	0*	0*	0*	0*	0*	1,89E+01	0*

Inventory flows Indicators		Modicon X80 Power Supply - BMXCPS4002							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,01E+03	0*	0*	0*	0*	0*	1,01E+03	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	1,01E+03	0*	0*	0*	0*	0*	1,01E+03	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	8,83E+03	0*	0*	0*	0*	0*	8,83E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	8,83E+03	0*	0*	0*	0*	0*	8,83E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	4,40E-01	0*	0*	0*	0*	0*	4,40E-01	0*
Contribution to hazardous waste disposed	kg	1,19E+01	0*	0*	0*	0*	0*	1,19E+01	0*
Contribution to non hazardous waste disposed	kg	7,56E+01	0*	0*	0*	0*	0*	7,56E+01	0*
Contribution to radioactive waste disposed	kg	7,62E-03	0*	0*	0*	0*	0*	7,62E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2410045-V1	Drafting rules	PCR-4-ed4-EN-2021 09 06
Date of issue	12-2024	Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"			

Schneider Electric Industries SAS

Country Customer Care Center
http://www.se.com/contact

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVPEP2410045-V1

Published by Schneider Electric
©2024 - Schneider Electric – All rights reserved

12-2024

