Product Environmental Profile

TeSys LRF - electronic thermal overload relay - 200...330 A - class 10

TeSys F/TeSys Deca electronic thermal overload relay







General information


Reference product	TeSys LRF - electronic thermal overload relay - 200330 A - class 10 - LR9F7375
Description of the product	The main purpose of the thermal overload relays is to detect overload currents in order to protect the motor.
Description of the range	The products of the range are: Electronic thermal overload relay, TeSys F/TeSys Deca, the representative product used for analysis is 200-330A (product number: LR9F7375) The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	The functional unit of the LR9F7375 is to detect overload currents in order to protect the load for 20 years.
Specifications are:	Standardized product characteristics to provide: rated insulation voltage: 1000V AC conventional free air thermal current: 5A rated operational voltage: 1000V AC rated impulse withstand voltage: 8KV thermal protection adjustment range:200-330A thermal overload class: Class 10

129

Constituent materials

Reference product mass

1836 g including the product, its packaging and additional elements and accessories

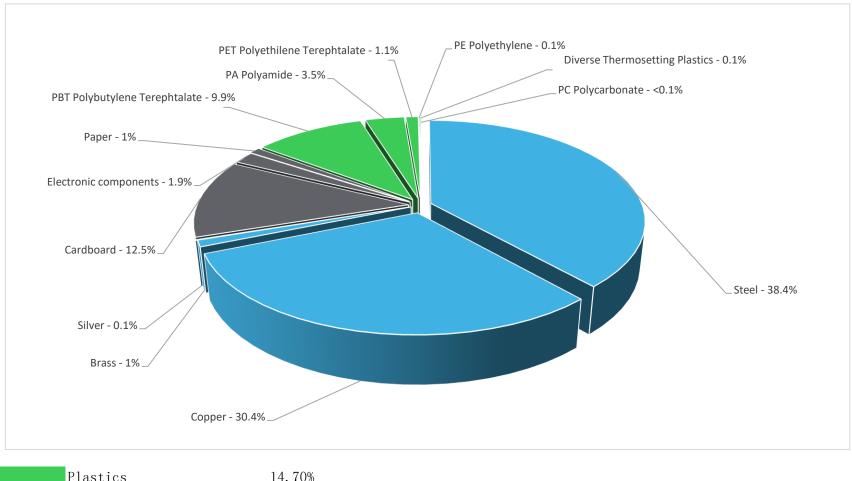

Plastics 14.70%
Metals 69.90%
Others 15.40%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(I) Additional environmental information

End Of Life

Recyclability potential:

92%

The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.

Environmental impacts

Reference service life time	20 years										
Product category	Other equipments - Passive product - non-continuous operation										
Installation elements	Ref LR9F7375 does not require any installation	Ref LR9F7375 does not require any installation operations.									
Use scenario	Other equipments - Passive product - non-contin	Other equipments - Passive product - non-continuous operation									
Time representativeness	The collected data are representative of the yea	r 2023									
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.										
Geographical representativeness	Rest of the World										
	[A1 - A3] [A5] [B6] [C1 - C4]										
Energy model used	Electricity Mix; Low voltage; 2018; France, FR	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; China, CN							

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneiderelectric.com/contact

Mandatory Indicators	TeSys LRF - electronic thermal overload relay - 200330 A - class 10 - LR9F7375								
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to climate change	kg CO2 eq	3.55E+02	8.92E+00	1.22E+00	2.34E-01	3.41E+02	3.40E+00	0.00E+00	
Contribution to climate change-fossil	kg CO2 eq	3.54E+02	8.71E+00	1.22E+00	2.23E-01	3.41E+02	3.28E+00	0.00E+00	
Contribution to climate change-biogenic	kg CO2 eq	3.80E-01	2.08E-01	0*	1.11E-02	4.89E-02	1.12E-01	0.00E+00	
Contribution to climate change-land use and land use change	kg CO2 eq	3.17E-06	2.61E-07	0*	0*	0*	2.91E-06	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	4.36E-06	1.27E-06	1.08E-06	3.03E-09	1.95E-06	6.63E-08	0.00E+00	
Contribution to acidification	mol H+ eq	2.72E+00	1.41E-01	5.37E-03	6.83E-04	2.55E+00	2.09E-02	0.00E+00	
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	3.97E-03	3.67E-04	0*	5.35E-06	7.20E-05	3.52E-03	0.00E+00	
Contribution to eutrophication marine	kg N eq	2.88E-01	9.74E-03	2.47E-03	2.97E-04	2.73E-01	3.16E-03	0.00E+00	
Contribution to eutrophication, terrestrial	mol N eq	3.26E+00	1.08E-01	2.68E-02	2.07E-03	3.09E+00	3.85E-02	0.00E+00	
Contribution to photochemical ozone formation - human health	kg COVNM eq	9.73E-01	4.13E-02	8.75E-03	4.74E-04	9.11E-01	1.08E-02	0.00E+00	
Contribution to resource use, minerals and metals	kg Sb eq	2.61E-03	2.49E-03	0*	0*	4.37E-06	1.12E-04	0.00E+00	
Contribution to resource use, fossils	MJ	5.87E+03	1.84E+02	1.52E+01	2.31E+00	5.51E+03	1.54E+02	0.00E+00	
Contribution to water use	m3 eq	2.49E+01	5.85E+00	6.20E-02	1.80E-02	1.50E+01	3.93E+00	0.00E+00	

Inventory flows Indicators TeSys LRF - electronic thermal overload relay - 200330 A - class 1								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.91E+02	4.71E+00	0*	3.03E-01	5.83E+02	2.74E+00	0.00E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	6.10E+00	6.10E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of renewable primary energy resources	MJ	5.97E+02	1.08E+01	0*	3.03E-01	5.83E+02	2.74E+00	0.00E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.86E+03	1.75E+02	1.52E+01	2.31E+00	5.51E+03	1.54E+02	0.00E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	8.75E+00	8.75E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	5.87E+03	1.84E+02	1.52E+01	2.31E+00	5.51E+03	1.54E+02	0.00E+00
Contribution to use of secondary material	kg	9.13E-02	9.13E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	5.80E-01	1.36E-01	1.44E-03	4.20E-04	3.50E-01	9.18E-02	0.00E+00
Contribution to hazardous waste disposed	kg	1.48E+02	1.37E+02	0*	0*	1.03E+01	3.50E-02	0.00E+00
Contribution to non hazardous waste disposed	kg	6.50E+01	5.38E+00	0*	9.99E-02	5.94E+01	1.48E-01	0.00E+00
Contribution to radioactive waste disposed	kg	6.44E-03	3.73E-03	2.43E-04	1.24E-05	2.43E-03	2.62E-05	0.00E+00
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.50E+00	1.13E-01	0*	0*	0*	1.39E+00	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	2.25E-02	1.15E-03	0*	9.54E-03	0*	1.19E-02	0.00E+00

 $^{^{\}star}$ represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 6.12E-02

Mandatory Indicators		,	eSys LR	F - electronic	thermal o	verload	relay - 20	0330 A - clas	s 10 - LR9F7375
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	3.41E+02	0*	0*	0*	0*	0*	3.41E+02	0*
Contribution to climate change-fossil	kg CO2 eq	3.41E+02	0*	0*	0*	0*	0*	3.41E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	4.89E-02	0*	0*	0*	0*	0*	4.89E-02	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1.95E-06	0*	0*	0*	0*	0*	1.95E-06	0*
Contribution to acidification	mol H+ eq	2.55E+00	0*	0*	0*	0*	0*	2.55E+00	0*
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	7.20E-05	0*	0*	0*	0*	0*	7.20E-05	0*
Contribution to eutrophication marine	kg N eq	2.73E-01	0*	0*	0*	0*	0*	2.73E-01	0*
Contribution to eutrophication, terrestrial	mol N eq	3.09E+00	0*	0*	0*	0*	0*	3.09E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	9.11E-01	0*	0*	0*	0*	0*	9.11E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	4.37E-06	0*	0*	0*	0*	0*	4.37E-06	0*
Contribution to resource use, fossils	MJ	5.51E+03	0*	0*	0*	0*	0*	5.51E+03	0*
Contribution to water use	m3 eq	1.50E+01	0*	0*	0*	0*	0*	1.50E+01	0*

Inventory flows Indicators	,	eSys LF	RF - electronic	thermal o	verload	relay - 20	00330 A - clas	s 10 - LR9F737	
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.83E+02	0*	0*	0*	0*	0*	5.83E+02	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	5.83E+02	0*	0*	0*	0*	0*	5.83E+02	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.51E+03	0*	0*	0*	0*	0*	5.51E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	5.51E+03	0*	0*	0*	0*	0*	5.51E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	3.50E-01	0*	0*	0*	0*	0*	3.50E-01	0*
Contribution to hazardous waste disposed	kg	1.03E+01	0*	0*	0*	0*	0*	1.03E+01	0*
Contribution to non hazardous waste disposed	kg	5.94E+01	0*	0*	0*	0*	0*	5.94E+01	0*
Contribution to radioactive waste disposed	kg	2.43E-03	0*	0*	0*	0*	0*	2.43E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2212018_V4	Drafting rules	PCR-4-ed4-EN-2021 09 06					
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08					
Date of issue	11-2024	Information and reference documents	www.pep-ecopassport.org					
		Validity period	5 years					
Independent verification of the o	leclaration and data, in compliance with ISO 14021 : 2016							
Internal X	External							
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)								
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022								
The components of the present PEP may not be compared with components from any other program.								
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"								

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com ENVPEP2212018_V4 Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

11-2024