

Product Environmental Profile

PFXGP46 Series

Pro-face GP4000






General information

Reference product	PFXGP46 Series - PFXGP4601TADC
Description of the product	High connectivity with a wide range of industrial controllers
Description of the range	Pro-face Standard HMI
	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To provide 12.1" TFT Smart Display during 10 years and maximum use rate at 17W, based on below function: - 12.1-inch Touchscreen panel. - SD Card Interface - Serial communication interface (RS-422/485, RS-232C) - USB Interface (Type-A, mini-B) - Ethernet interface



Constituent materials

Reference product mass	3000 g including the product, its packaging and additional elements and accessories
------------------------	---

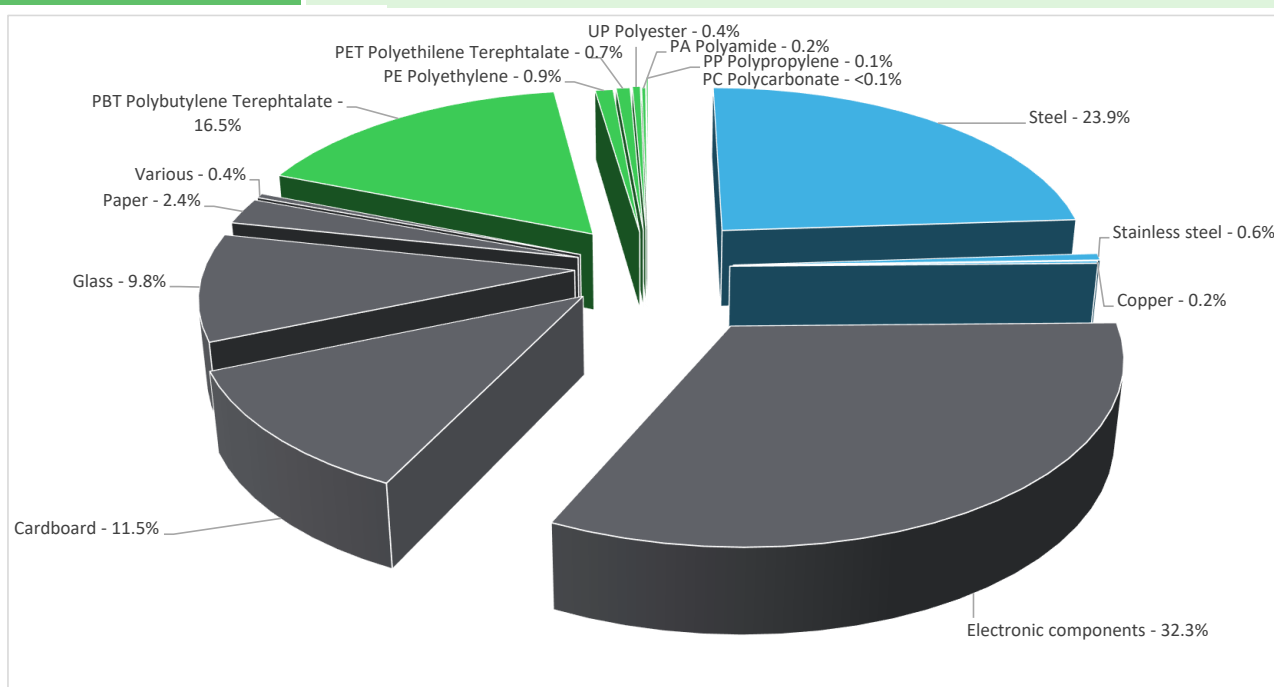

Plastics	18.80%
Metals	24.70%
Others	56.40%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<https://www.se.com/ww/en/work/support/green-premium/>



Additional environmental information

End Of Life	Recyclability potential:	26%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--



Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	cable, connectors, screws			
Use scenario	The product is in active mode 100% of the time a power use of 17W, for 10 years.			
Technological representativeness	High connectivity with a wide range of industrial controllers			
Geographical representativeness	Europe, US, Asia			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; ID	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			PFXGP46 Series - PFXGP4601TADC					
Impact indicators	Unit	Total	Manufacturing [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Loads and Benefits [D]
Contribution to climate change	kg CO2 eq	9.07E+02	2.05E+02	3.92E-01	7.37E-01	6.98E+02	3.13E+00	-3.69E+00
Contribution to climate change-fossil	kg CO2 eq	9.06E+02	2.04E+02	3.92E-01	7.04E-01	6.97E+02	3.13E+00	-3.66E+00
Contribution to climate change-biogenic	kg CO2 eq	8.80E-01	3.26E-01	0*	3.27E-02	5.20E-01	1.27E-03	-3.74E-02
Contribution to climate change-land use and land use change	kg CO2 eq	2.42E-06	2.40E-06	0*	0*	0*	2.13E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.08E-04	1.04E-04	0*	4.87E-08	3.66E-06	2.87E-08	-4.62E-07
Contribution to acidification	mol H+ eq	5.43E+00	1.08E+00	2.52E-03	2.93E-03	4.34E+00	8.31E-03	-2.15E-02
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	2.49E-03	3.44E-04	0*	5.31E-06	2.08E-03	5.30E-05	-1.33E-05
Contribution to eutrophication marine	kg N eq	7.37E-01	2.40E-01	1.19E-03	7.77E-04	4.93E-01	2.04E-03	-2.70E-03
Contribution to eutrophication, terrestrial	mol N eq	8.39E+00	2.56E+00	1.30E-02	5.88E-03	5.79E+00	1.89E-02	-2.78E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.55E+00	9.07E-01	3.28E-03	1.57E-03	1.63E+00	6.36E-03	-9.01E-03
Contribution to resource use, minerals and metals	kg Sb eq	1.64E-02	1.63E-02	0*	0*	3.27E-05	0*	-8.51E-04
Contribution to resource use, fossils	MJ	2.13E+04	2.65E+03	5.47E+00	7.67E+00	1.85E+04	1.49E+02	-7.04E+01
Contribution to water use	m3 eq	7.57E+01	4.63E+01	0*	3.14E-01	2.83E+01	8.15E-01	-1.74E+00

Additional indicators for the French regulation are available as well

Inventory flows Indicators			PFXGP46 Series - PFXGP4601TADC					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.98E+03	4.25E+01	0*	5.49E-01	1.94E+03	0*	3.84E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	7.87E+00	7.87E+00	0*	0*	0*	0*	-7.27E+00
Contribution to total use of renewable primary energy resources	MJ	1.99E+03	5.04E+01	0*	5.49E-01	1.94E+03	0*	-3.43E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.13E+04	2.63E+03	5.47E+00	7.67E+00	1.85E+04	1.49E+02	-7.04E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.40E+01	2.40E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	2.13E+04	2.65E+03	5.47E+00	7.67E+00	1.85E+04	1.49E+02	-7.04E+01
Contribution to use of secondary material	kg	2.59E-02	2.59E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.76E+00	1.08E+00	0*	7.31E-03	6.58E-01	1.90E-02	-4.05E-02
Contribution to hazardous waste disposed	kg	3.68E+02	3.47E+02	0*	0*	1.63E+01	4.11E+00	-6.72E+01
Contribution to non hazardous waste disposed	kg	1.45E+02	3.47E+01	0*	2.39E+00	1.08E+02	2.38E-02	-1.27E+01
Contribution to radioactive waste disposed	kg	4.68E-02	3.25E-02	9.79E-06	3.21E-04	1.40E-02	2.02E-05	-1.52E-03
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.11E+00	3.76E-03	0*	4.04E-01	0*	7.02E-01	0.00E+00
Contribution to materials for energy recovery	kg	1.33E-09	1.33E-09	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP120711EN_V2	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	0	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	2023/10/18	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal X External			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

0

Published by Schneider Electric
©2023 - Schneider Electric – All rights reserved

2023/10/18