


# Product Environmental Profile

## TV Socket outlet

**Representative of all types of RADIO/TV/SAT outlets, with or without the central plates and the range accessories**



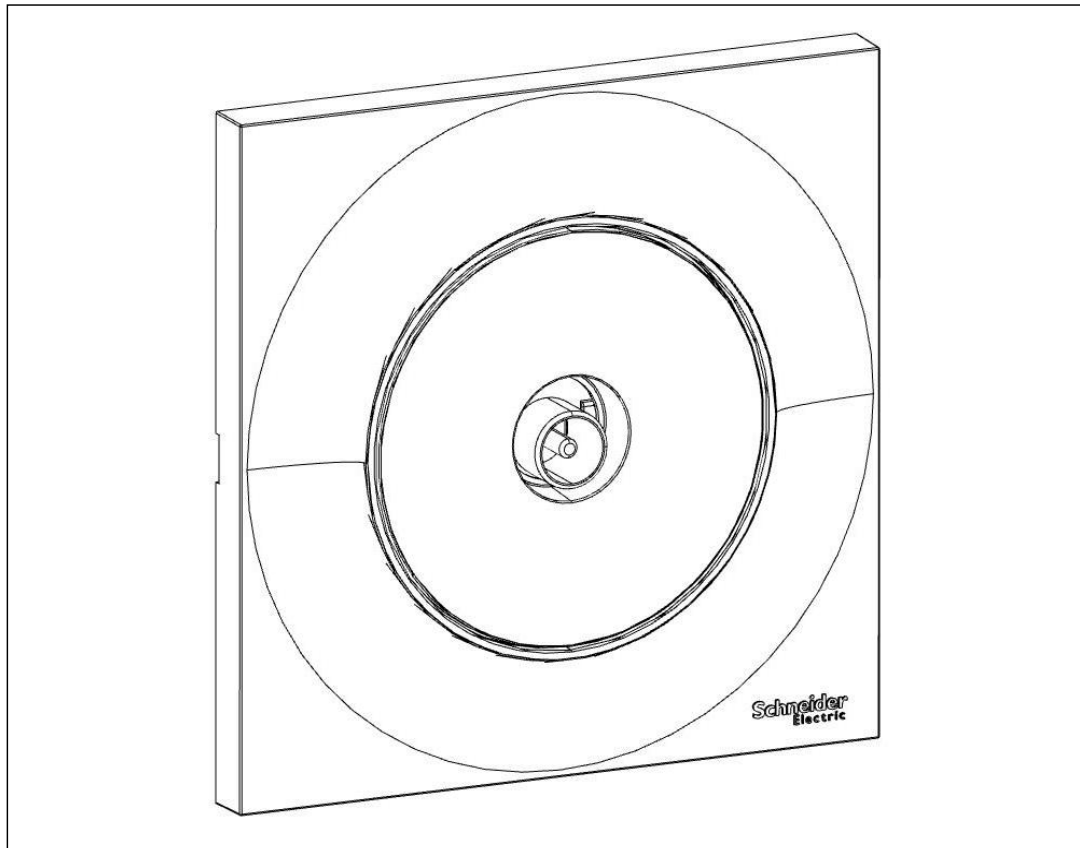


## General information

Reference product	TV Socket outlet - S520445+S520702
Description of the product	The main function of the product is to transmit the television, radio and satellite frequencies coming from the cable to the connected plug.
Description of the range	The products of the range are: Representative of all types of RADIO/TV/SAT outlets, with or without the central plates and the range accessories The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Protect, link by a connection point for 30 years (reference service life) with a 70% use rate for an application Residential/Tertiary/Industrial excluding LAN, while protecting against mechanical impacts (IK04) and the penetration of solid objects and liquids (IP21D), as defined in the table given in section 3.11.1.2  The type of electrical signal to enter in the Antenna outlet is: AC type and Frequency: 700-2400 MHz Extra Low voltage: max 5 Volts
Specifications are:	A: Connector X: 30 years Y: 70% Z: Residential/Tertiary/Industrial excluding LAN



## Constituent materials

Reference product mass	120 g	including the product, its packaging and additional elements and accessories
------------------------	-------	--

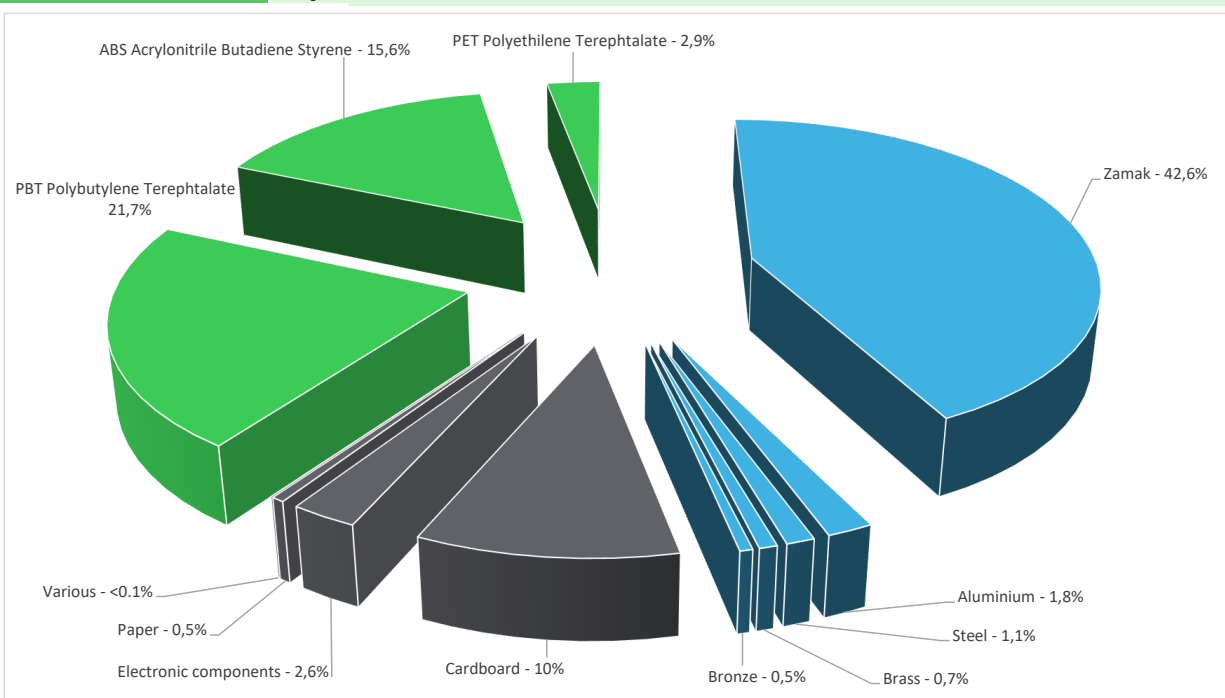

Plastics	40,2%
Metals	46,7%
Others	13,1%



## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information			
End Of Life	Recyclability potential:	57%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
Environmental impacts			
Reference service life time	30 years		
Product category	Copper telecom accessory - Residential/Tertiary/Industrial excluding LAN		
Installation elements	No special components needed		
Use scenario	Load rate = 0% Use rate = 70% RLT (30 years)		
Time representativeness	The collected data are representative of the year 2023		
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.		
Geographical representativeness	Europe		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Low voltage; 2018; Spain, ES	Electricity Mix; Low voltage; 2018; France, FR	Electricity Mix; Low voltage; 2018; France, FR
	[C1 - C4]		
	Electricity Mix; Low voltage; 2018; France, FR		

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		TV Socket outlet - S520445+S520702						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	9,15E-01	7,95E-01	2,34E-02	1,87E-02	0*	7,84E-02	-5,81E-02
Contribution to climate change-fossil	kg CO2 eq	9,03E-01	7,83E-01	2,34E-02	1,80E-02	0*	7,82E-02	-5,54E-02
Contribution to climate change-biogenic	kg CO2 eq	1,24E-02	1,15E-02	0*	7,33E-04	0*	1,88E-04	-2,65E-03
Contribution to climate change-land use and land use change	kg CO2 eq	2,46E-07	2,90E-09	0*	1,01E-07	0*	1,42E-07	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	1,39E-07	1,37E-07	3,58E-11	3,30E-10	0*	1,18E-09	-7,36E-09
Contribution to acidification	mol H+ eq	6,27E-03	5,93E-03	1,48E-04	4,75E-05	0*	1,42E-04	-3,37E-04
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	7,82E-06	6,65E-06	8,76E-09	3,82E-07	0*	7,76E-07	-3,65E-07
Contribution to eutrophication marine	kg N eq	9,44E-04	8,03E-04	6,94E-05	1,96E-05	0*	5,16E-05	-4,59E-05
Contribution to eutrophication, terrestrial	mol N eq	1,01E-02	8,64E-03	7,61E-04	1,42E-04	0*	5,71E-04	-4,44E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	3,53E-03	3,15E-03	1,92E-04	3,31E-05	0*	1,51E-04	-1,36E-04
Contribution to resource use, minerals and metals	kg Sb eq	4,32E-05	4,32E-05	0*	0*	0*	0*	-2,69E-06
Contribution to resource use, fossils	MJ	1,81E+01	1,68E+01	3,26E-01	1,51E-01	0*	7,88E-01	-7,81E-01
Contribution to water use	m3 eq	7,06E-01	6,56E-01	8,87E-05	4,40E-03	0*	4,54E-02	-1,43E-02

Inventory flows Indicators		TV Socket outlet - S520445+S520702						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,37E-01	1,09E-01	4,35E-04	2,03E-02	0*	6,90E-03	2,76E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	3,61E-01	3,61E-01	0*	0*	0*	0*	-2,07E-01
Contribution to total use of renewable primary energy resources	MJ	4,98E-01	4,70E-01	4,35E-04	2,03E-02	0*	6,90E-03	-1,80E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,65E+01	1,52E+01	3,26E-01	1,51E-01	0*	7,88E-01	-7,81E-01
Contribution to use of non renewable primary energy resources used as raw material	MJ	1,61E+00	1,61E+00	0*	0*	0*	0*	0,00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1,81E+01	1,68E+01	3,26E-01	1,51E-01	0*	7,88E-01	-7,81E-01
Contribution to use of secondary material	kg	1,32E-04	1,32E-04	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m³	1,64E-02	1,53E-02	2,07E-06	1,02E-04	0*	1,06E-03	-3,33E-04
Contribution to hazardous waste disposed	kg	1,93E-01	1,90E-01	0*	3,80E-04	0*	3,10E-03	-2,08E-01
Contribution to non hazardous waste disposed	kg	3,94E-01	3,58E-01	8,20E-04	8,48E-03	0*	2,70E-02	-6,47E-02
Contribution to radioactive waste disposed	kg	2,04E-04	1,99E-04	5,84E-07	1,04E-06	0*	2,95E-06	-4,63E-05
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	4,03E-02	8,80E-03	0*	9,47E-04	0*	3,06E-02	0,00E+00
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	7,91E-04	4,97E-04	0*	2,45E-04	0*	4,86E-05	0,00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg de C	0,00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	3,60E-03

Mandatory Indicators		TV Socket outlet - S520445+S520702							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-fossil	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-biogenic	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to acidification	mol H+ eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication marine	kg N eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication, terrestrial	mol N eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to resource use, minerals and metals	kg Sb eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to resource use, fossils	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to water use	m3 eq	0*	0*	0*	0*	0*	0*	0*	0*

Inventory flows Indicators		TV Socket outlet - S520445+S520702							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to non hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to radioactive waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01248-V01.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
Verifier accreditation N°	VH48	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue	09-2024	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006			
Internal                      External      X			
<p>The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)</p> <p>PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022</p> <p>The components of the present PEP may not be compared with components from any other program.</p> <p>Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"</p>			



Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 928 298 512 €

[www.se.com](http://www.se.com)

SCHN-01248-V01.01-EN

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

09-2024