

# Product End of Life Instructions

## Exiway Trend Activa-link IP65 1250 lumen






## Potential disassembly risks



## End of Life Instructions

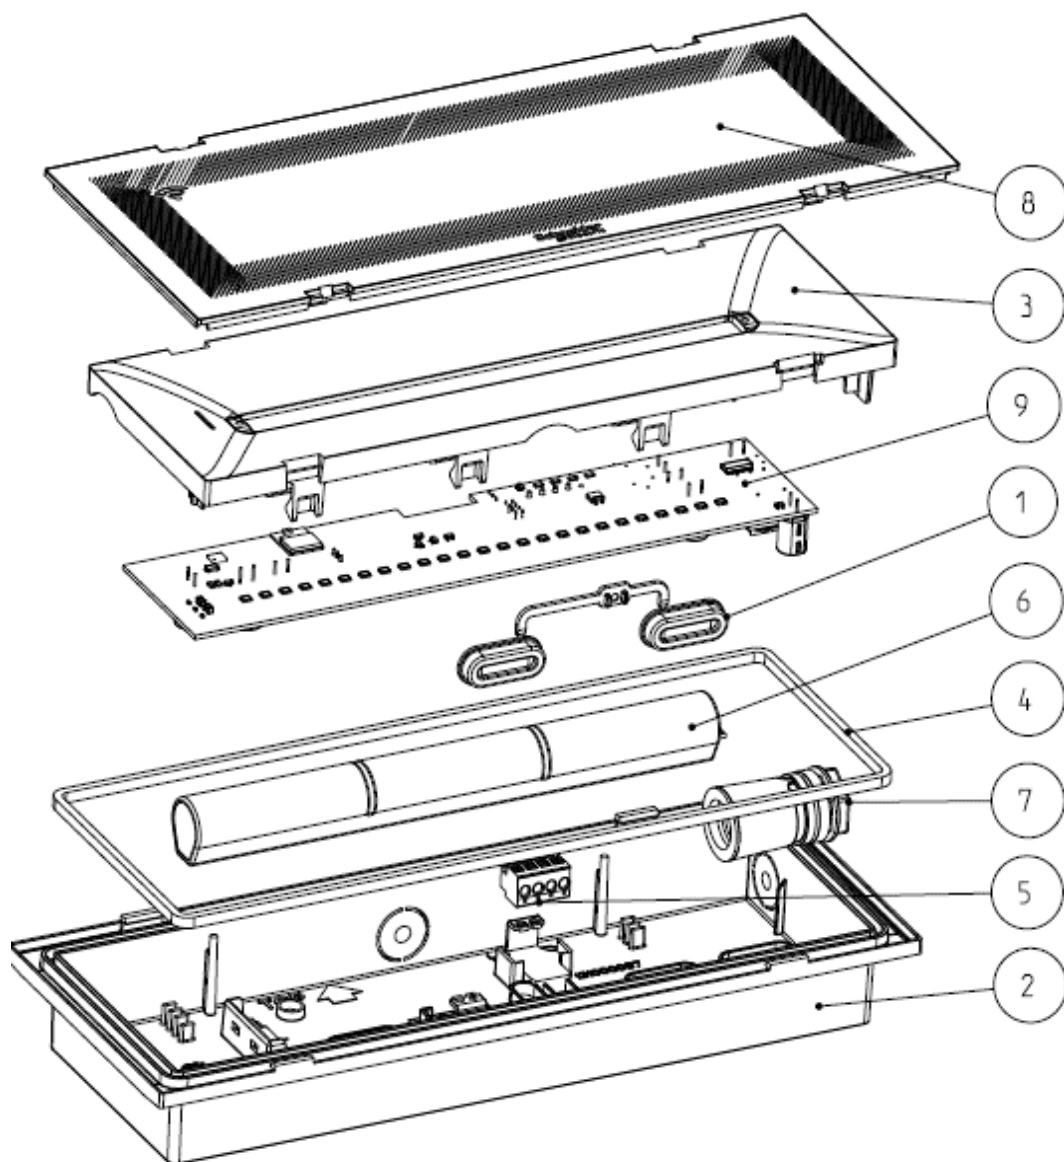

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be dismantled	1	PE (SEALING CAPS)	1	
To be dismantled	2	PC (TREND body)	148	
To be depolluted	3	Electronic Board (Communication) > 10cm <sup>2</sup>	60	
To be dismantled	4	ABS Acrylonitrile Butadiene Styrene (GASKET)	1	
To be dismantled	5	Electronic Board (Power) > 10cm <sup>2</sup> (Connector)	3	
To be depolluted	6	Battery (BATT.LFP3IFR18650 BST9,6V1,5AH+N LCF3)	132	
To be dismantled	7	PE (Cable Gland)	11	
To be dismantled	8	PC (Transparent screen)	85	
To be depolluted	9	Electronic Board (Power) > 10cm <sup>2</sup> (CS TREND ACT/L-LMR-25LED)	70	

## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	Wireless Maintained and non Maintained Emergency Luminaire compliant to EN 60598-2-22
Product reference	OVA47225
Additional similar product references	OVA47222 OVA47223 OVA47224 OVA47122 OVA47123 OVA47124 OVA47125 OVA47131 OVA47133
Total representative product mass	530 g
Representative product dimensions	292 x 116 x 37 mm
Date of information release	07/2023

## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	75%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.se.com](http://www.se.com)  
ENVEOLI2303010\_V1

Published by Schneider Electric  
© 2023 - Schneider Electric – All rights reserved

07/2023