

Product End of Life Instructions

Exiway Portable BP1000 IP65 1000 Lumen




Schneider
Electric



Potential disassembly risks



End of Life Instructions

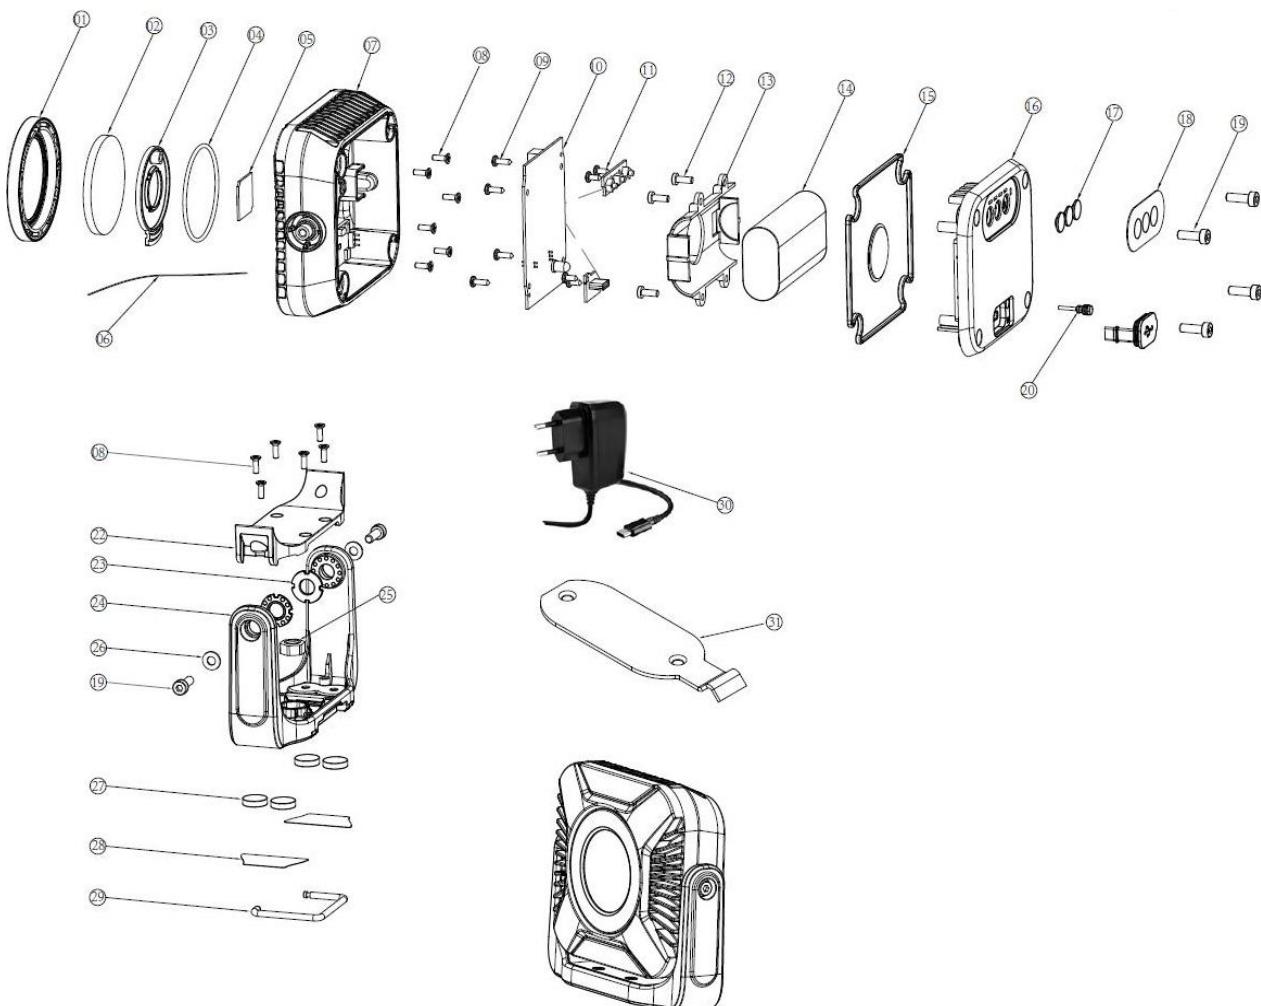

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be dismantled	1	PA6+30%GF (flange)	7.5	
To be depolluted	2	Glass (lens)	17.5	
To be dismantled	3	Silicone rubber (o-ring)	0.4	
To be depolluted	4	PC (reflector)	2	
To be depolluted	5	Aluminum (COB)	1	
To be depolluted	6	Copper+Teflon (wire)	1	
To be depolluted	7	Aluminum (front cover)	294	
To be depolluted	8	Steel (screw 1)	4.8	
To be depolluted	9	Steel (screw 2)	2	
To be depolluted	10	Electronic component	15	
To be depolluted	11	Steel (screw 3)	1.2	
To be depolluted	12	Steel (screw 4)	1.6	
To be dismantled	13	PC (battery holder)	6.2	
To be depolluted	14	Battery (Lithium-ion)	93.5	
To be dismantled	15	Silicone rubber (rear cover gasket)	1	
To be dismantled	16	PA6+30%GF (rear cover)	39.5	
To be depolluted	17	Silicone rubber (switch)	0.9	
To be dismantled	18	PET+Acrylic (keyboard sticker)	1	
To be depolluted	19	Steel (screw 5)	12	
To be dismantled	20	Silicone rubber (battery indicator)	0.5	
To be dismantled	21	Silicone rubber (DC cover)	1.5	
To be dismantled	22	PA6+30%GF (bracket-top)	15	
To be dismantled	23	POM+TPFE (gear)	1	
To be depolluted	24	PA6+30%GF (bracket-bottom)	60	
To be depolluted	25	Steel (nut)	3	
To be depolluted	26	Steel (washer)	0.2	
To be depolluted	27	Iron (magnet)	10	
To be dismantled	28	silicone ZQ-60 (magnet sticker)	0.01	
To be depolluted	29	Steel (hook)	5	

To be depolluted	30	Electronic component	87.5	
To be depolluted	31	Iron (metal bracket)	60	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric Industries SAS
Product function	Portable autonomous intervention luminiare (EN 60598-2-4). Luminaire in which the emergency lighting lamps are energized at all times when normal or emergency lighting is required
Product reference	OVA42041
Additional similar product references	OVA42041
Total representative product mass	890 g
Representative product dimensions	118mm x 108mm x 42mm
Accessories	Charger Metal braket
Date of information release	11/2024



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	59% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

*35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €*

www.se.com

ENVEOLI2410023_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

11/2024