Scheinwerfer | 176-264 V
1 arrayLED 16 W DC - 18 W AC | CRI 98
77051M30







Technische Daten	
Typ	Schiene
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Medium Flood
Light emission direction	frontal
Lampe Nennleistung	16 W DC
Gesamtleistung	18 W
Lichtstrom (Lichtquelle)	2212 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	176 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	98 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	90 °
Gesamtwinkel (horizontale Ebene)	360 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.412 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV

Oberfläche Oberfläche Gehäuse	
Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Scheinwerfer | 176-264 V | 1 arrayLED 16 W DC - 18 W AC | CRI 98
77051M30

Single emission projectors for indoor application. The super warm white LED light source with a medium flood light distribution is composed of 1 arrayled LEDs with CCT of 2700 K and a CRI 98; the source luminous flux is 2212 lm, with a 138.3 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 0.412 kg.

The total absorbed power is 18 W

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	72 %
Lichtstrom (Lichtquelle)	2212 lm
Leuchten Lichtstrom	1601 lm
Consumption	18 W
Leuchten Lichtausbeute	88 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	98 Ra
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 237566h (at Tj 65 Ta 25)
L80 B10 C0 148737h (at Tj 65 Ta 25)
L90 B10 C0 70385h (at Tj 65 Ta 25)

UGR	
UGR axial	18.1
UGR transversal	18.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	38°
Light distribution simmetry	Symmetrical

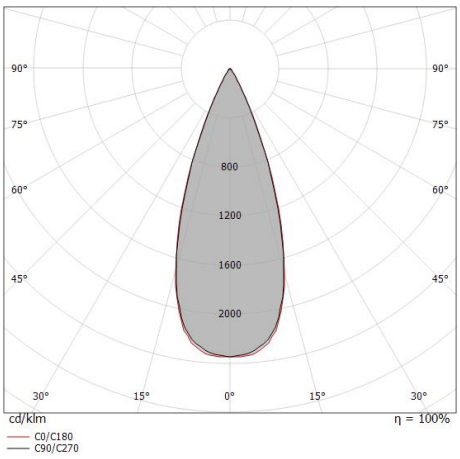

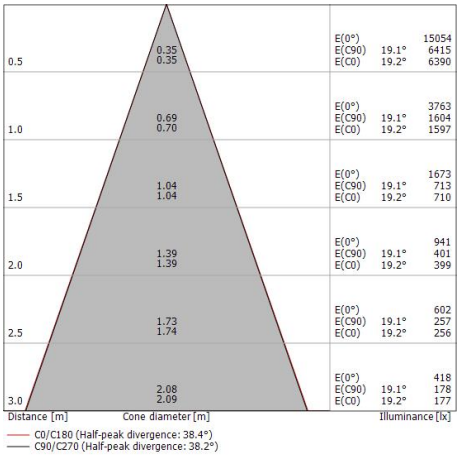



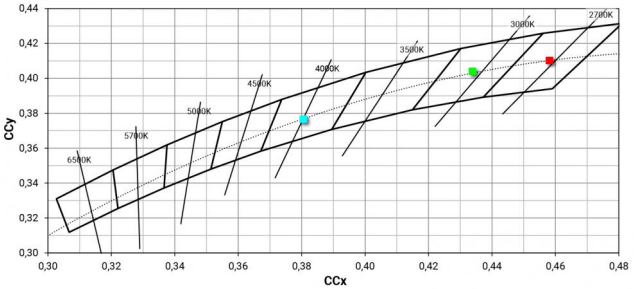

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30





Stromversorgung
Material:PC, farbe:Weiß.

Code
81033





Stromversorgung
Material:PC, farbe:Weiß.

Code
81036





Stromversorgung
Material:PC, farbe:Black.

Code
81037





Stromversorgung
Material:PC, farbe:Black.

Code
81034



Endkappe
Material:PC, farbe:Weiß.

Code
80999



Endkappe
Material:PC, farbe:Black.

Code
81000



Endkappe
Material:PC, farbe:Weiß.

Code
81002





Endkappe
Material:PC, farbe:Black.

Code
81003

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30





Endkappe
Material:Weiß.

Code
81084





Endkappe
Material:Schwarz, farbe:Black.

Code
81085



Deckenrosette - Weißes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81012





Deckenrosette - Schwarzes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81014





Deckenrosette - Weißes Aufhängungsset 5 m + Halterung (9000-KIT5-5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81013



Deckenrosette - Schwarzes Aufhängungsset 5 m + Halterung (9000-KIT5-5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81015





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Polished aluminium.

Code
81086





Klammer
L=180mm, H=24mm, D=26mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
81024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30





Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Weiß RAL 9010, bearbeitungstyp :Lackierung.

Code
81025





Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Schwarz RAL 9005, bearbeitungstyp :Lackierung.

Code
81026





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Weiß, bearbeitungstyp :Lackierung.

Code
81087





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
81088





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81039





Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81040





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81042





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81045

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81048




Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Weiß.

Code
81066




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81063




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81051




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81054




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81057




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81060




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81043

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81046




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81049




Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Black.

Code
81067




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81064




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81052




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81055




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81058




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81061

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81006



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81007



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81008



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81009



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81018



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81019



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81021



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81022

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81069




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81072




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81075




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81078




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81081




Drahtabdeckung
Material:PC, farbe:Black.

Code
81070




Drahtabdeckung
Material:PC, farbe:Black.

Code
81073




Drahtabdeckung
Material:PC, farbe:Black.

Code
81076

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30




Drahtabdeckung
Material:PC, farbe:Black.

Code
81079




Drahtabdeckung
Material:PC, farbe:Black.

Code
81082

Drahtabdeckung
Material:Weiß.

Code
83249



Drahtabdeckung
Material:Schwarz, farbe:Black.

Code
83250




Code
81094




Code
81091




Code
81095




Code
81093

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30



Werkzeug - Schneidezange S?9000/T
Material:Gummi, farbe:Black.

Code
81005





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80990





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80991





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80992





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80993





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80994





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80995





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83336

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83337





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83338





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83339





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83340





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83341





Blendschutz - Zubehör für Fokal-Kit mit Code 83347.
Blendschutzart: wabenraster.
Material:Pom-C, farbe:Schwarz.

Code
99841



Blendschutz
Blendschutzart: filtro ellittico.
Material:Pom-C, farbe:Schwarz.

Code
83345



Blendschutz
Blendschutzart: frangiluce a croce.
Material:Pom-C, farbe:Schwarz.

Code
83344

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77051M30



Blendschutz
Blendschutzart: schermo cilindrico 45°.
Material:Pom-C, farbe:Schwarz.

Code
83343



Blendschutz
Blendschutzart: wabenraster.
Material:Pom-C, farbe:Schwarz.

Code
83346



Blendschutz
Blendschutzart: schermo cilindrico.
Material:Pom-C, farbe:Schwarz.

Code
83342



Optik
Lichtverteilung: spot,Material Verkleidung: uv beständiges polycarbonat

Code
83348



Optik
Lichtverteilung: medium flood,Material Verkleidung: uv beständiges polycarbonat

Code
83349



Optik - Kit mit variabler Brennweite
Lichtverteilung: einstellbar,Material Verkleidung: aluminium

Code
83347



Optik
Lichtverteilung: flood,Material Verkleidung: uv beständiges polycarbonat

Code
83350

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.