

Product Environmental Profile

Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type

**Representative of all Acti9 Vigi iC60 up to 63A
- version 1P, 1P+N, 2P, 3P or 4P.**



Schneider
Electric




General information

Reference product	Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type - A9Q11225
Description of the product	This main function of the Vigi iC60 product range is to ensure protection of persons against electric shocks.
Description of the range	The products of the range are: Acti9 Vigi iC60 earth leakage add-on block The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Protect people and premises at risk against insulation defects in a circuit with rated voltage 230-240V, rated current 25A, with 2 poles, sensitivity 30mA, and the differential protection type AC, and if applicable the specific specifications, in the Household/Commercial application area, according to the appropriate use scenario, and during the 20-year reference service life of the product.



Constituent materials

Reference product mass	164 g	including the product, its packaging and additional elements and accessories
------------------------	-------	--

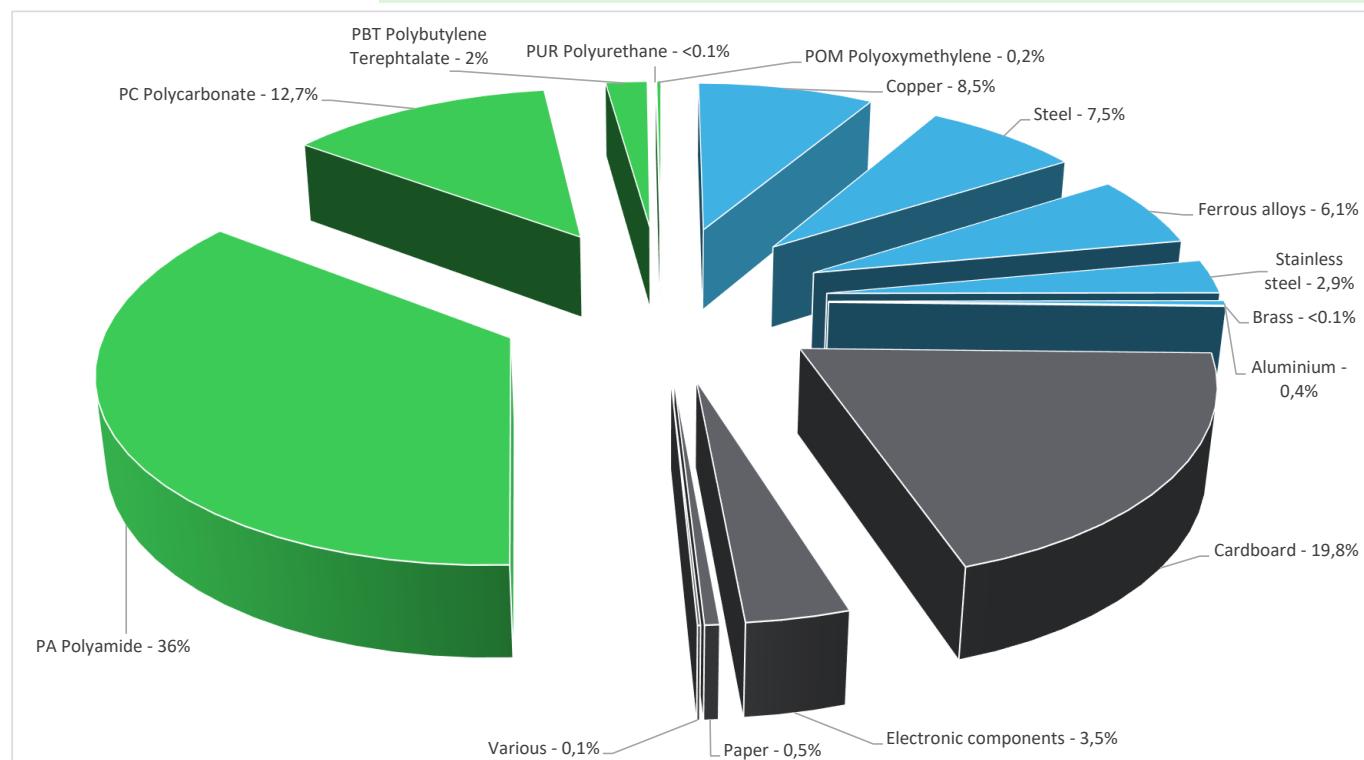

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



Additional environmental information

End Of Life	Recyclability potential:	28%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	-----	---


Environmental impacts

Reference service life time	20 years			
Product category	Blocks and differential switches - Household / Commercial			
Installation elements	The product does not require any specific installation operations			
Use scenario	Load rate = 20 % In (25A) Use rate = 30% RLT (20 years)			
Time representativeness	The collected data are representative of the year 2023			
Technological representativeness	The modules of technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product			
Geographical representativeness	Europe			
Energy model used	[A1 - A3] France, FR	[A5] Europe, EU-27	[B6] Europe, EU-27	[C1 - C4] Europe, EU-27

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type - A9Q11225						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	3,81E+00	1,03E+00	3,20E-02	3,27E-02	2,41E+00	3,00E-01	-6,34E-02
Contribution to climate change-fossil	kg CO2 eq	3,77E+00	1,00E+00	3,20E-02	3,11E-02	2,41E+00	2,97E-01	-6,11E-02
Contribution to climate change-biogenic	kg CO2 eq	3,89E-02	3,14E-02	0*	1,55E-03	3,22E-03	2,71E-03	-2,31E-03
Contribution to climate change-land use and land use change	kg CO2 eq	2,45E-05	2,44E-05	0*	0*	0*	6,24E-08	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	7,04E-08	5,78E-08	4,89E-11	4,23E-10	1,03E-08	1,75E-09	-1,31E-08
Contribution to acidification	mol H+ eq	2,23E-02	7,57E-03	2,02E-04	9,55E-05	1,38E-02	6,56E-04	-2,14E-03
Contribution to eutrophication, freshwater	kg (PO4)3- eq	1,19E-04	2,80E-05	1,20E-08	7,48E-07	6,61E-06	8,35E-05	-9,01E-08
Contribution to eutrophication marine	kg N eq	2,96E-03	1,11E-03	9,48E-05	4,15E-05	1,56E-03	1,44E-04	-4,97E-05
Contribution to eutrophication, terrestrial	mol N eq	3,86E-02	1,21E-02	1,04E-03	2,89E-04	2,35E-02	1,68E-03	-5,83E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	9,51E-03	3,71E-03	2,62E-04	6,62E-05	5,02E-03	4,43E-04	-3,02E-04
Contribution to resource use, minerals and metals	kg Sb eq	5,91E-05	5,63E-05	0*	0*	1,75E-07	2,63E-06	-2,68E-05
Contribution to resource use, fossils	MJ	8,41E+01	1,76E+01	4,45E-01	3,23E-01	6,15E+01	4,20E+00	-1,26E+00
Contribution to water use	m3 eq	8,10E-02	0*	1,21E-04	2,52E-03	8,54E-02	1,08E-01	-1,06E-01

Inventory flows Indicators		Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type - A9Q11225						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,23E+01	3,81E-01	0*	4,24E-02	1,18E+01	6,77E-02	-5,46E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	6,32E-01	6,32E-01	0*	0*	0*	0*	0,00E+00
Contribution to total use of renewable primary energy resources	MJ	1,29E+01	1,01E+00	0*	4,24E-02	1,18E+01	6,77E-02	-5,46E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	8,21E+01	1,57E+01	4,45E-01	3,23E-01	6,15E+01	4,20E+00	-1,26E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	1,97E+00	1,97E+00	0*	0*	0*	0*	0,00E+00
Contribution to total use of non-renewable primary energy resources	MJ	8,41E+01	1,76E+01	4,45E-01	3,23E-01	6,15E+01	4,20E+00	-1,26E+00
Contribution to use of secondary material	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m³	2,17E-03	0*	2,82E-06	5,87E-05	1,99E-03	2,52E-03	-2,47E-03
Contribution to hazardous waste disposed	kg	3,24E+00	3,19E+00	0*	8,14E-04	4,51E-02	5,34E-03	-2,31E+00
Contribution to non hazardous waste disposed	kg	1,45E+00	9,97E-01	1,12E-03	1,40E-02	3,47E-01	9,01E-02	-3,15E-02
Contribution to radioactive waste disposed	kg	3,36E-04	2,57E-04	7,98E-07	1,73E-06	7,27E-05	3,75E-06	-1,54E-05
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	3,91E-02	5,68E-03	0*	0*	0*	3,34E-02	0,00E+00
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	5,96E-03	4,21E-04	0*	1,33E-03	0*	4,20E-03	0,00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg de C 0,00E+00

Contribution to biogenic carbon content of the associated packaging kg de C 8,61E+00

Mandatory Indicators		Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type - A9Q11225							
Impact Indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	2,41E+00	0*	0*	0*	0*	0*	2,41E+00	0*
Contribution to climate change-fossil	kg CO2 eq	2,41E+00	0*	0*	0*	0*	0*	2,41E+00	0*
Contribution to climate change-biogenic	kg CO2 eq	3,22E-03	0*	0*	0*	0*	0*	3,22E-03	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1,03E-08	0*	0*	0*	0*	0*	1,03E-08	0*
Contribution to acidification	mol H+ eq	1,38E-02	0*	0*	0*	0*	0*	1,38E-02	0*
Contribution to eutrophication, freshwater	kg (PO4)3- eq	6,61E-06	0*	0*	0*	0*	0*	6,61E-06	0*
Contribution to eutrophication marine	kg N eq	1,56E-03	0*	0*	0*	0*	0*	1,56E-03	0*
Contribution to eutrophication, terrestrial	mol N eq	2,35E-02	0*	0*	0*	0*	0*	2,35E-02	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	5,02E-03	0*	0*	0*	0*	0*	5,02E-03	0*
Contribution to resource use, minerals and metals	kg Sb eq	1,75E-07	0*	0*	0*	0*	0*	1,75E-07	0*
Contribution to resource use, fossils	MJ	6,15E+01	0*	0*	0*	0*	0*	6,15E+01	0*
Contribution to water use	m3 eq	8,54E-02	0*	0*	0*	0*	0*	8,54E-02	0*

Inventory flows Indicators		Acti9 - Vigi iC60 - Disconnector add-on block - 25A - 2P - AC Type - A9Q11225							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,18E+01	0*	0*	0*	0*	0*	1,18E+01	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	1,18E+01	0*	0*	0*	0*	0*	1,18E+01	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6,15E+01	0*	0*	0*	0*	0*	6,15E+01	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	6,15E+01	0*	0*	0*	0*	0*	6,15E+01	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	1,99E-03	0*	0*	0*	0*	0*	1,99E-03	0*
Contribution to hazardous waste disposed	kg	4,51E-02	0*	0*	0*	0*	0*	4,51E-02	0*
Contribution to non hazardous waste disposed	kg	3,47E-01	0*	0*	0*	0*	0*	3,47E-01	0*
Contribution to radioactive waste disposed	kg	7,27E-05	0*	0*	0*	0*	0*	7,27E-05	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00488-V02.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
Verifier accreditation N°	VH48	Information and reference documents	www.pep-ecopassport.org
Date of issue	05-2024	Validity period	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2006</i>			
Internal	External <input checked="" type="checkbox"/>		
<p><i>The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDmain)</i></p> <p><i>PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022</i></p> <p><i>The components of the present PEP may not be compared with components from any other program.</i></p> <p><i>Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"</i></p>			
			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

SCHN-00488-V02.01-EN

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

05-2024