Product Environmental Profile

PowerLogic PM5RD Remote Display








General information

Reference product	PowerLogic PM5RD Remote Display - METSEPM5RD
Description of the product	The PowerLogic™ PM5RD is a single 96 x 96 mm unit, with a graphical display. The bright, anti-glare backlight LCD, 128 pixels by 128 pixels display features large characters and powerful backlighting for easy reading even in extreme lighting conditions and viewing angles. Easy to understand menus, text in 8 selectable languages with ethernet gateway and enhanced cyber security.
Description of the range	Single product
Functional unit	The PowerLogic™ PM5RD is designed as communication module for use in both energy management systems and building management systems. It provides the measurement capabilities needed to allocate energy usage, perform tenant metering and subbilling, pin-point energy savings, optimize equipment efficiency and utilization, and perform a high level assessment of the power quality of the electrical network during the lifetime of 10 years.
Specifications are:	Display Type - Backlit LCD Monochrome Display Resolution - 128 x 128 pixels Information Displayed - Power Energy consumption, Harmonic distortion, Frequency, Voltage, Current Control type - 4 x push-button Operating Temperature2570 °C IP degree of protection IP52 IEC 60529

<u>&</u>

Constituent materials

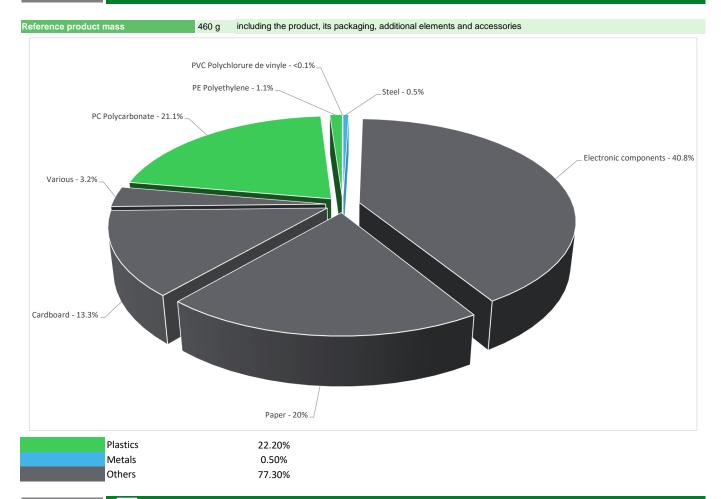

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website https://www.se.com



Additional environmental information

End Of Life

Recyclability potential:

10%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	10 years									
Product category	Other equipments - Active product									
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study									
Electricity consumtion	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption									
Installation elements	The installation requires a RJ25 cable, which is considered as part of the BOM									
Use scenario	The product is in stand-by mode 100% of the time with a power use of 3.34W for 10 years.									
Time representativeness	The collected data are representative of the year 20	024								
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and Representative of the actual type of technologies used to make the product.									
Final assembly site	India									
Geographical representativeness	Rest of the World									
	[A1 - A3]	[A5]	[B6]	[C1 - C4]						
			Electricity Mix; Low voltage; 2020; India, IN							
	Electricity Mix; Low voltage; 2020; India, IN Electricity Mix; Low voltage; 2020; China, CN Electricity Mix; Low voltage; 2020; Brazil, BR Electricity Mix; Low voltage; 2020; Europe, EU-27		Electricity Mix; Low voltage; 2020; United States, US	Electricity Mix; Low voltage;						
Energy model used		-	Electricity Mix; Low voltage; 2020; United Kingdom, GB	2020; Europe, EU-27 Electricity Mix; Low voltage;						
			Electricity Mix; Low voltage; 2020; Germany, DE	2020; Global, GLO						
			Electricity Mix; Low voltage; 2020; Brazil, BR							

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		Pow	erLogic PM5RD	Remote Displa	y - METSEPM5RD)		
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	2.58E+02	2.52E+01	1.43E-01	2.68E-02	2.32E+02	7.07E-01	-7.06E-02
Contribution to climate change-fossil	kg CO2 eq	2.58E+02	2.54E+01	1.43E-01	2.68E-02	2.32E+02	7.01E-01	-6.52E-02
Contribution to climate change-biogenic	kg CO2 eq	-1.08E-01	-2.62E-01	0*	0*	0*	0*	-5.42E-03
Contribution to climate change-land use and land use chan	ge kg CO2 eq	1.05E-04	1.05E-04	0*	0*	0*	9.37E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.60E-06	3.32E-06	0*	0*	1.27E-06	6.67E-09	-1.91E-08
Contribution to acidification	mol H+ eq	1.76E+00	1.64E-01	9.05E-04	0*	1.60E+00	1.28E-03	-4.53E-03
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	3.82E-04	4.89E-05	5.36E-08	0*	1.56E-04	1.78E-04	-9.47E-08
Contribution to eutrophication marine	kg N eq	1.95E-01	1.86E-02	4.24E-04	3.87E-05	1.75E-01	3.09E-04	-7.16E-05
Contribution to eutrophication, terrestrial	mol N eq	2.43E+00	1.97E-01	4.65E-03	4.00E-04	2.23E+00	3.59E-03	-8.41E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	6.44E-01	6.53E-02	1.17E-03	9.50E-05	5.76E-01	8.77E-04	-5.23E-04
Contribution to resource use, minerals and metals	kg Sb eq	4.18E-03	4.14E-03	0*	0*	2.79E-05	5.73E-06	-3.95E-05
Contribution to resource use, fossils	MJ	4.50E+03	3.22E+02	1.99E+00	0*	4.18E+03	2.49E+00	-1.21E+00
Contribution to water use	m3 eq	2.05E+01	6.56E+00	0*	1.59E-02	1.30E+01	8.82E-01	-2.32E-01

Inventory flows Indicators		Pow	erLogic PM5RD	Remote Displa	isplay - METSEPM5RD						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads			
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.67E+02	1.10E+01	0*	0*	5.55E+02	1.44E-01	-1.17E-01			
Contribution to use of renewable primary energy resources used as raw material	MJ	2.92E+00	2.92E+00	0*	0*	0*	0*	0.00E+00			
Contribution to total use of renewable primary energy resources	MJ	5.70E+02	1.39E+01	0*	0*	5.55E+02	1.44E-01	-1.17E-01			
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.50E+03	3.15E+02	1.99E+00	0*	4.18E+03	2.49E+00	-1.21E+00			
Contribution to use of non renewable primary energy resources used as raw material	MJ	7.00E+00	7.00E+00	0*	0*	0*	0*	0.00E+00			
Contribution to total use of non-renewable primary energy resources	MJ	4.50E+03	3.22E+02	1.99E+00	0*	4.18E+03	2.49E+00	-1.21E+00			
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00			
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00			
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00			
Contribution to net use of freshwater	m³	4.94E-01	1.52E-01	0*	3.71E-04	3.04E-01	3.72E-02	-5.85E-03			
Contribution to hazardous waste disposed	kg	8.46E+01	7.63E+01	0*	0*	8.13E+00	1.61E-01	-3.60E+00			
Contribution to non hazardous waste disposed	kg	4.62E+01	5.75E+00	5.02E-03	1.61E-01	4.02E+01	1.21E-01	-1.15E-02			
Contribution to radioactive waste disposed	kg	6.48E-03	2.67E-03	3.57E-06	0*	3.80E-03	5.97E-06	-7.99E-06			
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00			
Contribution to materials for recycling	kg	2.98E-02	8.33E-05	0*	0*	0*	2.98E-02	0.00E+00			
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00			
Contribution to exported energy	MJ	3.03E-05	8.95E-06	0*	0*	0*	2.14E-05	0.00E+00			

 $^{^{\}star}$ represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 5.21E-02

^{*} The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators			PowerLog	ic PM5RD	Remote	Display	- METSEPM5RI	D	
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	2.32E+02	0*	0*	0*	0*	0*	2.32E+02	0*
Contribution to climate change-fossil	kg CO2 eq	2.32E+02	0*	0*	0*	0*	0*	2.32E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-land use and land use change-	nge kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1.27E-06	0*	0*	0*	0*	0*	1.27E-06	0*
Contribution to acidification	mol H+ eq	1.60E+00	0*	0*	0*	0*	0*	1.60E+00	0*
Contribution to eutrophication, freshwater	kg (PO4)³- eq	1.56E-04	0*	0*	0*	0*	0*	1.56E-04	0*
Contribution to eutrophication marine	kg N eq	1.75E-01	0*	0*	0*	0*	0*	1.75E-01	0*
Contribution to eutrophication, terrestrial	mol N eq	2.23E+00	0*	0*	0*	0*	0*	2.23E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.76E-01	0*	0*	0*	0*	0*	5.76E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	2.79E-05	0*	0*	0*	0*	0*	2.79E-05	0*
Contribution to resource use, fossils	MJ	4.18E+03	0*	0*	0*	0*	0*	4.18E+03	0*
Contribution to water use	m3 eq	1.30E+01	0*	0*	0*	0*	0*	1.30E+01	0*

Inventory flows Indicators					ic PM5RD	Remote	Display	- METSEPM5R	D
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.55E+02	0*	0*	0*	0*	0*	5.55E+02	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	5.55E+02	0*	0*	0*	0*	0*	5.55E+02	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.18E+03	0*	0*	0*	0*	0*	4.18E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	4.18E+03	0*	0*	0*	0*	0*	4.18E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	3.04E-01	0*	0*	0*	0*	0*	3.04E-01	0*
Contribution to hazardous waste disposed	kg	8.13E+00	0*	0*	0*	0*	0*	8.13E+00	0*
Contribution to non hazardous waste disposed	kg	4.02E+01	0*	0*	0*	0*	0*	4.02E+01	0*
Contribution to radioactive waste disposed	kg	3.80E-03	0*	0*	0*	0*	0*	3.80E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.3, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01306-V01.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06						
	•	Supplemented by	PSR-0005-ed3.1-EN-2023 12 08						
Verifier accreditation N°	VH42	Information and reference documents	www.pep-ecopassport.org						
Date of issue	11-2024	Validity period	5 years						
Independent verification of the	Independent verification of the declaration and data, in compliance with ISO 14025 : 2006								
Internal	Internal External X								
The PCR review was conduct	The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)								
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022 The components of the present PEP may not be compared with components from any other program.									
The components of the prese	The components of the present PEP may not be compared with components from any other program.								

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

SCHN-01306-V01.01-EN

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

11-2024