# **Product Environmental Profile**

**Pro-Face Cable for HMI** 

## **Pro-Face USB Front Panel Adapter Cable**






### General information

Reference product	Pro-Face USB Front Panel Adapter Cable - PFXZC5CBUBEX1						
Description of the product	This cable is a remote USB type A port location for terminal. It enables the USB port to be located remotely on the rear of the HMI terminal on a panel or cabinet door. It has 1 meter cable length and 21mm fixing hole diameter.						
Description of the range	The products of the range are: PF model Cable(without PCBA)  The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.						
Functional unit	"To transmit energy expressed in "Specification" during 20 years and a 100% use rate"						
Specifications are:	To power the HMI panel 5 V voltages. Number of pins : 4						

# <u>&</u>

### **Constituent materials**

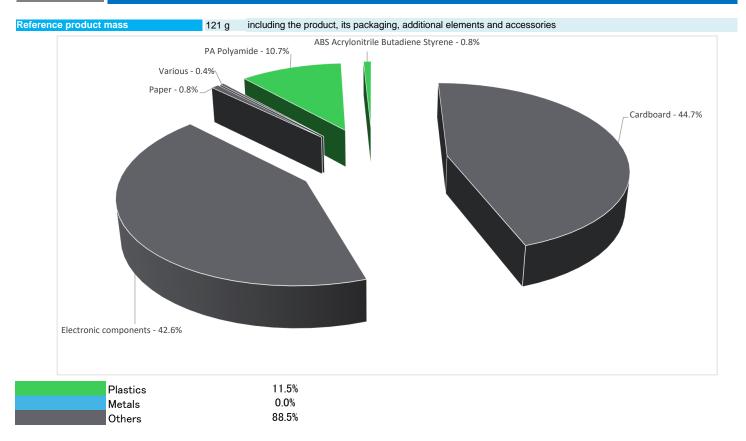

### **Substance assessment**

Details of ROHS and REACH substances information are available on the Schneider-Electric website https://www.se.com



### Additional environmental information

End Of Life

Recyclability potential:

20%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

### **Tensor** Environmental impacts

Reference service life time	20 years								
Product category	Other equipments - Passive product - continuous operation								
Life cycle of the product	The manufacturing, the distribution, the installati	on, the use and the end of life	were taken into consideration	in this study					
Electricity consumtion	The electricity consumed during manufacturing pagenerates a negligable consumption	processes is considered for ea	ach part of the product individua	ally, the final assembly					
Use scenario	Load rate: 30% In Use time rate: 100%								
Time representativeness	The collected data are representative of the year 2025								
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.								
Geographical	Final assembly site	End-of-life							
representativeness	Asia All of the world All of the world								
	[A1 - A3]	[B6]	[C1 - C4]						
Energy model used	Electricity Mix; Low voltage; 2020; China, CN	No energy used	Electricity Mix; Low voltage; 2020; France, FR Electricity Mix; Low voltage; 2020; United States, US Electricity Mix: Low voltage:	Global, European and French datasets are used.					

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators	Pro-Face USB Front Panel Adapter Cable - PFXZC5CBUBEX1								
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to climate change	kg CO2 eq	4.86E+01	8.57E-01	1.75E-01	0*	4.74E+01	1.60E-01	-3.04E-02	
Contribution to climate change-fossil	kg CO2 eq	4.82E+01	8.58E-01	1.75E-01	0*	4.70E+01	1.60E-01	-2.78E-02	
Contribution to climate change-biogenic	kg CO2 eq	3.62E-01	0*	0*	0*	3.64E-01	7.98E-05	-2.64E-03	
Contribution to climate change-land use and land use change	e kg CO2 eq	2.61E-08	1.93E-08	0*	0*	0*	6.77E-09	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	5.02E-07	2.54E-07	2.67E-10	8.46E-11	2.45E-07	1.54E-09	-8.73E-09	
Contribution to acidification	mol H+ eq	2.90E-01	8.60E-03	1.13E-03	0*	2.80E-01	2.49E-04	-2.19E-03	
Contribution to eutrophication, freshwater	kg P eq	1.47E-04	6.01E-06	6.54E-08	0*	1.41E-04	2.14E-07	-3.95E-08	
Contribution to eutrophication, marine	kg N eq	3.46E-02	1.72E-03	5.31E-04	1.35E-05	3.23E-02	7.35E-05	-3.26E-05	
Contribution to eutrophication, terrestrial	mol N eq	4.14E-01	1.84E-02	5.84E-03	1.38E-04	3.89E-01	8.20E-04	-3.84E-04	
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.14E-01	5.36E-03	1.50E-03	3.31E-05	1.06E-01	2.09E-04	-2.46E-04	
Contribution to resource use, minerals and metals	kg Sb eq	1.21E-04	1.12E-04	0*	0*	9.23E-06	0*	-2.14E-05	
Contribution to resource use, fossils	MJ	1.28E+03	1.83E+01	2.43E+00	0*	1.26E+03	6.67E-01	-4.98E-01	
Contribution to water use	m3 eq	3.42E+00	4.34E-01	6.62E-04	5.04E-03	2.97E+00	1.04E-02	-1.07E-01	

Inventory flows Indicators	Pro-Face USB Front Panel Adapter Cable - PFXZC5CBUBEX1								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to renewable primary energy used as energy	MJ	1.38E+02	0*	0*	0*	1.38E+02	2.68E-02	-5.66E-02	
Contribution to renewable primary energy used as raw material	MJ	1.12E+00	1.12E+00	0*	0*	0*	0*	0.00E+00	
Contribution to total renewable primary energy	MJ	1.39E+02	9.36E-01	0*	0*	1.38E+02	2.68E-02	-5.66E-02	
Contribution to non renewable primary energy used as energy	MJ	1.28E+03	1.66E+01	2.43E+00	0*	1.26E+03	6.67E-01	-4.98E-01	
Contribution to non renewable primary energy used as raw material	MJ	1.65E+00	1.65E+00	0*	0*	0*	0*	0.00E+00	
Contribution to total non renewable primary energy	MJ	1.28E+03	1.83E+01	2.43E+00	0*	1.26E+03	6.67E-01	-4.98E-01	
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of fresh water	m³	7.98E-02	1.01E-02	1.54E-05	1.17E-04	6.93E-02	2.65E-04	-2.50E-03	
Contribution to hazardous waste disposed	kg	4.15E+00	2.89E+00	0*	0*	1.23E+00	3.83E-02	-1.66E+00	
Contribution to non hazardous waste disposed	kg	9.66E+00	1.66E+00	6.12E-03	5.51E-02	7.91E+00	2.70E-02	-2.27E-03	
Contribution to radioactive waste disposed	kg	1.22E-03	1.02E-04	4.36E-06	0*	1.11E-03	1.78E-06	-2.41E-06	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	1.36E-02	6.60E-05	0*	0*	0*	1.35E-02	0.00E+00	
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	2.13E-06	2.13E-06	0*	0*	0*	0*	0.00E+00	

 $<sup>^{\</sup>ast}$  represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product \$\$ kg of C\$\$ 0.00E+00\$\$ Contribution to biogenic carbon content of the associated packaging \$\$ kg of C\$\$ 1.55E-02\$\$

<sup>\*</sup> The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators				Pro-Face USB	Front Pa	nel Adar	ter Cabl	e - PFXZC5CBI	JBEX1
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	4.74E+01	0*	0*	0*	0*	0*	4.74E+01	0*
Contribution to climate change-fossil	kg CO2 eq	4.70E+01	0*	0*	0*	0*	0*	4.70E+01	0*
Contribution to climate change-biogenic	kg CO2 eq	3.64E-01	0*	0*	0*	0*	0*	3.64E-01	0*
Contribution to climate change-land use and land use char	nge kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	2.45E-07	0*	0*	0*	0*	0*	2.45E-07	0*
Contribution to acidification	mol H+ eq	2.80E-01	0*	0*	0*	0*	0*	2.80E-01	0*
Contribution to eutrophication, freshwater	kg P eq	1.41E-04	0*	0*	0*	0*	0*	1.41E-04	0*
Contribution to eutrophication marine	kg N eq	3.23E-02	0*	0*	0*	0*	0*	3.23E-02	0*
Contribution to eutrophication, terrestrial	mol N eq	3.89E-01	0*	0*	0*	0*	0*	3.89E-01	0*
ontribution to photochemical ozone formation - human ealth	kg COVNM eq	1.06E-01	0*	0*	0*	0*	0*	1.06E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	9.23E-06	0*	0*	0*	0*	0*	9.23E-06	0*
ontribution to resource use, fossils	MJ	1.26E+03	0*	0*	0*	0*	0*	1.26E+03	0*
Contribution to water use	m3 eq	2.97E+00	0*	0*	0*	0*	0*	2.97E+00	0*

Inventory flows Indicators				Pro-Face USE	3 Front Pa	nel Adar	ter Cabl	e - PFXZC5CBI	JBEX1	
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.38E+02	0*	0*	0*	0*	0*	1.38E+02	0*	
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of renewable primary energy resources	MJ	1.38E+02	0*	0*	0*	0*	0*	1.38E+02	0*	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.26E+03	0*	0*	0*	0*	0*	1.26E+03	0*	
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of non-renewable primary energy resources	MJ	1.26E+03	0*	0*	0*	0*	0*	1.26E+03	0*	
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to net use of freshwater	m³	6.93E-02	0*	0*	0*	0*	0*	6.93E-02	0*	
Contribution to hazardous waste disposed	kg	1.23E+00	0*	0*	0*	0*	0*	1.23E+00	0*	
Contribution to non hazardous waste disposed	kg	7.91E+00	0*	0*	0*	0*	0*	7.91E+00	0*	
Contribution to radioactive waste disposed	kg	1.11E-03	0*	0*	0*	0*	0*	1.11E-03	0*	
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
*	· 41	fl								

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.3.1, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number:	ENVPEP2507015_V2	Drafting rules PEP-PCR-ed4-2021 09 06						
		Supplemented by PSR-0005-ed3-2023 12 08						
Date of issue	2025-09	Information and reference documents www.pep-ecopassport.org						
		Validity period 5 years						
Independent verification of the declaration and data, in compliance with ISO 14021: 2016								
Internal X	External							

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

Schneider Electric Industries SAS Country Customer Care Center http://www.se.com/contact Head Office 35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

ENVPEP2507015\_V2

Published by Schneider Electric ©2025 - Schneider Electric - All rights reserved

2025-09