


P31 – OPENING HINGE

Reference(s): 31X99Z999
341710



1. USE


Use this accessory to create a hinge between cable tray and cover.

2. RANGE

■ 2.1 Opening hinge PG

Description	Code	Code Export	Weight		Thickness		Coating
			(Kg)	(lb)	(mm)	(inch)	
P31 - OPENING HINGE PG	31X99Z999	341710	0,01	0,02	1,15	0,05	PG


3. DIMENSIONS

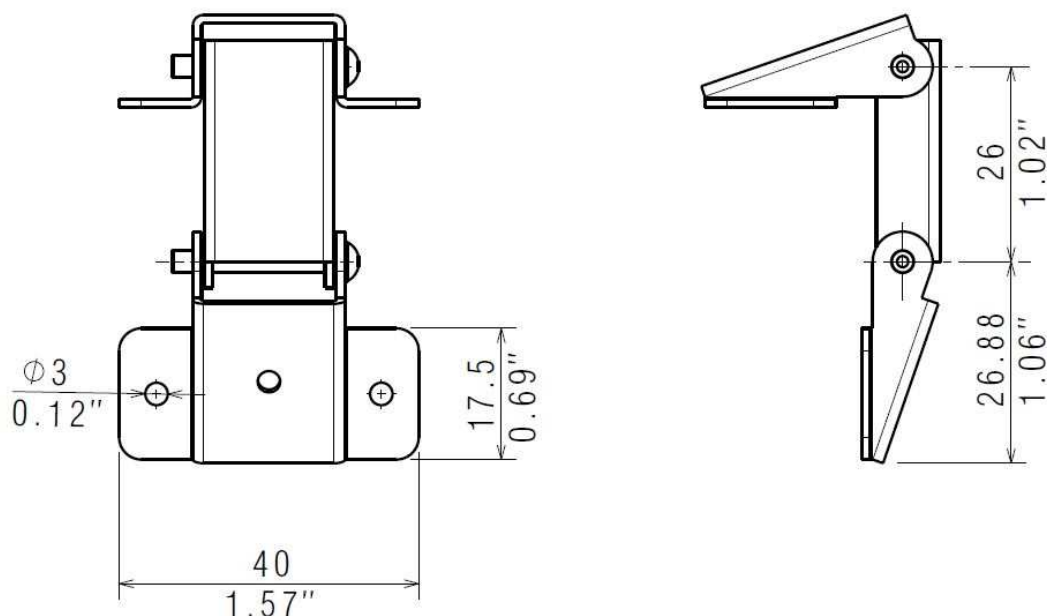

4. INSTALLATION

■ 4.1 Opening hinge to cable tray

Drill 2 holes on the side of cable tray and other 2 holes on the bottom of the cover to fix the hinge; use 2,5mm diameter drill bit.
Fix the hinge using 4 self-threading screws M3.

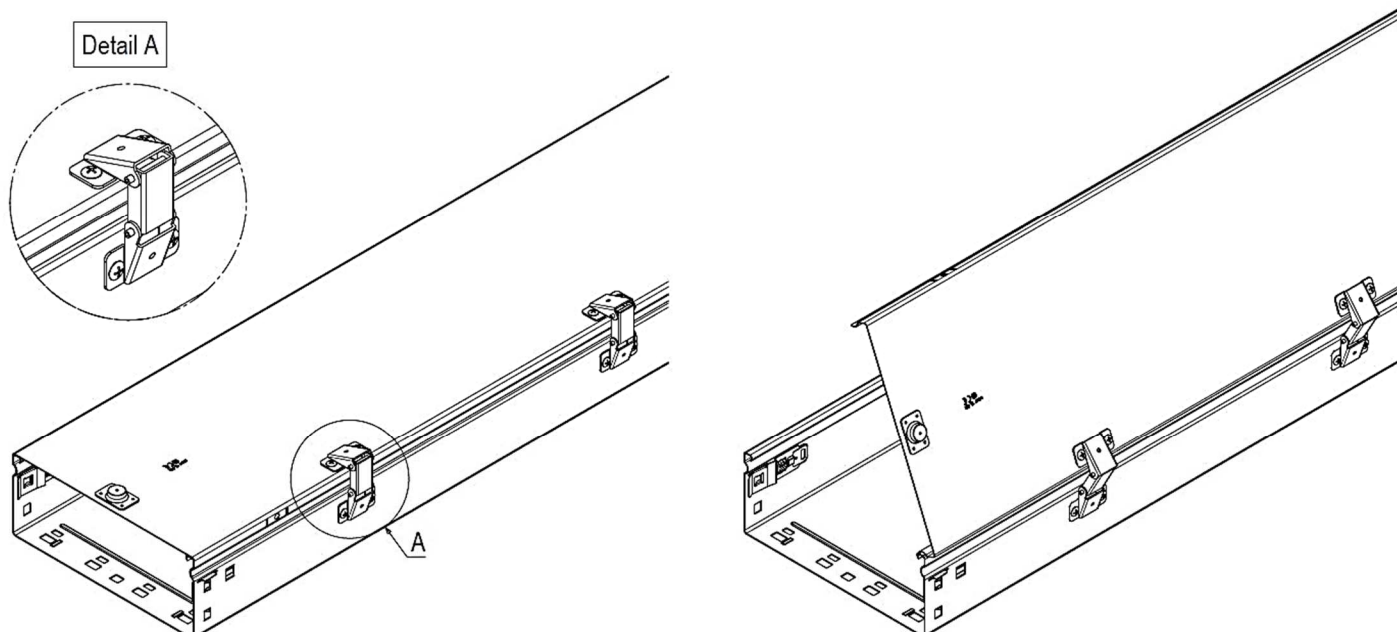

5. TECHNICAL DATA

■ 5.1 Climatic characteristics

Storage and operating temperature: - 20° C à + 120° C

■ 5.2 Material characteristics

Material finish	Material	Standard	Resistance class against corrosion
PG	DX51D + Z200	EN 10346	Classe 3 - CEI 61537
BLUE	DX51D + Z200	EN 10346	Classe 3 - CEI 61537
HDG	DC 01	EN 10130	Classe 6 - CEI 61537
SS304	X5CrNi18-10	EN 10 088-2	Classe 9A - CEI 61537
SS316L	X2CrNiMo17-12-2	EN 10 088-2	Classe 9B - CEI 61537

8. CONFORMITY - CERTIFICATION

Comply with CEI 61537 Cable tray systems

Certification: CE, IMQ