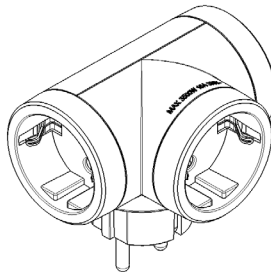
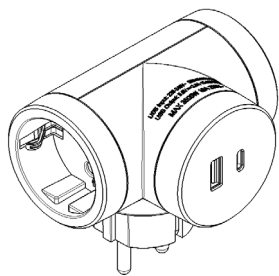


Multi-outlet-plug

S3626D - S3626DR - S3626DRAC


Use



Multi outlet plug 16A 250V
To connect up to 3 German sockets standard.

Connection

Plug 16A German standard.
Socket 16A German standard

Range
Dimension

ITEM	DESIGNATION
S3626D	Multi-outlet-plug with 3 German sockets 16A, white
S3626DR	Multi-outlet-plug with 3 German sockets 16A, plug rotative, white
S3626DRAC	Multi-outlet-plug with 2 German sockets 16A, 2 USB sockets, plug rotative, white

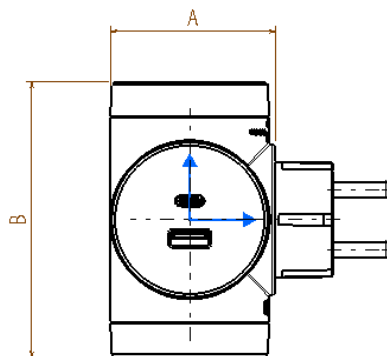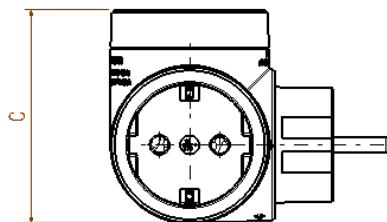

A	B	C
52	88	68

Technical characteristics**Protection index**

Penetration by solid bodies/liquid: IP20.

Material characteristics:

Cover: Polypropilene.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

Electrical characteristics:

Voltage: 250 V ~

Frequency: 50 / 60 Hz

Current: input 16A.

Max power: 3500W.

USB sockets type A – C,

USB Output 5V --, 3A, 15W max

Climatic characteristics:

Storage temperature: -10° C to + 70° C

Use temperature: - 5° C to + 35° C.

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards:

CEI 23-50, CEI 23-57

IEC 60884-2.5

Refer to e.catalogue