	<p>Pila Lito-Ferro "AAA" Art. 30/26150-00 - Art. 30/26155-00 Product Specification</p>	<p>Page 1 of 7</p>
<p style="text-align: center;">Specification Approval Sheet</p> <p style="text-align: center;">Model: ART. 30/26150-00 ART. 30/26155-00</p> <p>Note: 1. Kindly please sign on the above and send it back to us if the sample is approved. 2. Kindly please contact us as soon as possible if the sample isn't approved. Thanks!</p>		

	<p>Pila Litio-Ferro "AAA" Art. 30/26150-00 - Art. 30/26155-00 Product Specification</p>	<p>Page 2 of 7</p>
---	--	--------------------

1. Scope

This specification is suitable for the performance of the Extracell *Lithium and Iron Disulfide* battery.

2. Model

Art. 30/26150-00 - Art. 30/26155-00

3. Reference Document

Q/(GZ)PH001-2004: *Lithium and iron disulfide battery*

IEC60086-4: 2000 *Primary batteries-Part 4: Safety of lithium batteries*

4. Specification


No.	Items	Specification
1	Nominal Voltage	1.5 V
2	Rated Capacity	1100 mAh
3	Working Voltage	1.30V @ 100mA discharge
4	Max. Discharge Current	1000 mA continuous
5	Discharge Cut-off Voltage	0.80V
6	Volume	3.8 cubic centimeters
7	Weight	Approx. 7.5 g
8	Lithium Content	Less than 0.5 gram per cell
9	Dimensions	Diameter: 10.0±0.5 mm
		Height: 43.9±0.6 mm
10	Operating Temp.	-20 °C to 60 °C
11	Storage Temp.	-20 °C to 40 °C
12	Storage Humidity	≤75 %
13	Shell Life	5 Years
14	Note:Polyswitch is inside the cell.	

5. Test Conditions and Performance

5.1 Measuring Instrument or Apparatus

5.1.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by calipers with equal or more

	<p>Pila Litio-Ferro "AAA" Art. 30/26150-00 - Art. 30/26155-00 Product Specification</p>	<p>Page 3 of 7</p>																								
<p>precision scale of 0.01 mm.</p> <p>5.1.2 Voltmeter Standard class specified in the national standard or more sensitive class having inner impedance more than 10 kΩ/V.</p> <p>5.1.3 Ammeter Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω.</p> <p>5.2 Standard Test Conditions Unless other defined, test and measurement shall be done under temperature of 20±5°C and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature 10~30°C and humidity 25~85%RH.</p>																										
<p>5.3 Basic Characteristics</p>																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th data-bbox="225 1151 316 1189">No.</th> <th data-bbox="316 1151 571 1189">Item</th> <th data-bbox="571 1151 1150 1189">Measuring Procedure</th> <th data-bbox="1150 1151 1394 1189">Criteria</th> </tr> </thead> <tbody> <tr> <td data-bbox="225 1189 316 1294">1</td> <td data-bbox="316 1189 571 1294">Open-Circuit Voltage</td> <td data-bbox="571 1189 1150 1294">The open-circuit voltage shall be measured by voltmeter.</td> <td data-bbox="1150 1189 1394 1294">≥1.72 V</td> </tr> <tr> <td data-bbox="225 1294 316 1368">2</td> <td data-bbox="316 1294 571 1368">Dimension</td> <td data-bbox="571 1294 1150 1368">Use calipers test cell's dimensions.</td> <td data-bbox="1150 1294 1394 1368">As item 4.9</td> </tr> <tr> <td data-bbox="225 1368 316 1559">3</td> <td data-bbox="316 1368 571 1559">Discharge Capacity</td> <td data-bbox="571 1368 1150 1559">The capacity means the discharge capacity of the cell, which is measured by continuously discharging with a current of 300 mA to 0.8V.</td> <td data-bbox="1150 1368 1394 1559">≥1050 mAh</td> </tr> <tr> <td data-bbox="225 1559 316 1742">4</td> <td data-bbox="316 1559 571 1742">External Short Circuit</td> <td data-bbox="571 1559 1150 1742">Positive and negative of fresh battery are connected by a Cu wire. This short-circuit condition is continued for 1 day at room temperature (20±2°C).</td> <td data-bbox="1150 1559 1394 1742">No leakage; No explosion.</td> </tr> <tr> <td data-bbox="225 1742 316 1924">5</td> <td data-bbox="316 1742 571 1924">Forced Discharge</td> <td data-bbox="571 1742 1150 1924">Discharged to 0.8V at 300mA; And then the sample cell is forced discharged with 300mA for 3 hours.</td> <td data-bbox="1150 1742 1394 1924">No explosion; No fire</td> </tr> </tbody> </table>			No.	Item	Measuring Procedure	Criteria	1	Open-Circuit Voltage	The open-circuit voltage shall be measured by voltmeter.	≥1.72 V	2	Dimension	Use calipers test cell's dimensions.	As item 4.9	3	Discharge Capacity	The capacity means the discharge capacity of the cell, which is measured by continuously discharging with a current of 300 mA to 0.8V.	≥1050 mAh	4	External Short Circuit	Positive and negative of fresh battery are connected by a Cu wire. This short-circuit condition is continued for 1 day at room temperature (20±2°C).	No leakage; No explosion.	5	Forced Discharge	Discharged to 0.8V at 300mA; And then the sample cell is forced discharged with 300mA for 3 hours.	No explosion; No fire
No.	Item	Measuring Procedure	Criteria																							
1	Open-Circuit Voltage	The open-circuit voltage shall be measured by voltmeter.	≥1.72 V																							
2	Dimension	Use calipers test cell's dimensions.	As item 4.9																							
3	Discharge Capacity	The capacity means the discharge capacity of the cell, which is measured by continuously discharging with a current of 300 mA to 0.8V.	≥1050 mAh																							
4	External Short Circuit	Positive and negative of fresh battery are connected by a Cu wire. This short-circuit condition is continued for 1 day at room temperature (20±2°C).	No leakage; No explosion.																							
5	Forced Discharge	Discharged to 0.8V at 300mA; And then the sample cell is forced discharged with 300mA for 3 hours.	No explosion; No fire																							

	<p>Pila Litio-Ferro "AAA" Art. 30/26150-00 - Art. 30/26155-00 Product Specification</p>	<p>Page 4 of 7</p>
---	--	--------------------

5.4 Mechanical Characteristics

No.	Item	Test Method	Criteria
1	Impact	A 15.8 mm diameter bar is vertically placed across the centre of the sample cell. A 9.1 kg mass is dropped from a height of 61cm onto the sample.	No explosion, No fire
2	Vibration	Freq: 10~55hz; Amp: 2mm; Three directions; total 90 min	No leakage, No explosion, no fire 0.02V total maximum OV changes
3	Crush	A sample cell is to be crushed between two flat surfaces. Force: 32mm diameter piston; Max pressure: 17.2MPa; Max force: 13KN; Released when the max pressure obtained.	No explosion, No fire

5.5 Environmental test

No.	Item	Test Conditions	Criteria
1	Thermal test	Fresh batteries, store at 70 deg. C for 4hs; 20 deg. C for 2hs; -20 deg. C for 4hs; 20 deg. C for 2hs. All cycled 5 times	No leakage No explosion; No fire
2	Heating test	Fresh battery is heated in an oven. The rate of temperature raised: 5±2°C per minute; Max. temperature 150±2°C remaining for 10 minutes.	No explosion; No fire
3	Drop test	Fresh batteries; Height: 1m, 6 times; Each direction two times; Concrete floor	No leakage; No explosion; No fire



Pila Litio-Ferro "AAA"
Art. 30/26150-00 - Art. 30/26155-00
Product Specification


Page 5 of 7

5.6 Visual inspection

There shall be no such defect as scratch, flaw, crack, and leakage, which may adversely affect commercial value of cell.

6. Drawing (unit: mm(inches))

Dimensions in mm (inches)

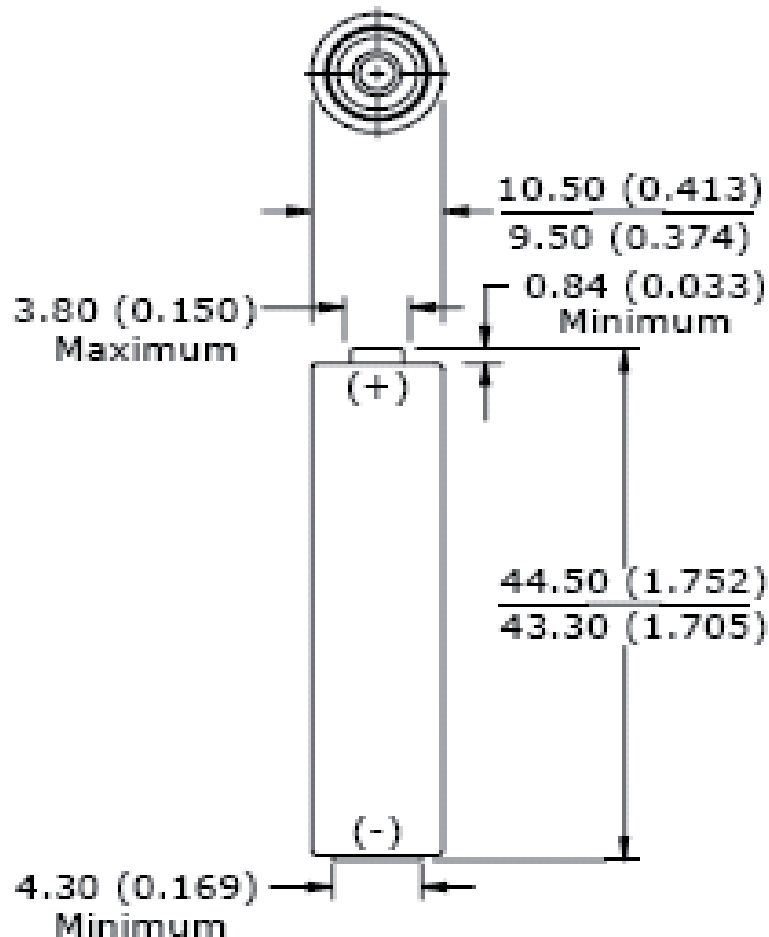


EXTRACELL[®]-e

Pila Litio-Ferro "AAA"
Art. 30/26150-00 - Art. 30/26155-00
Product Specification

Page 6 of 7

7. Discharge curve

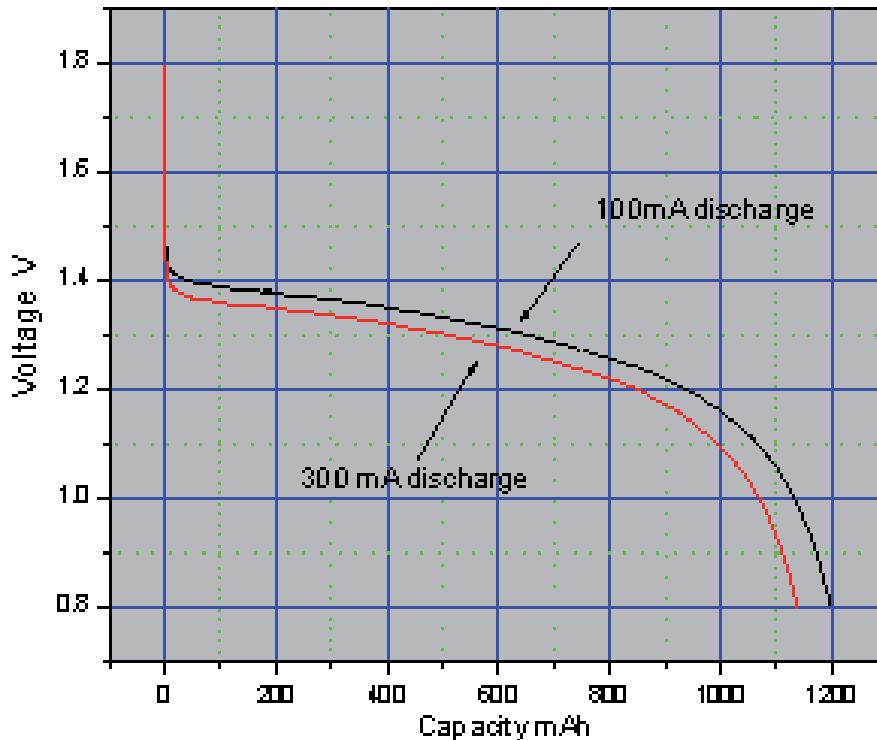

8. Cautions in use


To ensure proper use of the battery please read the manual carefully before using it.

. Handling

- Do not expose to, dispose of the battery in fire.
- Do not put the battery in a charger or equipment with wrong terminals connected.
- Avoid shorting the battery
- Avoid excessive physical shock or vibration.
- Do not disassemble or deform the battery.
- Do not immerse in water.
- Do not use the battery mixed with other different make, type, or model batteries.
- Keep out of the reach of children.

. Storage

- Store the battery in a cool, dry and well-ventilated area.

	<p>Pila Litio-Ferro "AAA" Art. 30/26150-00 - Art. 30/26155-00 Product Specification</p>	<p>Page 7 of 7</p>
<p>. Disposal</p> <ul style="list-style-type: none">▪ Regulations vary for different countries.▪ Dispose of in accordance with local regulations. <p>9. Battery operation instruction</p> <p>9.1 Discharging current</p> <p>The discharging current does not have to surpass this specification book stipulation the biggest discharging current, the oversized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.</p> <p>9.2 Electric discharge temperature</p> <p>The battery discharge must carry on in the ambient temperature scope which this specification book stipulated.</p> <p>9.3 Storing the Batteries</p> <p>The battery should store in the product specification book stipulation temperature range. If has surpasses above for six months the long time storage, the discharge capacity will decrease sharply.</p> <p>10. Period of Warranty</p> <p>The period of warranty is one year from the date of shipment. Elcart Distribution SpA guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customers' abuse and misuse.</p> <p>11. Other Chemical Reaction</p> <p>Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as discharge, ambient temperature, are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. Please change the battery in time.</p> <p>12. Note</p> <p>Any other items which are not covered in this specification shall be agreed by both parties.</p>		