



## NVENT CADDY EZ RISER, 5" TUBO

### CATALOG NUMBER

**EZR0500**



### CERTIFICATIONS



### FEATURES

One-piece hinge design comes out of the box ready to install

Lack of loose hardware eliminates dropped or lost components, eliminating potential rework and speeding up installation

Carriage bolts seat into clamp, eliminating the need for multiples tools when tightening

Installs up to 60% faster than standard riser clamps and 45% faster than the industry-leading first generation EZ Riser

Multi-functional clamp can be installed in several approved orientations, simplifying material handling

Integrated second set of bolt holes allow the assembly to easily adapt from a riser clamp into a stand-off support

In spaces where full-sized riser clamps do not fit, integrated score marks allow for easy removal of ears

Retains listing when the ears are removed for close quarters, uniquely making the nVent CADDY EZ Riser capable of a listing in both installations

Recommended for suspending vertical steel pipe risers

No need to stock and use separate part families for standard and close quarter clamps to offer a full range of listed parts, reducing inventory by 38%

Conforms with Federal Specification WW-H-171 (Type 8), Manufacturers Standardization Society (MSS) SP-58 (Type 8)

## CARATTERISTICHE DEL PRODOTTO

---

Article Number: 179235

Material: Acciaio

Finish: Elettrozincato

Pipe Size: 5"

Outer Diameter (OD): 141,3 mm

Hole Size (HS): 13,2 mm

A: 368,3 mm

B: 298,5 mm

C: 38,1 mm

Static Load (F): 5200N

## ADDITIONAL PRODUCT DETAILS


---

Clamp is fitted for steel pipe and should be installed below a coupling or shear lug, with bolts torqued to recommended value.

Use of a socket or driver is recommended for installation.

## DIAGRAMS

---

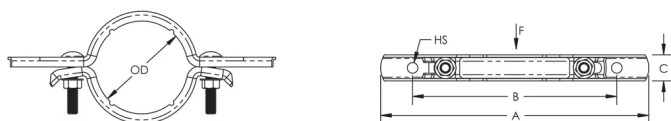

## AVVERTENZA

---

AVVERTENZA: i prodotti nVent devono essere installati e usati solo secondo le indicazioni riportate nei fogli delle istruzioni del prodotto nVent e nei materiali di formazione. I fogli di istruzioni sono disponibili sul sito [www.nvent.com](http://www.nvent.com) e presso il vostro rappresentante locale dell'assistenza clienti di nVent. Un'installazione scorretta, l'uso improprio, l'applicazione errata o altre inosservanze delle istruzioni e delle avvertenze di nVent possono causare un malfunzionamento del prodotto, danni alle proprietà, lesioni corporee gravi e morte e/o l'annullamento della garanzia.

**America del Nord**

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

**Europa**

Netherlands:

+31 800-0200135

France:

+33 800 901 793

**Europa**

Germany:

800 1890272

Other Countries:

+31 13 5835404

**APAC**

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:  
**nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF**  
**TRACER**