



URBAN LANTERN

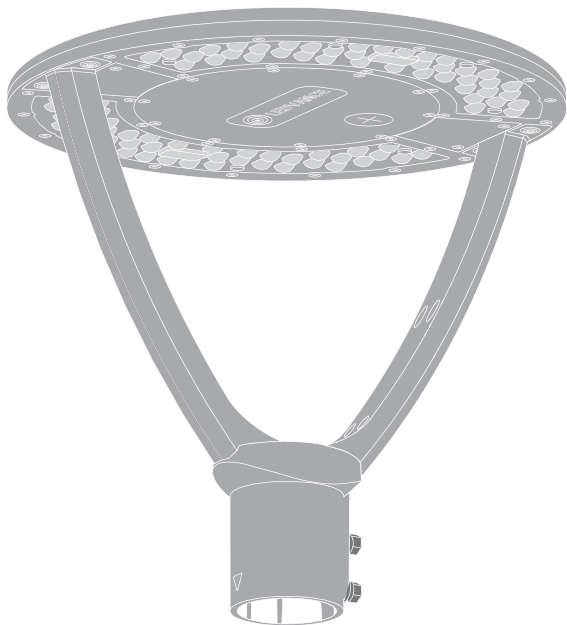

	EAN	Ø x h [mm]	W	VAC	Hz	lm	lm/W	K
URBAN LANTERN V 29W SYM PS 822-827 IP66 GY	4099854287626	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W SYM PS 822-827 IP66 BK	4099854287633	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W ASYM PS 822-827 IP66 GY	4099854287640	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W ASYM PS 822-827 IP66 BK	4099854287657	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W SYM PS 822-827 IP66 GY	4099854287664	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W SYM PS 822-827 IP66 BK	4099854287671	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W ASYM PS 822-827 IP66 GY	4099854287688	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W ASYM PS 822-827 IP66 BK	4099854287695	395 x417	*	220-250	50/60	*	*	*

W _{AC}	15		20		25		29		34		42		49		59	
T _i [Kelvin]	2200	2700	2200	2700	2200	2700	2200	2700	2200	2700	2200	2700	2200	2700	2200	2700
lm/W	107	122	107	122	107	122	107	122	110	125	110	125	110	125	110	125
lm	1605	1830	2140	2440	2675	3050	3103	3538	3740	4250	4620	5250	5390	6125	6490	7375






URBAN LANTERN







	EAN	Ø x h [mm]	W	VAC	Hz	lm	lm/W	K
URBAN LANTERN V 29W SYM PS 830-840 IP66 GY	4099854246838	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W SYM PS 830-840 IP66 BK	4099854246845	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W ASYM PS 830-840 IP66 GY	4099854246852	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 29W ASYM PS 830-840 IP66 BK	4099854246784	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W SYM PS 830-840 IP66 GY	4099854246791	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W SYM PS 830-840 IP66 BK	4099854246807	395 x417	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W ASYM PS 830-840 IP66 GY	4099854246814	395 x416.8	*	220-250	50/60	*	*	*
URBAN LANTERN V 59W ASYM PS 830-840 IP66 BK	4099854246821	395 x416.8	*	220-250	50/60	*	*	*





W _{AC}	15		20		25		29		34		42		49		59	
T _l [Kelvin]	3000	4000	3000	4000	3000	4000	3000	4000	3000	4000	3000	4000	3000	4000	3000	4000
lm/W	130	136	130	136	130	136	130	136	133	139	133	139	133	139	133	139
lm	1950	2040	2600	2720	3250	3400	3770	3945	4520	4730	5600	5840	6520	6800	7850	8200

	EAN	IP	IK	∇	R _a	°(°C)	PF	👤
URBAN LANTERN V 29W SYM PS 822-827 IP66 GY	4099854287626	66	10	145°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W SYM PS 822-827 IP66 BK	4099854287633	66	10	145°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W ASYM PS 822-827 IP66 GY	4099854287640	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W ASYM PS 822-827 IP66 BK	4099854287657	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 59W SYM PS 822-827 IP66 GY	4099854287664	66	10	145°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W SYM PS 822-827 IP66 BK	4099854287671	66	10	145°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W ASYM PS 822-827 IP66 GY	4099854287688	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W ASYM PS 822-827 IP66 BK	4099854287695	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 29W SYM PS 830-840 IP66 GY	4099854246838	66	10	145°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W SYM PS 830-840 IP66 BK	4099854246845	66	10	145°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W ASYM PS 830-840 IP66 GY	4099854246852	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 29W ASYM PS 830-840 IP66 BK	4099854246784	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,2 kg
URBAN LANTERN V 59W SYM PS 830-840 IP66 GY	4099854246791	66	10	145°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W SYM PS 830-840 IP66 BK	4099854246807	66	10	145°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W ASYM PS 830-840 IP66 GY	4099854246814	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,3 kg
URBAN LANTERN V 59W ASYM PS 830-840 IP66 BK	4099854246821	66	10	165° x 65°	>80	-30°...+50°	>0.9	4,3 kg

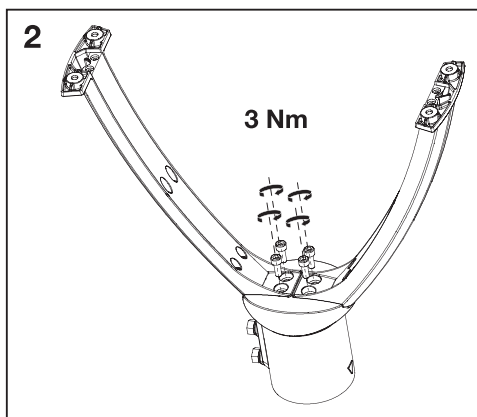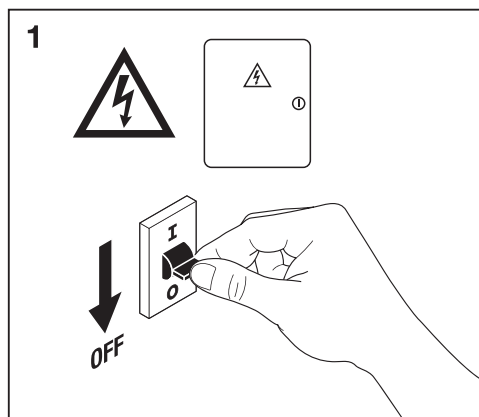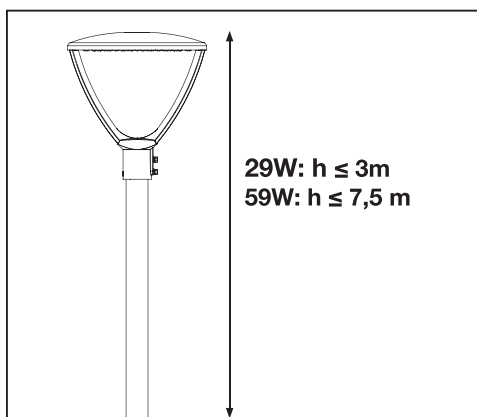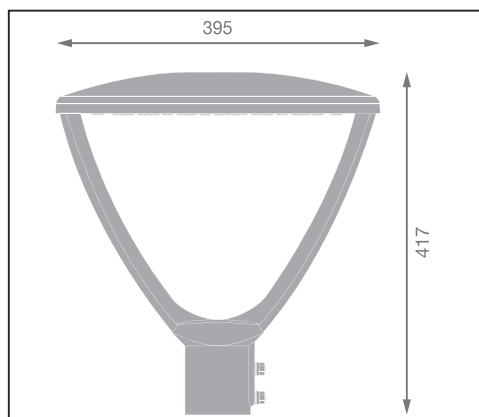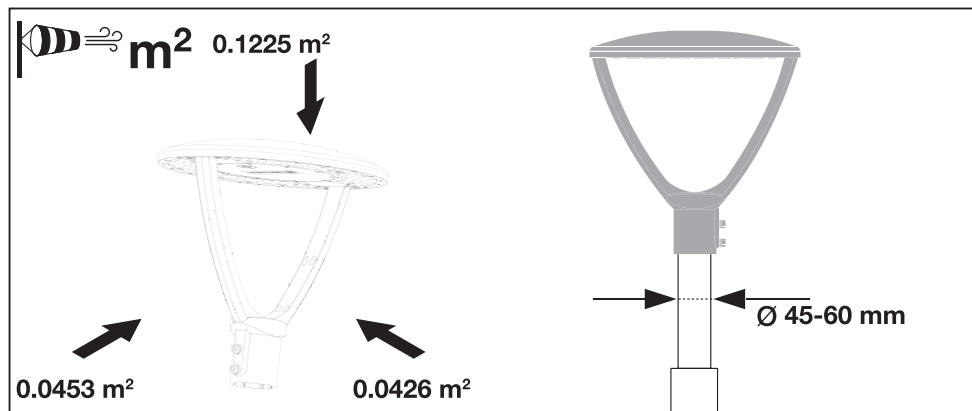

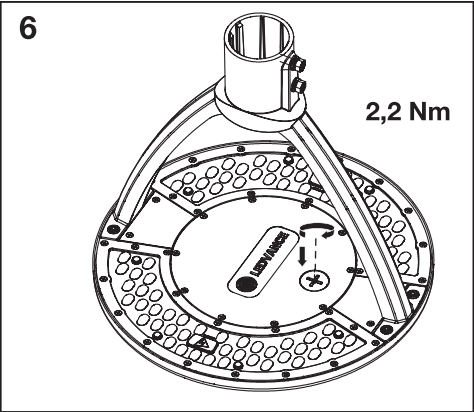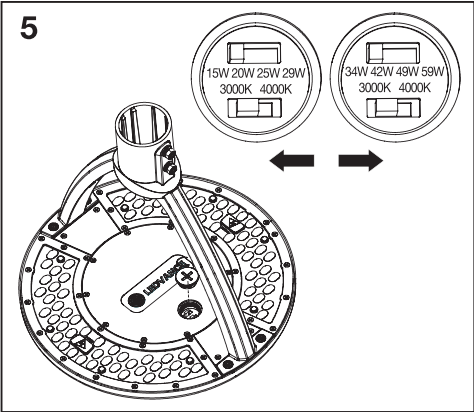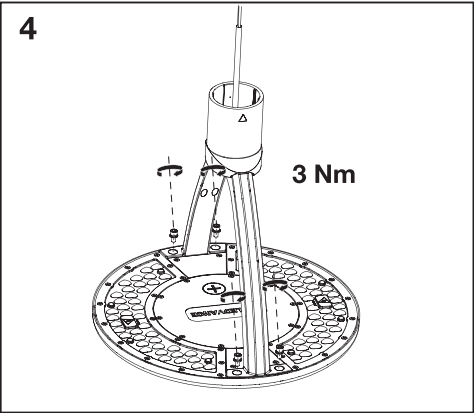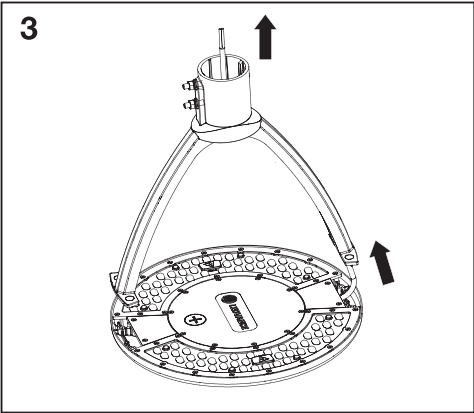

	Inrush current [A]	Th50 [µs]	B10	B16	B32	C10	C16	C32
URBAN LANTERN V 29W SYM PS 822-827 IP66 GY	25,8	330	6	8	17	8	13	27
URBAN LANTERN V 29W SYM PS 822-827 IP66 BK	25,8	330	6	8	17	8	13	27
URBAN LANTERN V 29W ASYM PS 822-827 IP66 GY	25,8	330	6	8	17	8	13	27
URBAN LANTERN V 29W ASYM PS 822-827 IP66 BK	25,8	330	6	8	17	8	13	27
URBAN LANTERN V 59W SYM PS 822-827 IP66 GY	30,6	300	5	7	14	7	11	23
URBAN LANTERN V 59W SYM PS 822-827 IP66 BK	30,6	300	5	7	14	7	11	23
URBAN LANTERN V 59W ASYM PS 822-827 IP66 GY	30,6	300	5	7	14	7	11	23
URBAN LANTERN V 59W ASYM PS 822-827 IP66 BK	30,6	300	5	7	14	7	11	23

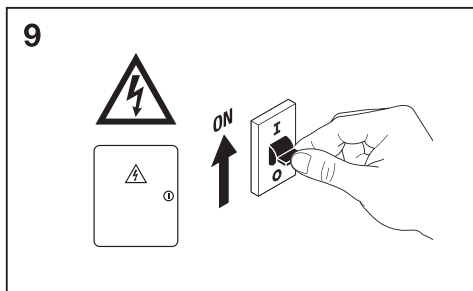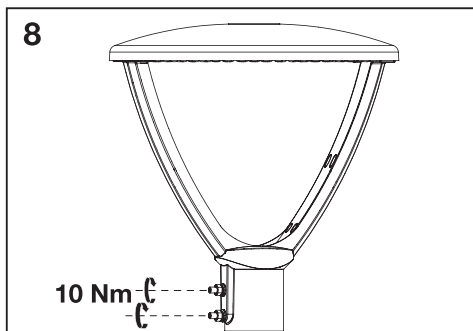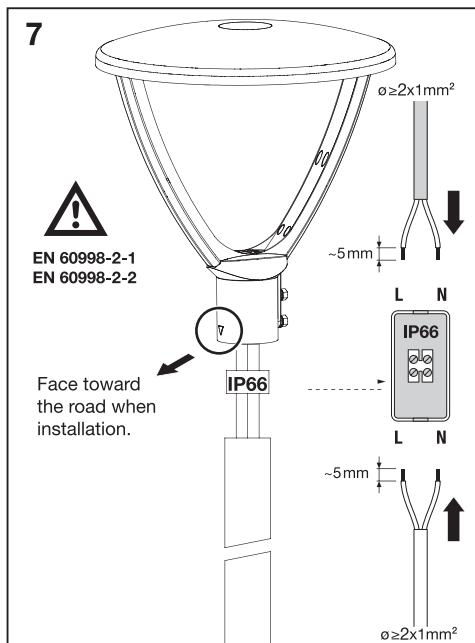

Points de collecte sur www.quefairedemesdechets.fr



C10449057
G11224890

19.01.25

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

® LEDVANCE Ltd, Sterling House, 810
Mandarin Court, Warrington, Cheshire,
WA1 1GG, United Kingdom