

Systeme | 198-264 V AC /198-278 V DC | 240 topLED 36 W DC - 40 W AC | Modular | CRI
92 | + 65212
65507N

Single emission systems for indoor application. The natural white LED light source is composed of 240 topLEDs with CCT of 4000 K and a CRI 92; the source luminous flux is 5308 lm, with a 147.4 lm/W nominal luminous efficacy.



The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 3.1 kg.

The total absorbed power is 40 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

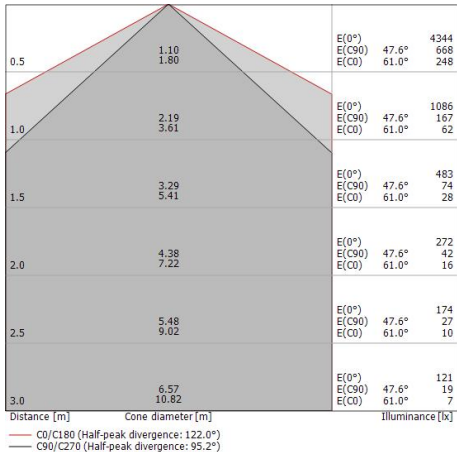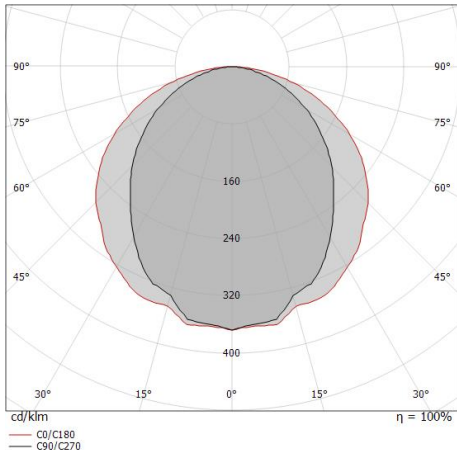

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	55 %
Lichtstrom (Lichtquelle)	5308 lm
Leuchten Lichtstrom	2954 lm
Consumption	40 W
Leuchten Lichtausbeute	73 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	92 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)

L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR

UGR axial	24.1
UGR transversal	27
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	95°
Optik C0/C180	122°
Light distribution simmetry	Symmetrical 2 assis

Rollip35_MS | Systems | Accessories
65507N

 	Diffusor - Opal 5m Länge Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 65212
 	Diffusor - Opal 10m Länge Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 65213
 	Diffusor - Opal 20m Länge Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 65214
 	Diffusor - Opaline diffuser L.50mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 65215
 	Diffusor - Asymmetric diffuser L.5mt	Code 65234
 	Diffusor - Asymmetric diffuser L.10mt	Code 65235
 	Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code 64005
 	Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code 64015

Rollip35_MS | Systems | Accessories
65507N




Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

Code
64025



Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

Code
64035



Endkappe - Kit end caps Rollip35_MP - White
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text white RAL9003, bearbeitungstyp
:Pulverbeschichtung mit duroplastischen Pulvern.

Code
64634