



### Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage $U_i$ IEC/EN	V	690
Rated impulse withstand voltage $U_{imp}$	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current $I_{th} \leq 40^\circ C$	A	10
Protection fuse	gG (IEC)	A 16
	Tightening torque for terminals	min Nm 0.8
	max Nm 1	
	min lbin 9	
	max lbin 9	
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	lbin 9
	max	lbin 9
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	max 12
	Flexible w/o lug conductor section	min
max		mm <sup>2</sup> 2.5
Flexible c/w lug conductor section	min	mm <sup>2</sup> 1.5
	max	mm <sup>2</sup> 2.5
Flexible with insulated spade lug conductor section	min	mm <sup>2</sup> 1.5
	max	mm <sup>2</sup> 2.5
Power terminal protection according to IEC/EN 60529		IP20 when properly wired

### Mechanical features

Operating position	normal allowable	Vertical plan $\pm 30^\circ$
Fixing		Screw / DIN rail 35mm
Weight	g	180

### Auxiliary contact characteristics

Thermal current $I_{th}$	A	10
IEC/EN 60947-5-1 designation		A600 - Q600

Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
	Operating current DC13		
	24V	A	2.9
	48V	A	1.4
	60V	A	1.2
	110V	A	0.6
	125V	A	0.55
	220V	A	0.3
	600V	A	0.1

**Operations**

Mechanical life	cycles	20000000
-----------------	--------	----------

**Safety related data**

Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000
--	-----------------	--------	----------

EMC compatibility	yes
-------------------	-----

**AC coil operating**

Rated AC voltage at 60Hz	V	48
--------------------------	---	----

AC operating voltage	of 60Hz coil powered at 60Hz	pick-up	min	%Us	75
			max	%Us	115
	drop-out	min	%Us	20	
		max	%Us	55	

AC average coil consumption at 20°C	of 50/60Hz coil powered at 50Hz	in-rush	VA	30	
		holding	VA	4	
		of 50/60Hz coil powered at 60Hz	in-rush	VA	25
		holding	VA	3	
	of 60Hz coil powered at 60Hz	in-rush	VA	30	
		holding	VA	4	

Dissipation at holding ≤20°C 50Hz	W	0.95
-----------------------------------	---	------

**Max cycles frequency**

Mechanical operation	cycles/h	3600
----------------------	----------	------

**Operating times**

Average time for Us control in AC	Closing NO	min	ms	12
		max	ms	21
	Opening NO	min	ms	9
		max	ms	18
	Closing NC	min	ms	17

	Opening NC	max	ms	26
		min	ms	7
		max	ms	17
<hr/>				
in DC	Closing NO	min	ms	18
		max	ms	25
	Opening NO	min	ms	2
		max	ms	3
	Closing NC	min	ms	3
		max	ms	5
	Opening NC	min	ms	11
		max	ms	17

**UL technical data**

Rated operational voltage AC (UL)	V	600
General USE		

Contactor

AC current A 10

Contact rating of auxiliary contacts according to UL A600 - Q600

**Ambient conditions**

Temperature

Operating temperature

min °C -50  
max °C +70

Storage temperature

min °C -60  
max °C +80

Max altitude


m 3000

**Resistance & Protection**


Pollution degree

3

**Dimensions**

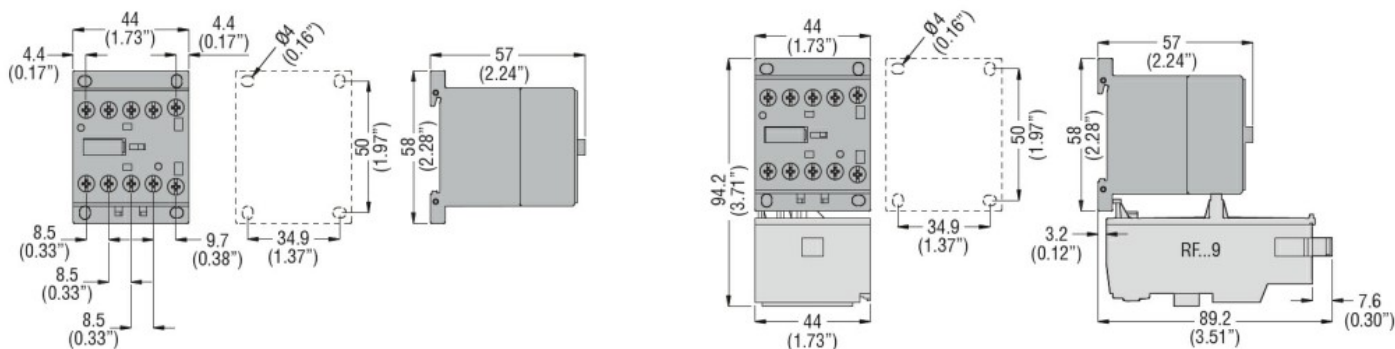

**Wiring diagrams**

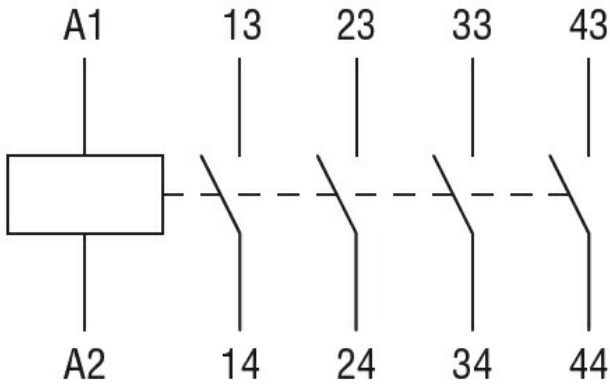

**Certifications and compliance**

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

**ETIM classification**

ETIM 8.0

EC000196 -  
 Contactor relay