



Contact characteristics

Contact configuration	2 C/O		
Rated insulation voltage U_i IEC/EN	V	250	
Rated impulse withstand voltage U_{imp}	kV	6	
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	8	
Maximum instantaneous current	A	20	
Rated current (I_n)	A	8	
Max contrrollable power in	AC-1	W	2000
	AC-15	VA	150
Rated operating power AC-1	VA	2000	
Rated operating power AC-15	230 VAC	VA	150
Single-phase motor control	230VAC	kW	0.2
Rated operating current DC-1	30V	A	8
	110V	A	0.3
	220V	A	0.1
Minimum switching load	V / mA	5 / 100	
Contact impedance	m Ω	100	
Contact material	AgSnO2		

Operating times

Closing	ms	10
Opening	ms	5

Operations

Mechanical life	cycles	10000000
Electrical life AC1	cycles	50000

Coil characteristics

Relay control voltage	V	230VAC
Average coil consumption AC at 20°C	VA	0.9
Average coil consumption DC at 20°C	W	0.45

Operating range

	Closing	% U_n	70...110
	Opening	% U_n	20...55
Maximum cycle frequency	cycles/h	3600	

Mechanical features

Max socket terminal tightening torque	Nm	0.6
Socket screw tightening tool (cross / flat blade)	PH1 / 4.5mm	
Conductor section		
	AWG/Kcmil	
	min	20
	max	14
IEC		

	min	mm ²	0.5
	max	mm ²	2.5

Operating position	normal	Any
--------------------	--------	-----

Fixing	On 35mm DIN rail and with screw	
--------	---------------------------------	--


Ambient conditions

Temperature			
Operating temperature			
	min	°C	-40
	max	°C	+85
Storage temperature			
	min	°C	-40
	max	°C	+85


Other features

Indication	No
Mechanical contact position indicator	No
Mechanical test actuator	No


Dimensions

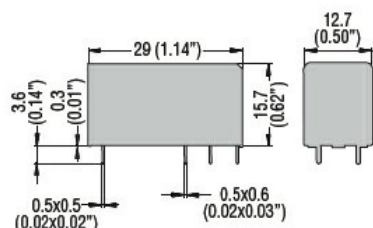

PCB layout



Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

VDE

ETIM classification

ETIM 8.0

EC001437 -
Switching relay