



8-PIN
INDUSTRIAL
RELAYS
HR702C

Product designation

Product type designation

Contact characteristics

Contact configuration			2 C/O
Rated insulation voltage U_i IEC/EN	V	250	
Rated impulse withstand voltage U_{imp}	kV	6	
IEC Conventional free air thermal current I_{th}	A	10	
Rated current (I_n)	A	10	
Relay control voltage	V	110VAC	
Rated operating power AC-1	VA	2500	
Rated operating power AC-15	230 VAC	VA	500
Single-phase motor control	230VAC	kW	1.2
Rated operating current DC-1	30V	A	10
Minimum switching load	V / mA	5 / 100	
Contact impedance	mΩ	100	
Contact material	Ag/Ni		

Operating times

Closing	ms	<30	
Opening	ms	<30	

Operations

Mechanical life	cycles	5000000	
Electrical life AC1	cycles	100000	

Coil characteristics

Average coil consumption AC at 20°C	VA	3	
Average coil consumption DC at 20°C	W	1.5	

Operating range

Maximum cycle frequency	Closing	% U_n	70...110
	Opening	% U_n	20...55
		cycles/h	3600

Mechanical features

Max socket terminal tightening torque	Nm	0.6
Socket screw tightening tool (cross / flat blade)	PH1 / 4.5mm	

Conductor section

AWG/Kcmil

min	20	
max	14	

IEC

min	mm ²	0.5
max	mm ²	2.5

Operating position

normal

Any

Fixing

On 35mm DIN
rail and with
screw

Ambient conditions

Temperature

Operating temperature

min	°C	-40
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Other features

Indication

Yes


Mechanical contact position indicator

Yes


Mechanical test actuator

Yes

Dimensions

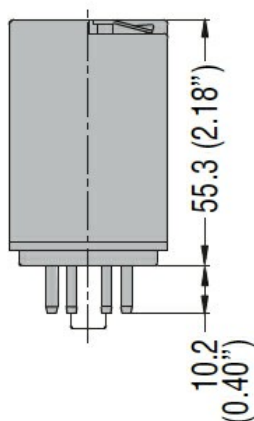

Wiring diagrams

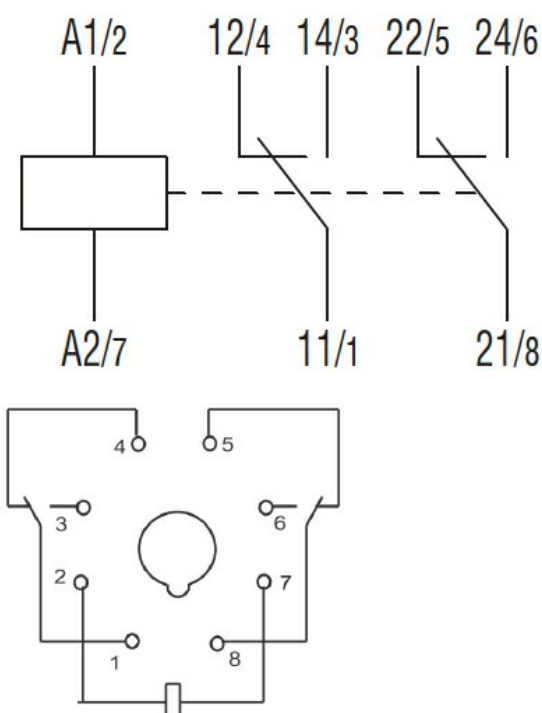

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001437 -
Switching relay