


TX6A™ Category 6A Shielded F/FTP Copper Cable – Europe

PANDUIT™

SPECIFICATION SHEET

specifications

Category 6A cable shall be constructed of 23 AWG copper conductors with SFS-PO insulation. The copper conductors shall be twisted in pairs, with each pair covered in foil. All four pairs shall be surrounded by an overall metallic foil shield within a LSFRZH jacket.



TX6A™ Shielded Copper Cabling System – Europe

TX6A™ Shielded Copper Cable – F/FTP – Europe

LSFRZH: PFFY6X04*-HED

*To designate cable color, add suffix WH (White). For additional cable colors, contact customer service.

technical information

Electrical performance: Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ISO 11801 Class Ea and ANSI/TIA-568.2-D Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ Shielded Copper Cabling System

Certified component performance up to 100 meters and exceeds the component requirement of the IEC 61156-5 and ANSI/TIA-568.2-D Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems

Conductors/insulators: 23 AWG solid copper insulated with SFS-PO

Insulation diameter: 1.27-1.30mm (0.050-0.051inch)

Flame rating: EN 50575: EuroClass Cca-s1a,d0,a1
Note that the d0 classification applies only to product manufactured on or after October 12, 2020. Product manufactured prior has the d1 classification.

PoE compliance: Meets IEEE 802.3af, IEEE 802.3at and 802.3bt for PoE applications

Installation tension: 110 N (25 lbf)

Temperature rating: 0°C to 50°C (32°F to 122°F) during installation
-20°C to 75°C (-4°F to 167°F) during operation

Cable jacket: LSFRZH

Cable diameter: 7.3mm (0.287 in.) nominal

Cable weight: 27kg/500m (60 lbs./1640ft)

Packaging: 500m (1640 ft.) on a reel
Packaged tested to ISTA Procedure 1A

key features and benefits

Foiled individual pairs: Shielded pairs for exceptional cable performance

Overall foil shield: Provides superior structural integrity and reduces low interference, including alien crosstalk to ensure exceptional cable performance at all swept frequencies up to 500 MHz

Internal drain wire: Facilitates means of grounding the cable and provides for efficient performance and protection of network investment

Descending length cable markings: Easy identification of remaining cable reduces installation time and cable scrap

Bulk packaging: 500m (1640 ft.) supplied on a reel for ease of installation

applications

TX6A™ Shielded Copper Cable is a component of the Panduit® TX6A™ Shielded Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The shielded cabling system provides high performance, excellent EMI suppression, and aids in secure data transmission. The Panduit solution helps ensure organizations

efficiently and reliably meet their data transmission needs. Usage of the TX6A™ Shielded Copper Cabling System include high bandwidth applications within data centers and connections to high-end workstations such as:


- 10GBASE-T Ethernet
- Data Center applications
- Virtual business management applications

TX6A™ Category 6A Shielded F/FTP Copper Cable – Europe

additional specifications

Mechanical Test	
Ultimate Breaking Strength	> 400 N (90 lbf)
Minimum Bend Radius	8 x Cable Diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	76% nominal
Operating Voltage, Maximum	80 V

cable construction

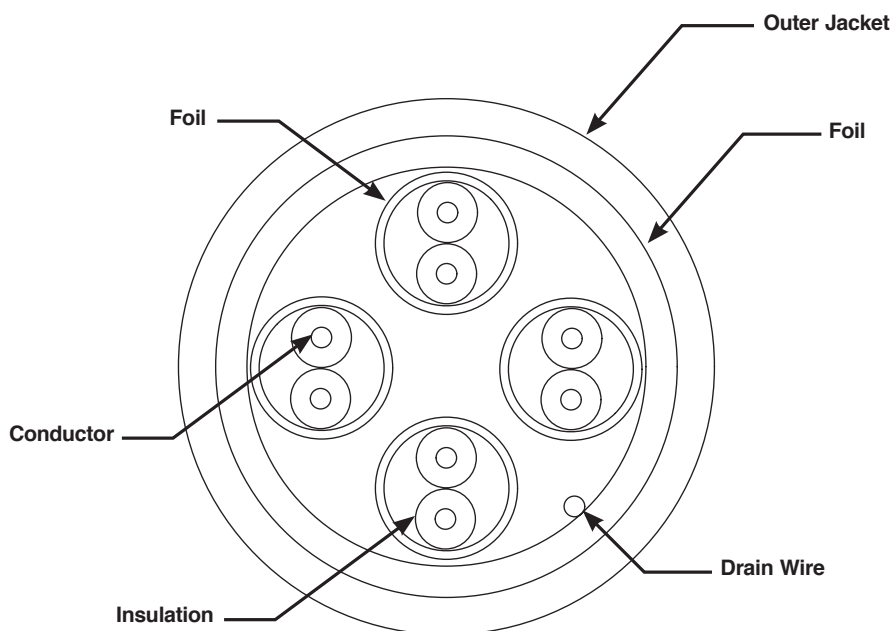

Dimensions are in inches. [Dimensions in brackets are metric.]

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT™

©2021 Panduit Corp.
ALL RIGHTS RESERVED.
COSP516--WW-UKE
5/2021