


# 1TCTB090

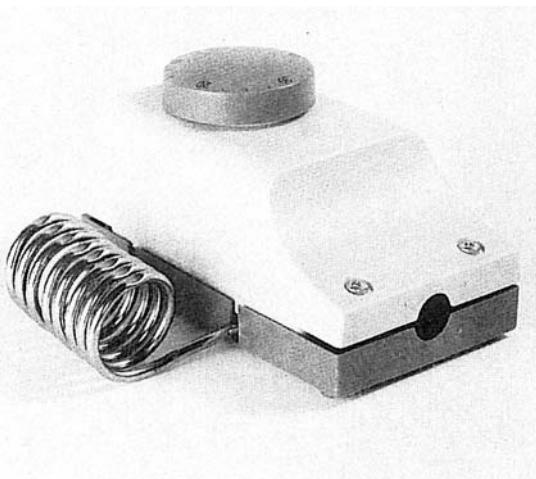

#### SCHEMA ELETTRICO ELECTRICAL DIAGRAM

VERSIONE CONTATTI IN  
COMMUTAZIONE DT

DOUBLE THROUGH  
VERSION DT



#### CARATTERISTICHE ELETTRICHE SWITCH RATING

RESISTIVO	{ 16A	250V
RESISTIVE	{ 10A	400V
INDUTTIVO	{ 5A	250V
INDUCTIVE	{ 1A	400V

TERMINALI FASTON 6,3 mm  
TAB TYPE 1/4 FASTON

SCALA TEMPERATURA TEMPERATURE RANGE	MAX TEMPERATURA AMMESSA SUL TERMOSTATO MAX WORKING TEMPERATURE ON THE THERMOSTAT	MAX TEMPERATURA AMMESSA SUL BULBO MAX WORKING TEMPERATURE ON THE BULB
4°-40°C	T 80	44°C

#### TERMOSTATO AMBIENTE

#### Scala temperatura: 4°-40°C

Questo termostato viene impiegato per il controllo della temperatura di serre, incubatrici e ovunque si voglia regolare e controllare la temperatura dell' ambiente, fino a 40°C max.

E' dotato di uno speciale sensore a spirale per una maggiore sensibilità alle variazioni della temperatura ambiente.

#### ROOM TEMPERATURE CONTROL THERMOSTAT

#### Temperature range : 4°-40°C

This thermostat is normally installed to control the room temperature up to 40°C max. on green-houses, hatchers, and everywhere it is necessary to control the temperature up to 40°C.

It is made with a special spiral sensor to get a better sensibility on temperature variation.