


SIRIOtape 19W/m SUPERBRIGHT IP67

5601993067



Lamp Voltage

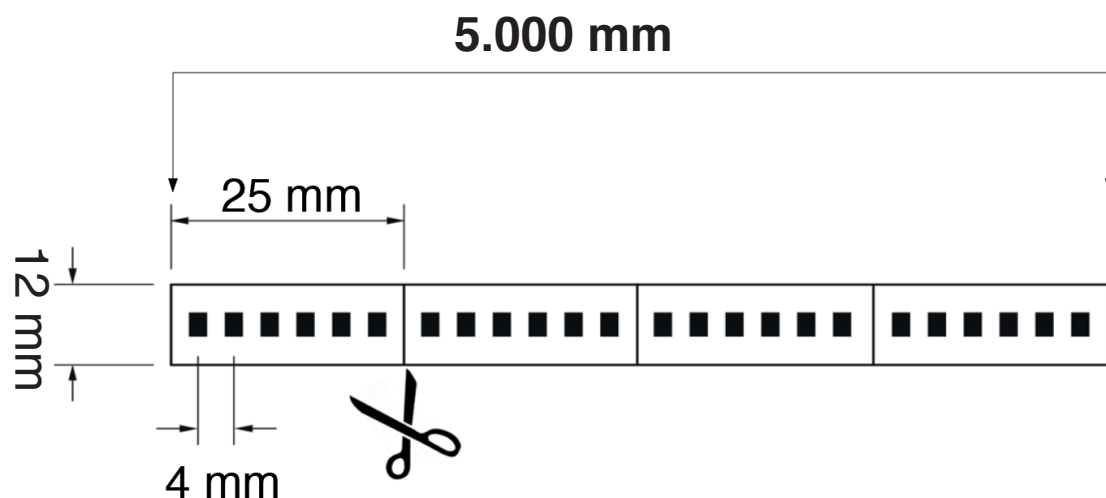

Luminous flux



Max.module lenght





CRI



Degree of protection

DESCRIZIONE

SIRIOtape 19W/m 24V 930 superbright CRI>90, LED 2835
IP67 protection.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 19W/m SUPERBRIGHT IP67

5601993067



MECHANICAL DATA

Width (mm)	12
Height (mm)	3,5
Lenght (mm)	5.000
Degree of protection (IP)	IP67
Lenght of particular segments (mm)	25

ELECTRICAL DATA

Efficiency (lm/W)	63
Lamp power per meter (W)	19
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1200
Beam angle (°)	120
Binning tolerance	-
CRI (Ra)	>85
Colour temperature (K)	3000K
EEC	A
Number Led/M	240

CONNECTION

Connection number	1 (supply from ends or in the middle every 5 meters)
Max, module lenght (mm)	5 .000

TEMPERATURE DATA

Lifetime (h)	45000
Ambient temperature (°C)	-20...+35



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 19W/m SUPERBRIGHT IP67

5601993067



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it