


SIRIOtape 14W/m RGB IP65 24V superbright

5606002

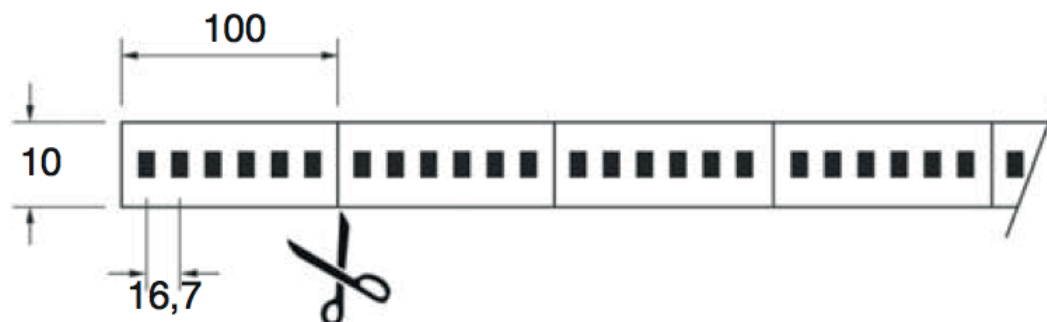

24
V

Lamp Voltage

600
lm/m

Luminous flux

5
m

Max.module lenght

RGB

Colour

IP
65

Degree of protection

DESCRIZIONE

SIRIOtape 14W/m RGB IP65 24V superbright, LED 5050.

IP65 protection.



RGB

IP
65



RoHS



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 14W/m RGB IP65 24V superbright

5606002



MECHANICAL DATA

Width (mm)	10
Height (mm)	2,1
Lenght (mm)	5000
Degree of protection (IP)	IP65
Lenght of particular segments (mm)	100

ELECTRICAL DATA

Efficiency (lm/W)	40
Lamp power per meter (W)	14,4
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	600
Beam angle (°)	120
Led	5050
CRI (Ra)	- - -
Colour temperature (K)	RGB
EEC	A
Number Led/M	60

CONNECTION

Connection number	1 (supply from ends or in the middle every 5 meter)
Max, module lenght (mm)	5 .000

TEMPERATURE DATA

Lifetime (h)	36000
Ambient temperature (°C)	-20...+35



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 14W/m RGB IP65 24V superbright

5606002



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it