


SICOMTape Neon WIDE 19W 3000K IP67 - 5m

563WID193067



Lamp Voltage

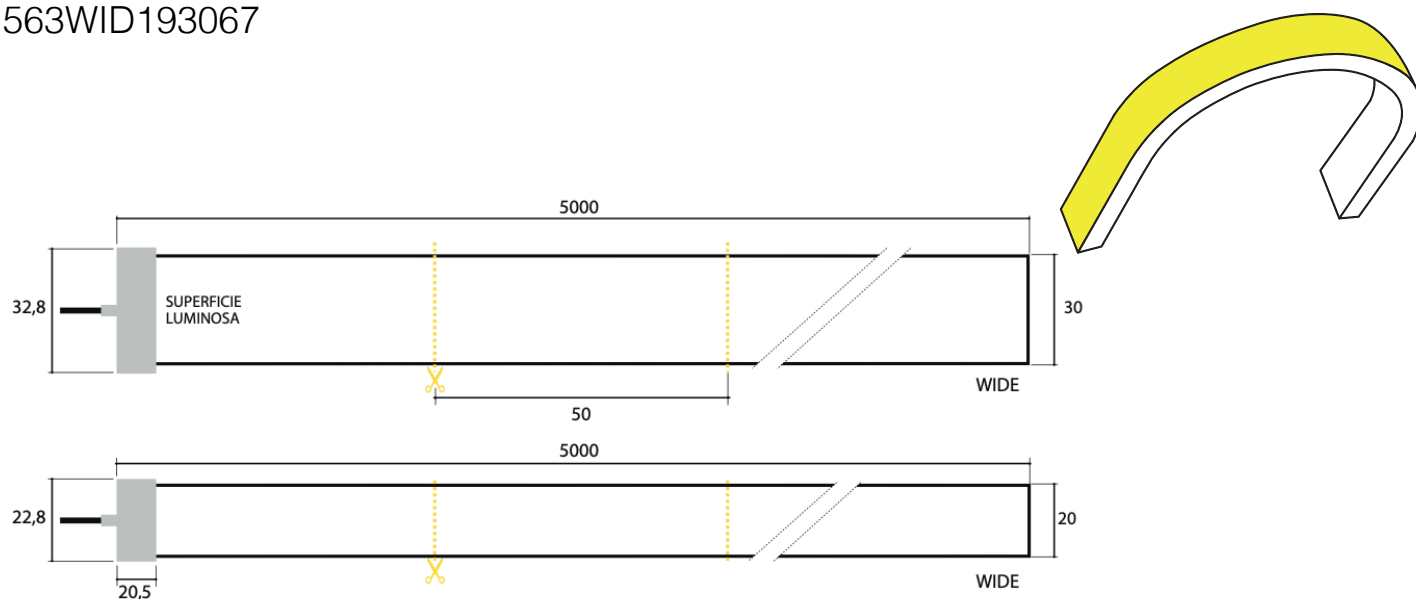

Luminous flux



Max.module lenght



CRI



Bending diameter



DESCRIZIONE

SICOMTape Neon WIDE 19W 3000K IP67 - 5m.

Vertical bending only. Bending radius is 150mm. 1-Side emitting.

IP67 protection, resistant to chemical.

30cm connector from Both Ends.



*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SICOMTape Neon WIDE 19W 3000K IP67 - 5m

563WID193067

MECHANICAL DATA		
Width (mm)	30	
Height (mm)	20	
Lenght (mm)	5000	
Degree of protection (IP)	IP67	
Lenght of particular segments (mm)	50	
ELECTRICAL DATA		
Efficiency (lm/W)	66	
Lamp power per meter (W)	19	
Lamp voltage (V)	24	
Voltage range	23,5 - 24,5 Vdc	
LIGHT TECHNICAL DATA		
Luminous flux (lm/m)	1250	
Beam angle (°)	125	
Binning tolerance	3 SDCM	
CRI (Ra)	90	
Colour temperature (K)	3000	
EEC	A+	
CONNECTION		
Connection number	2	
Cable cross-section (mm²)	0,5	
Max, module lenght (mm)	5000	
TEMPERATURE DATA		
Lifetime (h)	45000	
Ambient temperature (°C)	-25...+45	
Storage temperature (°C)	-25...+60	
Operating temperature (°C)	-25...+65	



SICOMTape Neon WIDE 19W 2700K IP67 - 5m

563WID192767

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of $\pm 10\%$ (or $\pm 15\%$ at ECO/TWO/RGB/AIR).
Module lenght at 24V input voltage at the module and luminous flux drop 10% over the specified lenght.

INCLUDED ACCESSORIES

SICOMtape Neon WIDE


End caps - Fixing screw - Mounting brackets



NOT INCLUDED ACCESSORIES

SICOMtape Neon WIDE

L x B x H (mm)



563WID1000 SICOMTape Neon WIDE IP67 profilo

1000 x 32 x 20

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commisioning.

For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it