SIEMENS

Foglio dati 3VA9877-0GX32



modulo di contatti ausiliari comando rotativo 2 blocchetti di contatti ausiliari, da OFF a ON accessori per: 3VA57/58/59 3VA67/68/69

Versione	
marca del prodotto	SENTRON
denominazione del prodotto	modulo blocchetti di contatti ausiliari
accessori	modulo blocchetti di contatti ausiliari
Dati tecnici generali	
grado di inquinamento	3
categoria di sovratensione	III
Tensione	
tensione di tenuta a impulso	4 kV
tensione di impiego / con AC / secondo CSA e UL	230 V
tensione di impiego / con DC / secondo CSA e UL	24 V
tensione di impiego / con AC / a 50 Hz / valore nominale / min.	230 V
tensione di impiego / con DC / valore nominale / min.	250 V
Elettricità	
corrente termica	5 A
corrente di impiego	
● con AC-12 / con 12 V	5 A
● con AC-12 / con 24 V	5 A
● con AC-12 / con 48 V	5 A
● con AC-12 / con 125 V	5 A
● con AC-12 / a 220/240 V	5 A
● con DC-13 / con 12 V	0,2 A
● con DC-13 / con 24 V	0,2 A
● con DC-13 / con 48 V	0,2 A
● con DC-13 / con 110 V	0,2 A
● con DC-13 / con 250 V	0,2 A
● con AC-15 / con 12 V	2 A
● con AC-15 / con 24 V	2 A
● con AC-15 / con 48 V	2 A
● con AC-15 / con 125 V	2 A
● con AC-15 / a 220/240 V	2 A
Progettazione meccanica	
Peso netto per UQ	229 g
Connessioni secondo UL	
temperatura ambiente / durante l'esercizio	
● min.	-25 °C
● max.	70 °C
temperatura ambiente / durante l'immagazzinaggio	

Con riserva di modifiche
© Copyright Siemens

● min.	-40 °C
● max.	80 °C

Certificati

General Product Approval

Miscellaneous | Confirmation


EMV	Test Certificates	Maritime application	other		Environment
RCM	Type Test Certific-ates/Test Report	LRS	Miscellaneous	Confirmation	Environmental Con-firmations

Environment

Environmental Con-firmations

Ulteriori informazioni

Informazioni sull'imballaggio
https://support.industry.siemens.com/cs/ww/it/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Cataloghi, Opuscoli,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (sistema di ordinazione Online)
https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3VA9877-0GX32
Service&Support (Manuali, Certificati, Caratteristiche, FAQ, …)
https://support.industry.siemens.com/cs/ww/it/ps/3VA9877-0GX32
Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, …)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9877-0GX32
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications

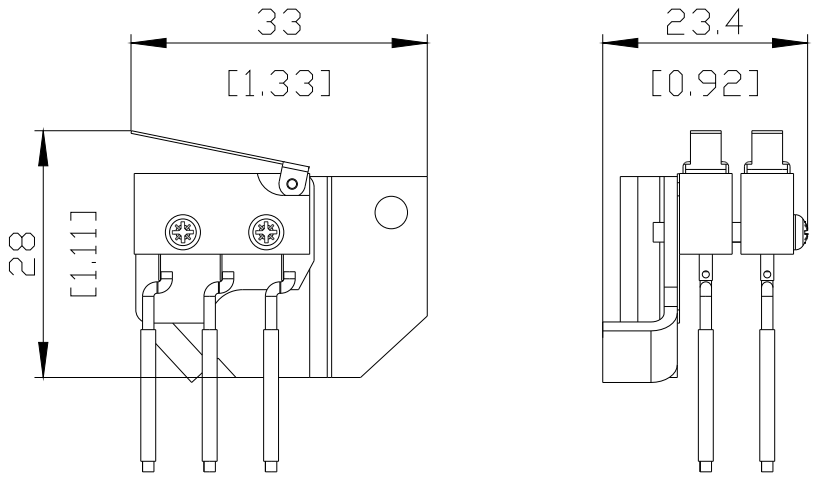

Ultima modifica: 26/05/2025

© Copyright Siemens

© Copyright Siemens