




Colore: ■ nero

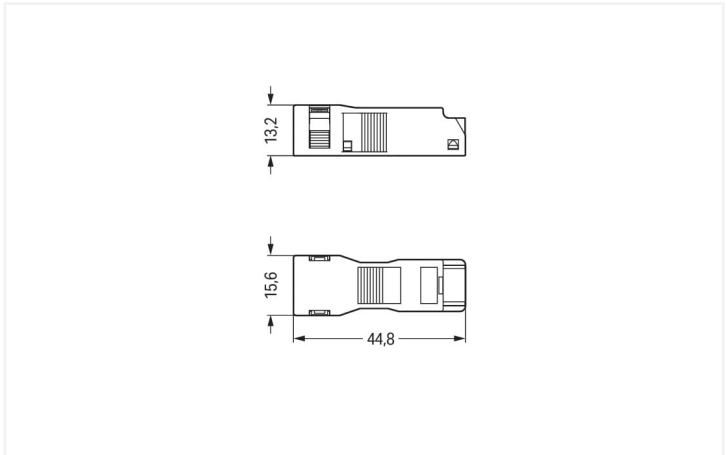

Misure in mm

Strain relief housing *WINSTA®* MINI 2-pole

Choose reliable sustainability for the installation in your project: The strain relief housing from the *WINSTA®* MINI product line. A comprehensive range of accessories complements the *WINSTA®* product line from WAGO. Due to its particularly minimal dimensions, our *WINSTA®* MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very restricted spaces, i.e., for installations when very little room is available. A range up to 32 mm can be used for the strip length.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA®* MINI

The *WINSTA®* Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose durability and quality – the *WINSTA®* MINI accessory from WAGO makes the installation of electrical components substantially easier.

- consistent IP40 protection
- fast, secure installation

Dati di connessione

Connessione 1	
N. poli	2
Diametro del cavo inguainato collegabile	3,8 ... 8,2 mm
Lunghezza spelatura (isolante esterno)	32 mm

Dati geometrici

Larghezza	15,6 mm / 0.614 pollici
Altezza	13,2 mm / 0.52 pollici
Profondità	44,8 mm / 1.764 pollici

Dati dei materiali	
Nota sui dati dei materiali	Information on material specifications can be found here
Colore	nero
Materiale isolante	Poliammide (PA66)
Classe di infiammabilità secondo UL 94	V0
Carico d'incendio	0.134 MJ
Peso	2,9 g

Requisiti ambientali	
Temperatura di lavorazione	-5 ... +40 °C
Temperatura operativa continua	-35 ... +85 °C
Nota sulla temperatura operativa continua	Parti isolanti per temperature ≤ 105 °C

Dati commerciali	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pz.
Tipo imballaggio	Box
Paese d'origine	DE
GTIN	4045454233310
Numero tariffa doganale	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvazioni/certificati	
Omologazioni generali	



Certificazione	Standard	Nome del certificato
cURus Underwriters Laboratories Inc.	UL 1977	E45171

Download
Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 890-502			↓

Documentation			
Bid Text			
890-502	19.02.2019	xml 2.76 KB	↓
890-502	20.11.2014	doc 23.00 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 890-502		EPLAN Data Portal 890-502	↓
		WSCAD Universe 890-502	↓
		ZUKEN Portal 890-502	↓