

_I TI	HIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT	TTO BE USED IN ANY WAY DETRIMENTAL	TO THE INTERESTS OF PANDUIT CORP.
-------	-------------------------	-------------------------------	------------------------------------	-----------------------------------

Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	6 AWG			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1-1/8 in.			
Stud Size	#10			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	Yes			
Panduit Color Code on Barrel	BLUE			
Panduit Die Index No. on Barrel	P24			
Alternate Industry Die Index No. () on Barrel	(7)			





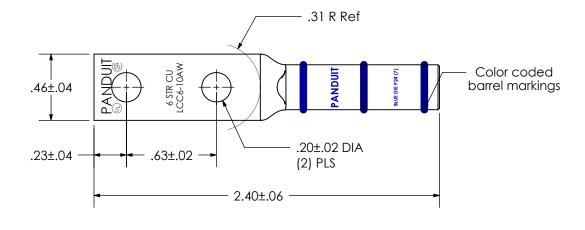

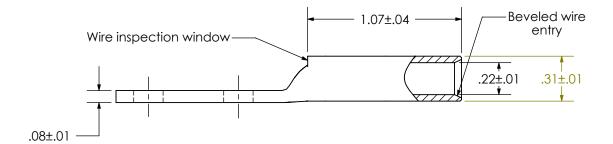

								CORP. TINLEY PARK	X, ILLINOIS
								LCC6-10AW-L	
02	8/12	JHNU	JHNU	REMOVED NAVY NUMBER	N10883SI-LCC6-10AW-CUST	RGB	RGB	Copper Lug - Two-Hole, Long Barrel with N	Window
REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	SCALE N/A DRAWING NO / CAD FILE LCC6-10	AW-CUST