

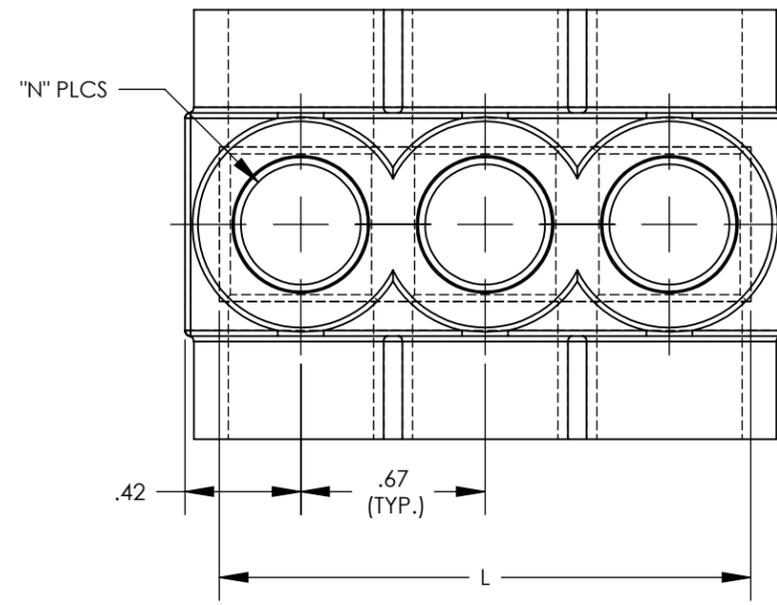
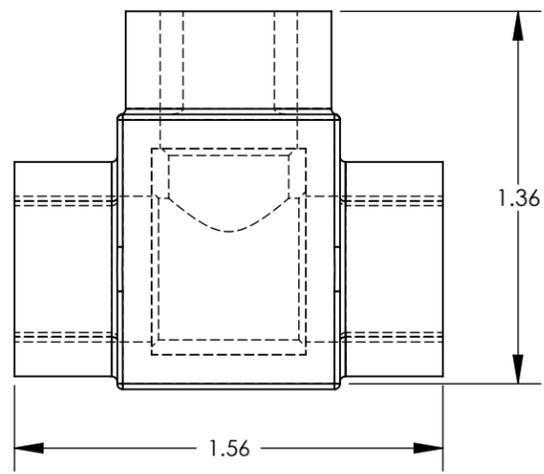


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

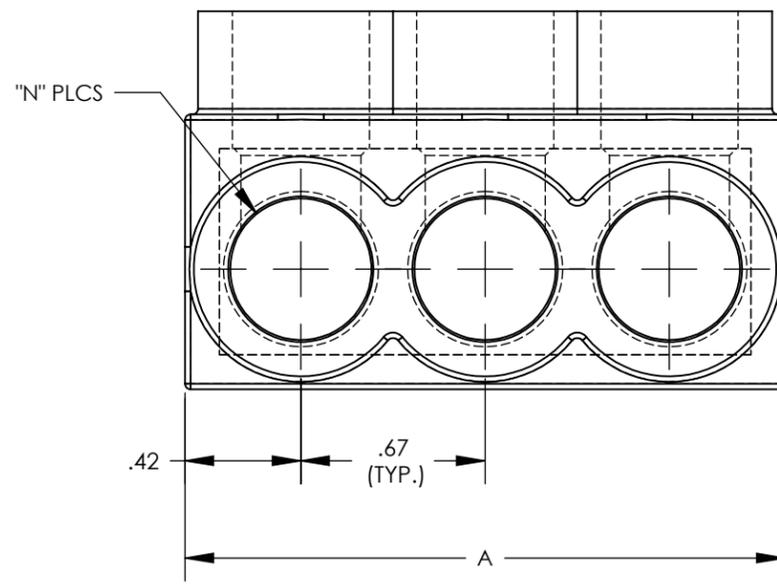

THREE PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED. SEE TABLE FOR DIMENSIONS OF PARTS WITH ADDITIONAL PORTS

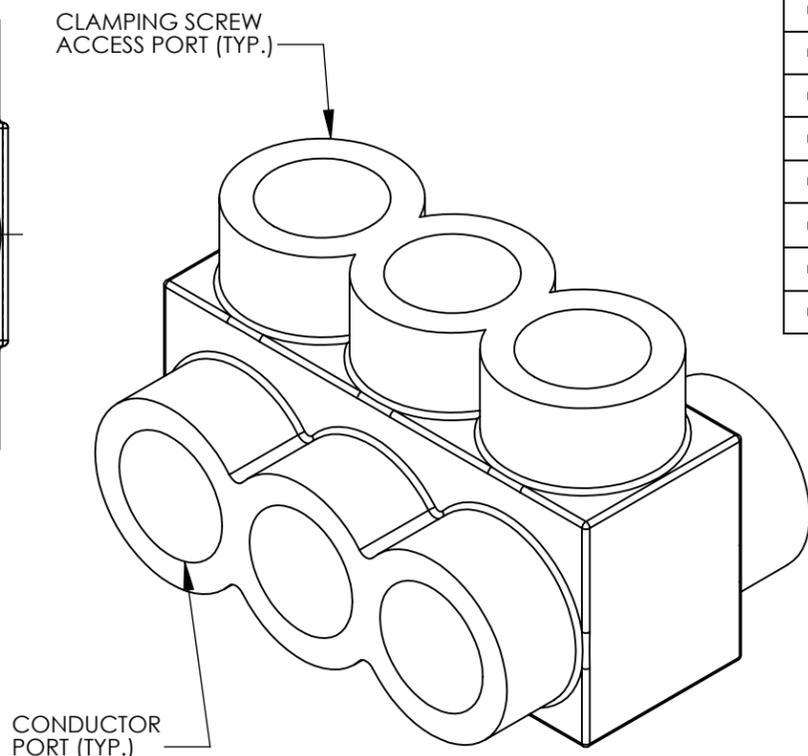

PANDUIT FINISHED GOODS P/N	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	A	L	N	TIGHTENING TORQUE
PCSB350-2-4	350 kcmil - #10 STR #10 SOL	5/16	2	2	4	2.17	1.920	2	2.75 in/lb
PCSB350-3-4		5/16	3	3	6	3.17	2.920	3	
PCSB350-4-3		5/16	4	4	8	4.17	3.920	4	
PCSB350-5-3		5/16	5	5	10	5.17	4.920	5	
PCSB350-6-2		5/16	6	6	12	6.17	5.920	6	
PCSB350-8-2		5/16	8	8	16	8.17	7.920	8	
PCSB350-10-2Y	350 kcmil - #10 STR #10 SOL	5/16	10	10	20	10.17	9.920	10	
PCSB350-12-1Y		5/16	12	12	24	12.17	11.920	12	
PCSB350-14-1Y		5/16	14	14	28	14.17	13.920	14	



- NOTES:**
- UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
 - SEE TABLE FOR WIRE RANGE.
 - STRIP LENGTH: 1.00 +.06/-0
 - FOR TIGHTENING TORQUE SEE TABLE
 - VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
 - TEMPERATURE RATING: 90 °C (CU9AL).
 - CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
 - CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.
 - INSULATION MATERIAL IS CLEAR BLUE PVC.
 - CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
 - ALL DIMENSIONS SHOWN ARE NOMINAL.
 - ONLY ONE CONDUCTOR PER PORT ALLOWED.
 - PACKAGE QTY: -12 = 12 PCS.
-6 = 6 PCS.
-4 = 4 PCS.
 - THIS PART IS RoHS COMPLIANT.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08	11/22	BARK	JHNU	MRWA	A. Revised insulation, clear blue PVC was clear PVC	127186
07	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N41247BB-C41247

TITLE: MULTI-TAP INSULATED CONNECTORS
PCSB350 SERIES
CUSTOMER DRAWING

ITEM REVISION NAME: N41247BB-C41247/08

DATASET FILE NAME: C41247 r08.SLDDRW

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± .02 ANGLES ±

THIRD ANGLE PROJECTION

DRAWN BY: MS DATE: 8/99 CHK: RLS SCALE: NONE

MATERIAL: SEE NOTES

DRAWING NUMBER: C41247

SHEET 1 OF 1 SIZE: B